

JVC®

The Perfect Experience / —

40-INCH PROFESSIONAL LCD DISPLAY MONITOR

GM-H40L2

High performance and reliability. Flexible inputs. Slim design and mountable flush with the wall.

For NTSC AREA



High performance, strong dependability and flexible installation make the GM-H40L2 perfect for professional applications

Creating Systems with Ease

- Wide range of inputs and control connectors
- Slim design with side-vent cooling for flush mounting
- Easily replaceable bezel for applying custom colors

Outstanding Reliability

- No screen burn-in
- Self-diagnostic indicator lights. Anti-theft security lock
- Eco sensor available for self-adjusting brightness level

Enhanced Features


- High-speed input switching
- Digital zoom function
- Picture-in-picture and picture-by-picture displays
- Six languages selectable from the OSD Menu

No longer used only for display purposes, flat panel screens now must be versatile enough to integrate with a wide range of equipment and to be mountable in a variety of positions and locations. Security, longevity and high contrast levels for clear viewing in bright surroundings are also key factors when selecting the right model. JVC's new LCD monitor GM-H40L2 meets all these requirements, having been designed specifically to answer the sometimes extreme demands of today's professional integrators and installers.

Creating Systems with Ease

Wide Range of Inputs and Control Connectors

Whether you are an installer or system integrator, the main concern when selecting a monitor is versatile connectivity. And this is where the GM-H40L2 excels, as it is equipped with an impressive array of standard inputs and external controls.



Connectors on the GM-H40L2

Standard Inputs and Optional Input IF-C Cards

The GM-H40L2 is compatible with a large number of signal formats.

Analog: Composite, Y/C and RGB. Digital: DVI-D, RGB, and HD SDI

STANDARD INPUTS			OPTIONAL INPUT CARDS (2 slots available)			
Signal type	Video Inputs	Input type	Model ref	Slots reqd	Signal type	Video inputs
DVI-D	x 1	DVI-D	IF-CF21HDG	1	HD SDI & SDI	x 2
Analog RGB	x 1	D-sub 15p	IF-CF01PNG	1	Composite	x 1
Composite; YC	x 1	BNC; 4p	IF-CF01CMG	1	RGB / Component	x 1
Component	x 1	D-sub 15p	IF-CF01RBG	2	RGB / Component Active loop-through	x 1

External Controls

Type	Connector	Control
RS-232C	D-Sub 9-pin	via PC
RS-485	RJ 45	via PC
MAKE	RJ 45	Direct
TRIGGER	RJ 45	Direct
IR OUT	RJ 45	via set-top box

The GM-H40L2 offers a variety of external control terminals, such as the widely-used RS-232C and RS-485. Where longer cable lengths are required a MAKE / TRIGGER function is available, as is also RJ45 for LAN control.

Design Structure for Professional Use

Slim Design and Flexible Mounting Possibilities

The GM-H40L2 features a totally **flat rear panel** without any air vents and so the monitor requires no air gap at its rear. This means that installation can be **flush against the wall** or ceiling. Its design is also **slim and symmetrical**. Heat management is by a thermostatically controlled, variable-speed fan that operates silently, meaning that the GM-H40L2 monitor can be just as readily mounted **horizontally or vertically**. The above features combine to enable two units to be **installed back to back**.

Custom Colors Easy to Adopt by Way of Bezel and Rear Panel being Easily Replaced*

The bezel and rear panel are easy to replace, so that the external color of the monitor can be customized to match corporate colors or to blend in with surroundings. Similarly, when the monitor is in a location with direct public access, its outward appearance can then be quickly brought back to new by simply replacing the bezel, if it has become scratched or dented.

*Cabinet replacement should only be carried out by a trained professional.

VESA FDMI™ Standard Compliant Fixture Points

The rear panel incorporates VESA FDMI™ Standard fixture points to ensure that installation will always be quick and simple. (dimensions: 400 mm x 200 mm)

40-INCH PROFESSIONAL LCD DISPLAY MONITOR

GM-H40L2



RM-C2006

Outstanding Reliability

Long-lasting LCD

Unlike plasma monitors, LCD uses backlighting technology to eliminate screen burn-in. And thanks to the **automatic sleep function**, the unit will turn off automatically when no signal is detected from connected equipment after a specified time. This helps to reduce unnecessary use of the backlight, increasing screen life and saving overall energy consumption.

Eco Sensor

Eco sensor automatically detects ambient light levels and adjusts brightness to reduce excessive luminance, helping to provide more comfortable viewing while extending the life of the LCD panel's backlight.

Control Lock

Control buttons are prominently located at the top of the panel to prevent unintentional operation, and these can be locked to deter unwanted operation when the unit is used in public venues such as storefronts and exhibits.

Self-diagnostic LED Indicator

A self-diagnostic LED indicator, which will light up or flash in the event of a malfunction, is located next to the Eco sensor. What's more, the indication can be detected via external control terminals allowing for recognition from a remote location.



Security Lock for Theft Prevention

The GM-H40L2 is fully equipped with security features to lessen the chance of theft. An original ID can be set via the supplied remote control to lock and disable operation. There is also a **security lock key** on the panel mount* that secures the monitor onto the mount.

*Security lock is not available for the tabletop stand.


Array of Enhanced Features

High-speed Input Switching

This feature enables instantaneous switching (less than one second) of two selected inputs and is particularly useful for applications, such as security, which call for high speed input switching.

Pro Version Picture-in-Picture and Picture-by-Picture

The dual image display functions, PIP Pro and PBP Pro, are available via the menu of the GM-H40L2. PIP (Picture-in-Picture) enables the display of a sub-screen – with selectable size and position – within the main screen. PBP (Picture-by-Picture) will display the main screen and the sub-screen together, side-by-side, separated by a user selectable line separating the two screens. It is possible for both functions to be displayed in the widescreen 16:9 ratio and selecting the appropriate input terminal allows you to choose between the main screen and sub-screen.



Digital Zoom Function

The digital zoom function will allow simple creation of a multi-screen system without having to spend extra on costly splitter products.



Selectable OSD Menu Language

It is possible to select six languages from the OSD Menu: English, German, French, Italian, Spanish, and Russian.

Power-on Delay

Once activated, JVC's special Power-on Delay function reduces the load on the studio's main power supply when multiple units are powered up simultaneously.

Hour Meters


Dual hour meters are available. The main meter displays aggregate operating hours while the sub-hour meter displays daily usage time.

Optional IF-C Cards and Applications

Two slots for optional IF units or cards are available, which are located next to the input terminals.

There are 4 units/cards available: 1) RGB & component active-through unit; 2) RGB & component unit; 3) HD/SD-SDI unit; and 4) composite unit.


IF-CF01RBG RGB/Component Active-Through



- Optional IF-C unit for active-through input of analog RGB and analog component signals
- Superb image display of up to UXGA in native resolution
- Compatible with 15K analog RGB signal




IF-CF21HDG HD/SD-SDI with Embedded Audio



- SDI signal chain connection capability via bridge out
- Embedded audio bridged out
- 1080/24pF, 1080/24p and 1080/30p compatibility




IF-CF01CMG RGB/Component



- Optional IF-C unit for input of analog RGB and analog component signals
- Superb image display of up to UXGA in native resolution
- Compatible with 15K analog RGB signal




IF-CF01PNG Composite



- Compatible with NTSC, PAL, SECAM, PAL-M, PAL-N, PAL60, and NTSC4.43
- Capable of handling external sync signals



Rear Terminals

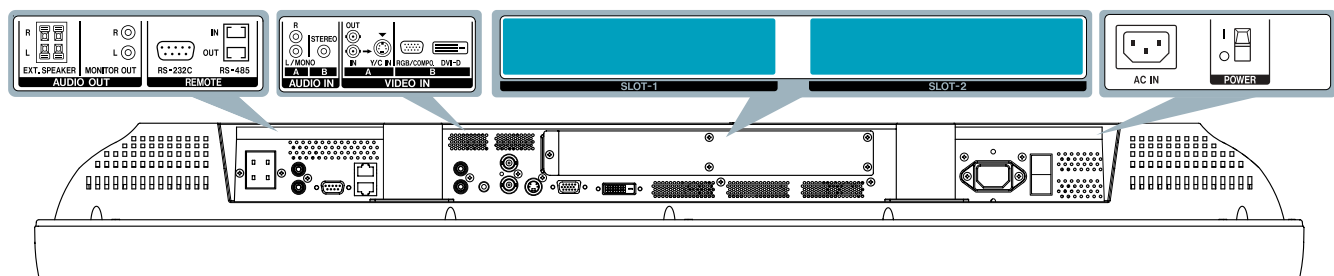


Viewed from underneath

Specifications

Model	GM-H40L2	
Bezel color	Dark Gray	
LCD panel type	Widescreen 40" V diagonal, active matrix TFT display monitor	
Aspect ratio	16:9	
Screen size (W x H)	34-13/16" x 19-9/16" (885 mm x 498 mm)	
Number of pixels	Horizontal 1366 x vertical 768	
Display colors	16.77 million (RGB each of 256 levels)	
Viewing angle	Vertical: 170° / Horizontal: 170°	
Brightness	400 cd/m ² with auto-sensing level adjustment	
Weight	59lbs (26.8 kg)	
Dimensions (W x H x D)	38-7/8" x 23-1/2" x 4-7/8" (986 mm x 595 mm x 123 mm)	
Power requirement	120V/220-240V AC, 50/60Hz	
Power consumption	2.4 A (120V AC), 1.5A (220-240V AC)	
Audio output	Internal	3.4 W total (impedance at 8 Ω)
	External	6 Ω to 8 Ω 4.4 W total (impedance at 6 Ω)

Dimensions

Unit: inch (mm)

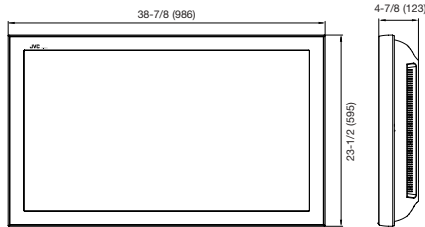

Model	GM-H40L2	
Built-in speakers	Two 4 x 7cm oval, 8 Ω impedance	
Operating environment	Temperature range	0° to +40°C
	Humidity range	20% to 80%, non condensation
Input/output terminals, built-in		
VIDEO IN A	Input	BNC x1, 1 V (p-p) 75 Ω Y/C x 1, Y: 1 V (p-p) 75 Ω; C: 0.286 V (p-p) 75 Ω (NTSC, burst)
	Output	BNC x1, 1 V (p-p) 75 Ω
VIDEO IN B	RGB/COMPONENT	D-sub 3-row 15-pin x1 Video signal: 0.7 V (p-p) 75 Ω Horizontal sync (HD)/Component sync (Cs) HD: 0.3 V (p-p) — 5 V (p-p) 1k Ω (positive-negative) Cs: 0.3 V (p-p) — 5 V (p-p) 1k Ω (positive-negative)
		Vertical sync (VD) VD: 1V (p-p) — 5V (p-p) 1k Ω (positive-negative)
	DVI	x1
	Audio input	Pin-jack x2 (L/R), 500 mV (RMS) high impedance
AUDIO IN B	Audio input	Stereo mini jack x1 (L/R), 500 mV (RMS) high impedance
REMOTE	RS-232C input	D-sub 9-pin x1 (for RS-232C control)
	RS-485 input	RJ-45 pin x1 (for RS-485, MAKE, TRIGGER controls)
	RS-485 output	RJ-45 pin x1 (for RS-485, IR OUT controls)
AUDIO OUT	Monitor output	Pin-jack x2 (L/R), 600 Ω output impedance
	External speaker	Speaker output x2 (L/R), 6 Ω — 8 Ω impedance

*Criteria may vary.

Applicable Signal Format

MODEL	Monitor				Optional Card			
	GM-H40L2		IF-CF01R8G	IF-CF01CMG	IF-CF21HDG	IF-CF01PNG		
DIGITAL / ANALOG INPUT	ANALOG	DIGITAL	ANALOG	ANALOG	DIGITAL	ANALOG		
RGB-SIGNAL FORMAT								
FORMAT	PIXEL	fh (kHz)	fv (Hz)					
VGA	640x400@56Hz (PC-98)	24.8	56.4	YES	—	YES	YES	—
	640x400@70Hz (IBM STD)	31.5	70.1	YES	—	YES	YES	—
	640x480@60Hz (Industry STD)	31.5	59.9	YES	YES	YES	YES	—
WVGA	640x480@72Hz (VESA STD)	37.9	72.8	YES	—	YES	YES	—
	852x480@60Hz (IMAGINE GRAPHICS)	31.5	59.9	YES	YES	YES	YES	—
	800x600@60Hz (VESA G/L)	37.9	60.3	YES	YES	YES	YES	—
XGA	1024x768@60Hz (VESA G/L)	48.4	60.0	YES	YES	YES	YES	—
	1024x768@70Hz (VESA STD)	56.5	70.1	YES	—	YES	YES	—
	1024x768@75Hz (VESA STD)	60.0	75.0	YES	—	YES	YES	—
XGA+	1024x768@85Hz (VESA STD)	68.7	85.0	YES*	—	YES*	YES*	—
	1152x864@75Hz (VESA STD)	67.5	75.0	YES*	—	YES*	YES*	—
	1366x768@60Hz	48.4	60.0	YES	YES	YES	YES	—
WXGA	1280x720@60Hz	44.8	60.0	YES	YES	YES	YES	—
	1280x768@60Hz (iO Data)	47.8	60.0	YES	YES	YES	YES	—
	1366x768@60Hz (iO Data)	47.7	60.0	—	YES	—	—	—
SXGA	1280x1024@60Hz (VESA STD)	64.0	60.0	YES*	YES	YES*	YES*	—
	1280x1024@75Hz (VESA STD)	80.0	75.0	YES*	—	YES*	YES*	—
SXGA+	1400x1050@60Hz	64.0	60.0	YES*	YES	YES*	YES*	—
	1400x1050@60Hz	65.2	60.0	YES*	YES	YES*	YES*	—
UXGA	1600x1200@60Hz (VESA STD)	75.0	60.0	YES*	YES	YES*	YES*	—
Mac	13	640x480	35.0	66.7	YES	—	YES	YES
	16	832x624	49.7	74.6	YES	—	YES	YES
	19	1024x768	60.2	74.9	YES	—	YES	YES
	21	1152x870	68.7	75.1	YES*	—	YES*	YES*
480/60i (RGB15k)	525x858	15.75/15.734	60/59.94	YES	—	YES	YES	
576/50i (RGB15k)	625x864	15.6	50.0	YES	—	YES	YES	

* Fine lines may not display properly as the signal frequencies are higher than the screen resolution.

ANALOG COMPOSITE-SIGNAL FORMAT

FORMAT	TOTAL LINES	PIXEL	fv (Hz)	fh (kHz)	fCLK (MHz)				
NTSC	525	—	59.94	15.734	—	YES	—	—	YES
PAL	625	—	50.00	15.625	—	YES	—	—	YES
SECAM	625	—	50.00	15.625	—	YES	—	—	YES
PAL60	525	—	59.94	15.734	—	YES	—	—	YES
NTSC 4.43	525	—	59.94	15.734	—	YES	—	—	YES
PAL-M	525	—	59.94	15.734	—	YES	—	—	YES
PAL-N	625	—	50.00	15.625	—	YES	—	—	YES

COMPONENT-SIGNAL FORMAT


FORMAT	ACTIVE LINES	PIXEL	fv (Hz)	fh (kHz)	fCLK (MHz)				
480/60i (SMPT 125M)	483	720x483	60/59.94	15.75/15.734	13.5	YES	—	YES	YES (with E.A.*)
576/50i (ITU-R BT.601)	576	720x576	50.00	15.625	13.5	YES	—	YES	YES (with E.A.*)
480/60p (SMPT 293M)	480	720x483	60/59.94	31.5/31.469	27.00/26.97	YES	—	YES	—
576/50p (ITU-R BT 1358)	576	720x576	50.00	31.25	27.00	YES	—	YES	—
720/60p (SMPT 296M)	720	1280x720	60/59.94	45/44.955	74.25/74.18	YES	—	YES	YES (with E.A.*)
720/50p (SMPT 296M)	720	1280x720	50.00	37.5	74.25	YES	—	YES	YES (with E.A.*)
1035/60i (SMPT 240M)	1035	1920x1035	60/59.94	33.75/33.716	74.25/74.18	YES	—	YES	YES (with E.A.*)
1080/60i (SMPT 274M)	1080	1920x1080	60/59.94	33.75/33.716	74.25/74.18	YES	—	YES	YES (with E.A.*)
1080/50i (SMPT 274M)	1080	1920x1080	50.00	28.125	74.25	YES	—	YES	YES (with E.A.*)
1080/24psf (SMPT RP211)	1080	1920x1080	48.00	27.00	74.25	YES	—	YES	YES (with E.A.*)
1080/24p (SMPT 274M)	1080	1920x1080	24/23.98	27.00/26.97	74.25/74.18	—	—	—	YES (with E.A.*)
1080/30p (SMPT 274M)	1080	1920x1080	30/29.97	33.75/33.716	74.25/74.18	—	—	—	YES (with E.A.*)

* E.A.: Embedded Audio.

E. & O. Design and specifications subject to change without notice. VESA FDMI Standard stands for Video Electronics Standards Association Flat Display Mounting Interface Standard. VESA, FDMI and the VESA Mounting Compliant logo are trademarks of the Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand names and product names are trademarks, registered trademarks, or trade names of their respective holders. Some accessories may not be available in certain areas. All screen images and print samples in this catalogue are simulated. Copyright © 2005 Victor Company of Japan, Limited. All Rights Reserved.


Accessories

Desktop Stand
TS-CLO3SG (optional)




- Rotating base
- Durable yet stylish aluminum diecast frame

Wall Mounting Unit
TS-CV20WG (optional)



- VESA FDMI™ Standard compliant (Dimensions: 400 mm x 200 mm)
- Slim design
- Fixed type

Remote Control
RM-C2006 (supplied)





DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY
DIVISION OF JVC AMERICAS CORP.
1700 Valley Road, Wayne, N.J. 07470
TEL: (973) 317-5000, (800) 582-5825 FAX: (973) 317-5030
Internet Web Site <http://www.jvc.com/pro>
E-mail: proinfo@jvc.com

JVC CANADA INC.
21 Finchdene Square, Scarborough, Ontario M1X 1A7
TEL: (416) 293-1311 FAX: (416) 293-8208
Internet Web Site <http://www.jvc.ca/en/pro/>

Printed in Japan
ICN-0344

"JVC" is the trademark or registered trademark of Victor Company of Japan, Limited.