

The Calibur digital video multiplexer/recorder (DVMR^e) is ideal for applications where high quality multiplexed digital recording is required and economy and ease of use are desired. The DVMR^e-16CD has an internal HDD (hard disk drive) which eliminates the need for the outdated analog VCRs.

The “e” in DVMR^e-16CD means Ethernet ready. Review, retrieve and send images or clips from the DVMR^e-16CD through your LAN/WAN network—all while continuing to record. You can even watch live action at the DVMR^e through your network or take a “snapshot” for sending on email. The DVMR^e-16CD improves playback picture quality and eliminates hours spent searching VCR tapes for critical events. Direct access to select events is done via a simple on-screen search menu and front panel controls. Search by alarm, time, date, camera or cash register/ATM text. No PC or complicated software is needed. With optional DAT, AIT or CD-Writer digital recording accessories, continuous recordings, images and clips can be archived automatically for days, weeks or longer.

The DVMR^e-16CD is set up through QuickInstall on-screen menus. Record and playback



The DVMR^e-16CD, a 16-camera, color, duplex digital video multiplexer/recorder


Features

- Multiplexer functionality with built-in, state-of-the-art digital recording
- Ethernet LAN/WAN capability, TCP/IP protocol
- Live “look-in” through your network
- Continue recording and review, retrieve, store images on your network
- WaveReader software supplied with DVMR^e
- Wavelet compression
- Event or various time lapse record speeds from 2- or 3-hour mode, up to 960-hour mode
- Video motion detection (intrusion) and activity detection with active feedback setup scope
- Pre- and post-alarm recording
- Selectable record image quality: high, medium and extended record duration
- Archive on DAT, AIT or recordable CDs
- Secret watermark verifies that recorded or shared images have not been altered
- Save images as JPEG or BMP for easy distribution on email
- ADM auto delete mode to automatically delete recordings after 30 days
- Electronic PTZ
- Motorized PTZ control with CBR-KB3/J keyboard*
- Cascade up to 31 DVMR^es via RS-485
- RS-232 and/or RS-485 remote control, setup upload/download, and diagnostics
- AutoInstall™ with AutoList™, automatic termination, automatic camera detection, automatic gain control

* Call Kalatel for a list of supported third-party PTZ hardware. Additional Calibur hardware may be required in some systems.

functions closely emulate a security VCR, so operation is intuitive. There are no new technologies to learn.

The DVMR^e-16CD. Exceptional digital quality recording, multiplexer functionality, automation, internal and external digital archiving, easy setup and use.

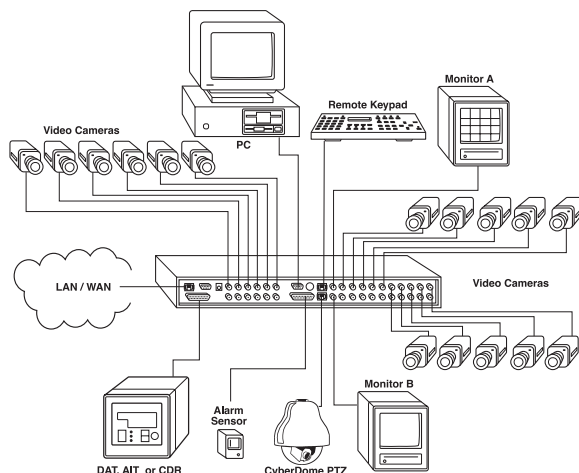

System Diagram

The DVMR^e-16CD connects to up to 16 cameras. Two monitors can be used to view multiscreen in play and live or switched full-screen display. Archiving can be done to DAT/AIT/CD via SCSI port. LAN/WAN connection via RJ45 connector. External alarm sensors can be connected via DB25. Remotely controlled by a PC via RS-232 or RS-485 port. A total of 32 DVMR^es and keyboards can be connected to the same RS-485 network.

Technical Specifications

Archive

DAT or AIT or CD-Writer: 1 50-pin SCSI-2 port, DB 50-S-SCSI (reversed) (Contact Kalatel for recommended models)

Network

1 RJ45 connection

Video

Display memory: 2048 x 512 memory array, 8 MB total display memory
Colors: YUV 4:2:2, 16.8 million colors
Grayscale: 256 levels
Horizontal resolution: 720 pixels
Vertical resolution: 484 active lines NTSC/EIA, 576 active lines PAL/CCIR

Alarm Handling

Alarm inputs: 16 programmable NO or NC in menus.
Alarm outputs: 2 form C relays, each NO and NC. Rated 0.5 A continuous, 1.0 A momentary.
Alarm latching: 3 settings: latched; transparent; timed-out. Programmable 1-100 seconds.
Alarm recording: Automatic priority control, interleaved or exclusive, or none. Programmable.
Alarm displays: Automatic alarm multiscreens. Programmable

Video Motion and Activity Detection

Zones per camera: 256, 16 x 16 grid
Sensitivity settings: 10 levels
Gray levels per zone: 256 levels
False alarm rejection processing: 3 levels
Size discrimination: 256 levels
Recording priority: 2x, 4x, interleaved, or none
Status output: Link to relay

Recording


Hard drive: 15 GB - 30 GB standard to 75 GB optional (or larger-call Kalatel)
Record speed: Selectable; event, 2/3, 12, 24, 48, 72, 168, or 960 hr (30/25 fps, 12 fps, 5 fps, 3 fps, 2 fps, 1 fps, .125 fps.)
Compression: Wavelet format, standard, medium and high resolution settings selectable per camera

Miscellaneous

Input voltage: 12 VDC, 90 V - 264 V AC/DC adapter included
Power: 35 W nominal
Temperature: 0 to 40° C (32 to 104° F), operating
Relative humidity: 90%, noncondensing
Dimensions: 17.5 x 14 x 1.7 in. (444 x 360 x 43 mm)
Weight: 9 lbs. (4 kg)

Ordering Information

DVMR^e-16CD: Duplex, color, NTSC/EIA
DVMR^e-16CDX: Duplex, color, PAL/CCIR
CBR-KB3(X): Optional remote keyboard, includes motorized PTZ control capabilities
CBR-KB3/J(X): Same as CBR-KB3 but with proportional joystick control
CBR-RK2: Optional 1U rackmount kit
CBR-PB2: Optional probridge for PTZ applications (contact Kalatel for available models)

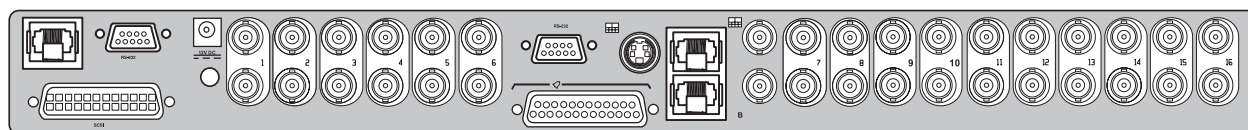

Rear Panel Inputs and Outputs

Inputs

Camera: 16 looping, BNC connectors, NTSC/EIA or PAL/CCIR compatible, auto terminating.
Conditioning: AGC, 0.7 to 2.0 Vp-p video accepted.
Termination: Automatic, 75 ohm or Hi-Z if looped.

Outputs

Monitor: 3: 1 MON-A multiscreen output, BNC connector NTSC/EIA or PAL/CCIR compatible; 1 MON-A multiscreen output, S-VHS, 4-pin mini-DIN; 1 MON-B full-screen switched, BNC connector, NTSC/EIA or PAL/CCIR compatible.
SCSI-2: 1 50-pin SCSI-2 port, DB 50-S-SCSI

Kalatel

PMB 225, PO Box 3004
 Corvallis, OR, USA 97339
 www.kalatel.com

Americas

toll free 800-469-1676
 tel 541-754-9133
 fax 541-754-7162

Asia

tel 852-2907-8108
 fax 852-2142-5063

Australia

tel 61-3-9259-4700
 fax 61-3-9259-4799

Europe

tel 32-50-51-32-34
 fax 32-50-51-66-28