


TRANSMITTERS & RECEIVERS

Classic Series

HTX001/HRX001
HTX002/HRX002

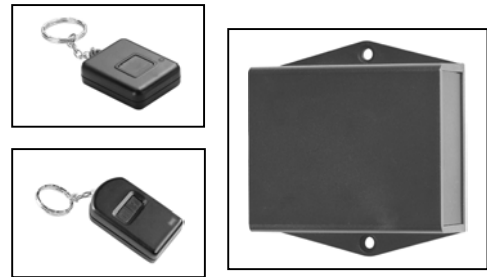

One and Two Channel Transmitters
One and Two Channel Receivers

Applications:

- Emergency
- Intrusion
- System Arm/Disarm
- Lighting Control
- General Switching

Features:

- Low cost – excellent performance
- Highly functional – multiple purpose
- 433.92 MHz – ETSI 300/220
- Other Frequencies available to order
- Factory pre-coded to match
- Additional un-coded key-fobs available

Compatible Products:

The HTX001 and HTX002 transmitters are compatible only with the HRX001 and HRX002 receivers and no other Keystone products

Technical Specifications:

Colour: Black

Receiver Voltage Supply: 10-16VDC

Transmitter Battery: 1 x GP23A (12V)

No of Code differs: 531,441

Transmitter Current Consumption:
Operating: 5mA **Stand-by:** 0mA

Receiver Current Consumption:
Operating: 7mA **Stand-by:** 6mA

Operating Temperature: -10 to + 65C

Receiver Circuit: Super-regenerative

Drive Output: 1A (Relay) .5A (Transistor)

Size:

HTX001	52 x 35 x 13mm
HTX002	58 x 35 x 13mm
HRX001/2	65 x 60 x 25mm

Model	Description
HTX001/HRX001	Pre-coded 1-CH Transmitter & Receiver (Voltage output) Set
HTX001/HRX001R	As above, but Receiver has 1-CH momentary Relay output
HTX002/HRX002	Pre-coded 2-CH Transmitter & Receiver (Voltage output) Set
HRX002/RX002TP	As above, but Receiver has 2-CH toggle latching Relay output
HTX001UC	Additional un-coded 1-CH Key-fob Transmitters
HTX002UC	Additional un-coded 2-CH Key-fob Transmitters



Keystone Electronics

W infrith Technology Centre, W infrith Newburgh, Dorchester, Dorset DT2 8DH

Tel: +44 (01305) 853090 Fax: +44 (01305) 851660

Email: sales@keystone-electronics.co.uk Website: www.keystone-electronics.co.uk