




## ■ Outward Appearance

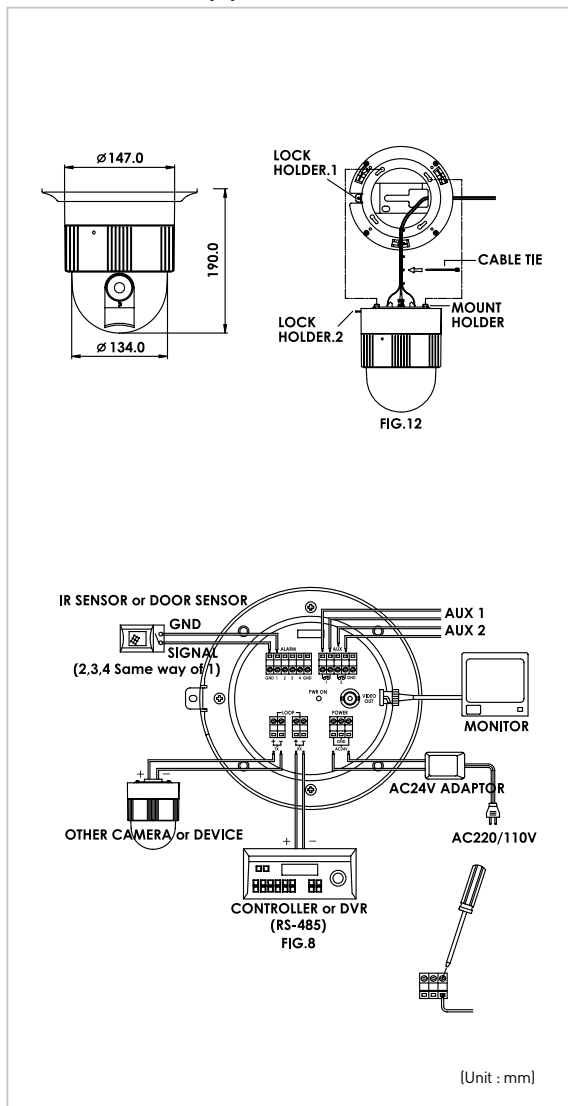

## ■ Features

- Interior dome camera with refined design
- 22× optical zoom
- 1/4" SONY SUPER HAD CCD / Horizontal Resolution 480TV over and High Quality Image
- S/N Ratio 48dB over
- IP66 Based Waterproof Design
- Equipped with backlight compensation function (BLC)
- 64 Preset

## ■ Specifications

General Spec	KD-S2211	
	NTSC	PAL
CCD Type	1/4" Sony Super HAD CCD	
Total No. Pixels	811(H) × 508(V)	795(H) × 596(V)
Scanning System	525 Lines	625 Lines
Horizontal Resolution	480 TV Lines over	
Lens	Optical	26 × Optical Zoom
	Digital	2X ~10X Variable
Sensitivity to Light	Normal Mode	1Lux[30 IRE]
	Night Mode	Not available
PAN	Rotation Angle	360°
	Speed(Manual)	0.5° ~ +150° /sec(64steps)
	Speed(Preset)	300° /sec
Tilt	Rotation Angle	0° ~90°
	Speed(Manual)	0.5° ~ + 45° /sec(64steps)
	Speed(Preset)	200° /sec
Video Output	Composite Video Output 75ohm Terminated	
Wide Dynamic Range	On/Off/Auto	
S/N Ratio	0.48dB over	
Video Output	1.0Vp~p/75 Ohm Composite	
Operating Temperature	-10°C ~ +50°C	
Voltage	AC24V 60/50Hz 850mA	
Power Consumption	20W	
Dimension	147(∅) × 190mm(H)	
Weight	1.9kg	