


# KSS-400N | STORAGE



## Outward Appearance

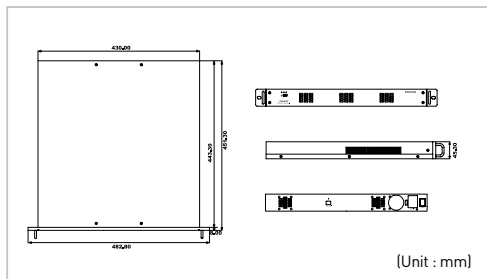


## Specifications

General Spec	Detail
Capacity	Max 4ea HDD(ATA6 Drive / Large sized HDD)
Compatible	IEEE1394 Device Plug & Play
Interface	IEEE1394 [800Mbps]
Power	AC100~120V ~5A 50/60HZ AC200~240V ~3A 50/60HZ
Dimension	476(W) × 430(H) × 468(D) 1U 19inch Rack Mount Chassis

# KQD-1404 | QUAD



## Outward Appearance

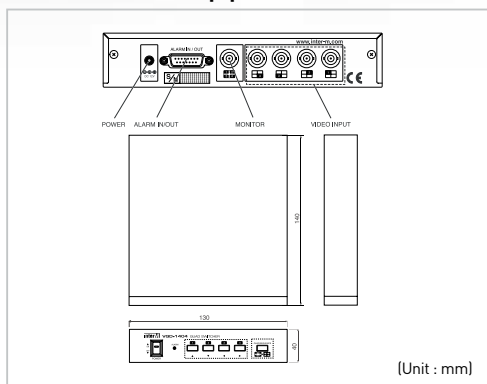

## Specifications

General Spec	Detail	
Camera	Input	4 ports (BNC, CVBS)
	Loop Out	4 ports (BNC, CVBS)
Monitor	Output	2 ports (BNC, CVBS)
	SPLIT	16 ports (BNC, CVBS)
Display	FREEZE	1 port (Mini-Din, S-VHS)
	SEQUENCE	1 port (DB15-3R, RGB)
Alarm	Input	16 ports (DB15-3R, TTL Drive)
	Output	1 port (DB15-3R, Dri Contact)
Operating Temperature	-10°C ~ +50°C	
Division	2, 3, 4 Mode	
Power Consumption	5W	
Voltage	DC12V 0.8A~18V 0.5A	
Dimension	130(W) × 44(H) × 125(D)	
Weight	0.5Kg	