








# KSR 7 SERIES

## KSR-708

World's Best Company in Digital Video Recording  
Kodicom provides high quality display pictures with outstanding recording speed.




### Main Functions

-  **REAL TIME MONITORING**  
Simultaneous live images
-  **COMPACT PICTURE STORAGE**  
Images are compressed to an average file size between 2~10Kb per picture using MPEG4 Algorithm
-  **EASY PICTURE RETRIEVAL**  
Instant picture retrieval by date/time and camera number
-  **EVENT CONTROLLED RECORDING**  
Reduces the amount of data and automatically records specific events
-  **REMOTE CONTROL**  
Remote Control of PTZ cameras & other electronic devices
-  **PICTURE TRANSMISSION OVER NETWORK**  
High quality picture transmission over PSTN, ISDN & LAN network
-  **MULTI SCREEN MONITORING**  
1, 4, 9 Split Screen available

Digital Video Recorder(Non-PC based)

# KSR-708 Hot


### Front/ Rear View

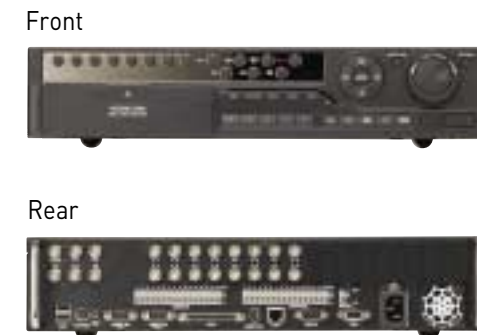

### Features

- High Quality Realtime Display – Max. 240fps(NTSC) 200fps(PAL)
- High Quality and High Speed Recording – Max. 240fps(NTSC) 200(PAL)
- Various Resolutions on Display and Recording – 704×480, 704×240, 352×240(NTSC), 704×576, 704×288, 352×288(PAL)
- MPEG4
- 1, 4, 9 Division
- Watchdog Function
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface

### Outward Appearance

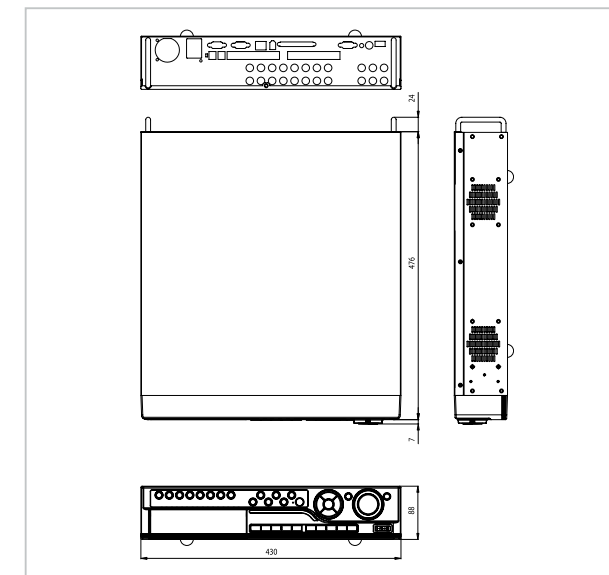

### Specifications

Model		KSR-708
Display	Speed	NTSC : 240fps PAL : 200fps
	Screen Division	1, 4, 9 Division
Recording	Max. Speed (@CIF)	NTSC : 240fps PAL : 200fps
	Resolution	NTSC : 704×480, 704×240, 352×240 PAL : 704×576, 704×288, 352×288
	Recording Option	Continuous, Motion, Sensor, Pre-Alarm
Video	Format	NTSC/PAL
	CODEC	MPEG4
	Input	8ch
Audio	Output	VGA, CVBS, S-Video, Programmable spot out (1ch quad, 4ch full)
	Input	8ch (line input)
	Output	1ch
Alarm	CODEC	ADPCM
	Input	8 Ports
Network	Output	4 Ports
	Transmission	Ethernet (RJ45), PSTN (optional)
Backup	Protocol	TCP/IP (support dynamic IP)
	Device	USB, CD-RW, SCSI, IEEE1394, Network, DVD-RW (optional)
Other Function	Remote Control	Remote Software (CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	W/D Function	Yes
	Image Authentication	Watermark
	Language	10 Languages
	Password	Multi-Level User Password Authorization
USB	2 Ports (USB2.0)	
Working Temperature	0°C ~ +50°C	
Power Source	AC 100 ~ 240V, 50/60Hz	
Dimensions	430mm(W) × 88mm(H) × 483mm(D)	
Weight (net)	10.5Kg (23.1lbs)	

※ Specifications subject to change without notice.

### Functions by Screen



### Application

Some recommended installation areas are Securities Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

RECORDERS

CAMERAS

ACCESSORIES