




## Specifications

Model	LPT-A100L	
Angular Travel	Pan (Manual / Auto)	320° / 290°
	Tilt (Up / Down)	20° / 30°
Speed	Pan (High / Low)	6.2° / Sec   4.5° / Sec
	Tilt	4.5° / Sec
Controller	RS-232C / 422 / 485	Yes
	Camera	AD Key
Power Supply	DC 12V, 1.0 A	
Operation Temperature	0 °C ~ 40 °C	
Safekeeping Temperature	-20 °C ~ 60 °C	
Power Consumption	15W	
Weight	1.3kg	
Load Rating	5kg	
Dimensions (W x H)	ø136 x 106mm	

## Feature


- Compact Pan/Tilt driver
- Easy to install : Rx receiver included
- Panning Speed controllable
- Interface through RS232C/422/485
- Controllable directly with DVR without Rx receiver
- Compatible with LG zoom cameras (Recommended model : LG 6 Pin Din Zoom Cameras)

## Rear View

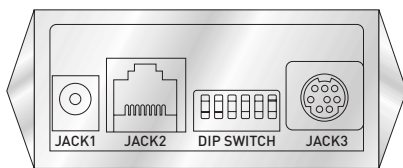

## Interface

### Control (RS232C / 422 / 485)

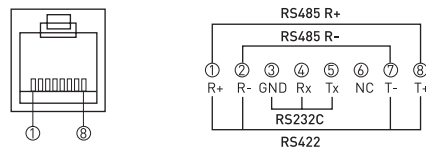

### Camera



### ID SELECT (PAN TILTER ID)

