



CMD 2082

ATR 700TVL Color Mini Dome Camera




Features

- Resolution of 700TV Lines
- Adaptive Tone Reproduction(ATR)
- Noise Reduction(2D-NR)
- High Light Compensation(HLC)
- Color Rolling Suppression(ANTI CR)
- White Balance
- On Screen Display(OSD)
- Privacy Zone



Dimensiones Dome: $\phi 62.2$, Base & Fix Ring: $\phi 110 \times 45$ mm

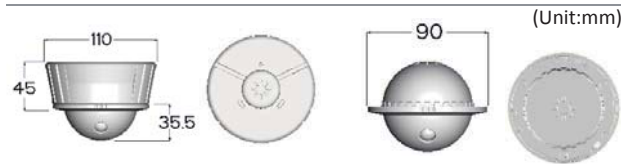

Dome Camera		ATR 700TVL Color Mini Dome Camera		
Series Number		CMD2082		
Model		CMD2082N/P3.6	CMD2082N/P6	
Lens	Focal Length	3.6mm	6.0mm	
	Iris	F2.0	F1.8	
	Angle of View	H	73°	44.5°
		V	54.5°	33.1°
	D	92°	56°	
Power Input Voltage		DC12V(±10%)		
Pick Up Element		Sony 1/3" Exview HAD CCD Sensor		
Effective Pixels	NTSC	976(H) x 494(V) [NTSC]		
	PAL	976(H) x 582(V) [PAL]		
Chip Size		5.58mm(H) x 4.67mm(V)		
H/V Sync. Frequency	NTSC	15.734KHz / 59.94Hz [NTSC]		
	PAL	15.625KHz / 50Hz [PAL]		
Scanning System		2:1 Interlace		
Menu Control		OSD Control		
Sync. Mode		Internal		
Resolution		700 TV Lines		
Min. Illumination		0.2 Lux / F1.8		
S/N Ratio		More than 50dB (AGC-OFF)		
Auto Gain Control		AUTO / MANUAL		
White Balance		ATW / PUSH / USER1 / USER2 / ANTI CR / MANUAL / PUSH LOCK		
Shutter	Auto	1/60(1/50)S - 1/100,000S		
	Manual	1/60(1/50)S, 1/100(1/120)S, 1/250S, 1/500S, 1/1,000S / 1/2,000S / 1/4,000S / 1/10,000S		
Adaptive Tone Reproduction	Luminance	LOW / MID / HIGH		
	Contrast	LOW / MIDLOW / MID / MIDHIGH / HIGH		
Back Light Compensation		OFF / BLC / HLC(High Light Compensation)		
Noise Reduction		Y / C / Y/C / OFF		
Picture Adjust		MIRROR / BRIGHTNESS / CONTRAST / SHARPNESS / HUE / GAIN		
Privacy Masking		ON / OFF		
Privacy Masking Zone		8 Zones		
OSD Language		ENGLISH/JAPANESE/GERMANS/FRENCH/RUSSIAN/PORTUGUESE/SPANISH/SIMPLY CHINESE		
Video Output		CVBS1.0Vp-p, 75Ohm		
Gamma Characteristic		$\gamma=0.45$		
Power Consumption		1.9W		
Operating Temperature		- 1 0°C - +50°C (1 4°F - 122°F)		
Dimension		Dome: $\phi 62.2$, Base & Fix Ring: $\phi 110 \times 45$ mm		
Weight		350g		