



DVR204B

Home Series

DVR

H.264 DVR Surveillance Recording System




Features

- H.264 real time Full D1 live, D1 120fps recording and playback.
- 3G mobile phone supported.
- GUI graphics control interface and user friendly.
- Support CMX (Central control system), multiple DVR can be connected via network.
- Support SATA / SATAII interface.
- Send event message via SMS and e-mail.
- Send recorded event file via FTP.
- Send event message via Push Notification.



Dimensions 290 (W) x 260 (D) x 52 (H)



DVR		
Model	DVR204B	
Video System	NTSC / PAL	
Control Panel	Yes	
Compression	H.264	
Video Input	BNC X 4 (1 Vp-p,75Ω)	
Video Output	BNC X 1 / VGA X 1	
Audio Input / Output	Input 1 / Output X1 / RCA	
Audio Backup	Yes	
Recording Frame	NTSC 120fps / PAL 100fps	
Recording Resolution	D1	120fps(720x480) / 100fps(720x576)
	Half D1	120fps(720x240) / 100fps(720x288)
	CIF	120fps(352x240) / 100fps(352x288)
Recording Images Quality	5 Levels (Lowest / Low / Normal / High / Highest)	
Recording Mode	Manual / Event (Motion, Alarm) / Filing	
Search Mode	Time / Event (Motion, Alarm)	
Display Mode	1,4	
Mode	Enlarge 8 times, PIP, Change Channel Cycle	
Languages	Chinese, English, Multi-language	
Playback Speed	Times 2, 4, 8, 16, 32, 64	
SATA / SATAII HDD	1 x HDDs Max. (3TB)	
USB Backup	USB2.0 Flash Memory Stick	
Network Backup	Support	
Network Connection	TCP / IP, DHCP, LAN, 3G, DDNS, PPPoE	
Remote Monitoring Software	Yes (AP Program, IE, CMX)	
Remote Alarm Notification	E-mail, SMS	
Push Notification (Mobile Security)	Yes	
Motion Detection	NTSC: 22x15 / PAL: 22x18 (Grid)	
Alarm Recording Time	1-60 Seconds Adjustable	
Video Loss Detection	Yes	
Mobile phone connection	Yes	
Buzzer	Yes	
PTZ Control / RS485	Yes	
Password Control / Keypad Lock	Yes	
Power	AC100 – 240V/in, DC12V (4.17A/60W)	
Dimension	290mm (W) x 260mm (D) x 52 (H) mm	
Weight	1.7kg	
Abnormal Detection	Watchdog Program	



DVR208B

Home Series


DVR

H.264 DVR Surveillance Recording System




Features

- H.264 real time Full D1 live, D1 120fps recording and playback.
- 3G mobile phone supported.
- GUI graphics control interface and user friendly.
- Support CMX (Central control system), multiple DVR can be connected via network.
- Support SATA / SATAII interface.
- Send event message via SMS and e-mail.
- Send recorded event file via FTP.
- Send event message via Push Notification.

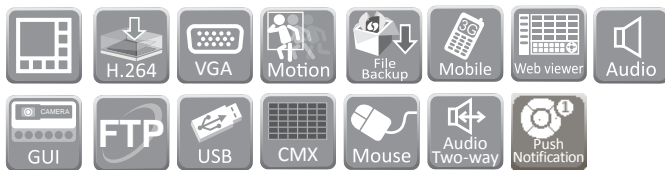

Dimensions 360 (W) x 308 (D) x 60 (H)



DVR		DVR208B
Model		DVR208B
Video System		NTSC / PAL
Control Panel		Yes
Compression		H.264
Video Input		BNC X 8 (1 Vp-p,75Ω)
Video Output		BNC X 1 / VGA X 1
Audio Input / Output		Input 1 / Output X1 / RCA
Audio Backup		Yes
Recording Frame		NTSC 240fps / PAL 200fps
Recording Resolution	D1	120fps(720x480) / 100fps(720x576)
	Half D1	240fps(720x240) / 200fps(720x288)
	CIF	240fps(352x240) / 200fps(352x288)
Recording Images Quality		5 Levels (Lowest / Low / Normal / High / Highest)
Recording Mode		Manual / Event (Motion, Alarm) / Filing
Search Mode		Time / Event (Motion, Alarm)
Display Mode		1, 4,6,9
Mode		Enlarge 8 times, PIP, Change Channel Cycle
Languages		Chinese, English, Multi-language
Playback Speed		Times 2, 4, 8, 16, 32, 64
SATA / SATAII HDD		2 x HDDs Max. (3TB)
USB Backup		USB2.0 Flash Memory Stick
Network Backup		Support
Network Connection		TCP / IP, DHCP, LAN, 3G, DDNS, PPPoE
Remote Monitoring Software		Yes (AP Program, IE, CMX)
Remote Alarm Notification		E-mail, SMS
Push Notification (Mobile Security)		Yes
Motion Detection		NTSC:22x15 / PAL:22x18 (Grid)
Alarm Recording Time		1-60 Seconds Adjustable
Video Loss Detection		Yes
Mobile phone connection		Yes
Buzzer		Yes
PTZ Control / RS485		Yes
Password Control / Keypad Lock		Yes
Power		AC100 – 240V/in, DC12V (5A/60W)
Dimension		360mm (W) x 308mm (D) x 60mm (H)
Weight		2.5kg
Abnormal Detection		Watchdog Program



DVR216B

Home Series


DVR

H.264 DVR Surveillance Recording System




Features

- H.264 real time Full D1 live, D1 120fps recording and playback.
- 3G mobile phone supported.
- GUI graphics control interface and user friendly.
- Support CMX (Central control system), multiple DVR can be connected via network.
- Support SATA / SATAII interface.
- Send event message via SMS and e-mail.
- Send recorded event file via FTP.
- Send event message via Push Notification.

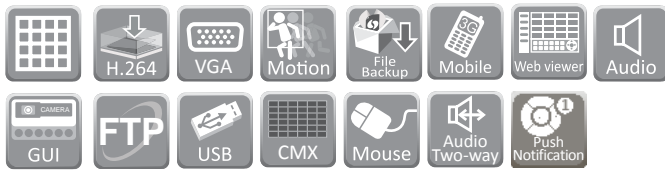

Dimensions 360 (W) x 308 (D) x 60 (H)



DVR		
Model	DVR216B	
Video System	NTSC / PAL	
Control Panel	Yes	
Compression	H.264	
Video Input	BNC X 16 (1 Vp-p,75Ω)	
Video Output	BNC X 2 / VGA X 1	
Audio Input / Output	Input 4 / Output X1 / RCA	
Audio Backup	Yes	
Recording Frame	NTSC 480fps / PAL 400fps	
Recording Resolution	D1	120fps(720x480) / 100fps(720x576)
	Half D1	240fps(720x240) / 200fps(720x288)
	CIF	480fps(352x240) / 400fps(352x288)
Recording Images Quality	5 Levels (Lowest / Low / Normal / High / Highest)	
Recording Mode	Manual / Event (Motion, Alarm) / Filing	
Search Mode	Time / Event (Motion, Alarm)	
Display Mode	1,4,9,13,16	
Mode	Enlarge 8 times, PIP, Change Channel Cycle	
Languages	Chinese, English, Multi-language	
Playback Speed	Times 2, 4, 8, 16, 32, 64	
SATA / SATAII HDD	2 x HDDs Max. (3TB)	
USB Backup	USB2.0 Flash Memory Stick	
Network Backup	Support	
Network Connection	TCP / IP, DHCP, LAN, 3G, DDNS, PPPoE	
Remote Monitoring Software	Yes (AP Program, IE, CMX)	
Remote Alarm Notification	E-mail, SMS	
Push Notification (Mobile Security)	Yes	
Motion Detection	NTSC: 22x15 / PAL: 22x18 (Grid)	
Alarm Recording	1-60 Seconds Adjustable	
Video Loss Detection	Yes	
Mobile phone connection	Yes	
Buzzer	Yes	
PTZ Control / RS485	Yes	
Password Control / Keypad Lock	Yes	
Power	AC100 – 240V/in, DC12V (5A/60W)	
Dimension	360mm (W) x 308mm (D) x 60mm (H)	
Weight	2.7kg	
Abnormal Detection	Watchdog Program	