



Creativity Progress & Excellence

Network Product





IPR424ESX / IPR428ESX

Network Products_1080P

IMEGAPRO


Day & Night 1080P HD Vari-Focal
IR IP Camera



Features

- Full HD 2 megapixel CMOS image sensor
- True H.264 AVC / MPEG-4 part 10 real-time video compression
- H.264 and Motion JPEG multi-profile video streaming
- 3D noise reduction (MCTF)
- 2D WDR function
- Digital PTZ supported
- Face / Tampering / Audio / Motion detection alarm function
- Cable managed housing and bracket
- High efficiency IR LED, radiant distance up to 55m
- Day & Night (IR cut removable)
- 2-way audio supported
- Digital I/O : 1 in, 1 out
- ONVIF supported

Dimensions

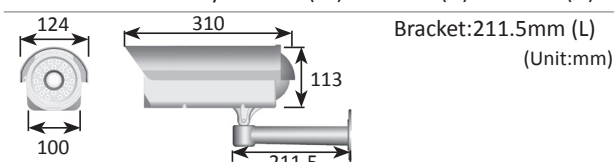

IP CAMERA SERIES			
Day & Night 1080P HD Vari-Focal IR IP Camera			
Model		IPR424ESX3.6	IPR428ESX3.6
Lens	Focal Length	3.3 – 12 mm	
	Iris	F1.4	
	Angle of View	H	79.3° – 29.8°
		V	59.4° – 22.4°
		D	99° – 37.3°
Pick Up Element		1/2.7" CMOS image sensor	
Effective Pixels		1920 (H) x 1080 (V) = 2,073,600 (pixel)	
Chip Size		5.856mm (H) x 3.276mm (V)	
Scanning System		Progressive Scan	
Infrared Cut Filter		Auto / Schedule / Day (Color) / Night (Mono)	
Min. illumination		0.1 Lux at F1.4 (Low Light Mode) / 0 Lux with IR LED ON	
White Balance		Auto / Tungsten / Indoor / Fluorescents1 / Fluorescents2 / Outdoor1 / Outdoor2	
Back Light Compensation		Off / On	
Electronic Shutter		1/30(25)s – 1/8000s	
Sense Up		Off / 1 Frame / 2 Frames / 3 Frames / 7 Frames	
Sense Up +		Yes	
Auto Gain Control		36 dB Variable Gain	
3D Noise Reduction		Off / 1 – 32 Selectable	
2D WDR		Off / On	
Privacy Masking		Off / On (4 zones)	
Image Effects		Brightness, Contrast, Hue, Saturation, Sharpness, Mirror, Flip	
Live Video Output		CVBS 1.0Vp-p, 75 ohm, BNC connector	
Audio In / Output		Mono, 1.4 Vp-p, 50 KΩ, Terminal connector	
IP Rating		IP66	
Window		Ø78 Heat Resistant Glass	
Infrared LED	Peak Wavelength	850nm	
	Beam Spread	30°	
	Radiant Distance	55M	
Operating Temperature		-40°C – +50°C (-40°F – 122°F)	
Dimension		Body : 124mm(W) x 113mm(H) x 310mm(D) , Bracket : 211.5mm(L)	
Weight		2200g	
Power Supply		AC24V (±10%)	
		AC100 – 240V (±10%)	
		PoE+ (IEEE 802.3at compliant)	
Power Consumption		17W (PoE+, 20W)	

NETWORK		
Video Compression		H.264 , Motion JPEG
Resolution		1080P(1920 x 1080), 720P(1280 x 720), D1(720 x 480), CIF(352 x 240)
Multiple profile	Profile #1	H.264 : up to 30 fps @ 1920 x 1080 , MJPEG : up to 30 fps @ 720 x 480
	Profile #2	H.264 : up to 30 fps @ 1280 x 720 , MJPEG : up to 30 fps @ 352 x 240
	Profile #3	H.264 : up to 30 fps @ 1920 x 1080 , MJPEG : up to 30 fps @ 1280 x 720
	Profile #4	H.264 : up to 30 fps @ 720 x 480 , MJPEG : up to 15 fps @ 1920 x 1080
Video Streaming		RTP/HTTP, RTP/TCP, RTP/UDP, Multicast 128Kbps – 5Mbps
Video Bitrate		Frame rate and bit rate controllable on-the-fly VBR / CBR / GOP supported
Security		Base64 HTTP encryption Multiple user access levels with password protection
Users		10 user accounts available
ePTZ & Digital Zoom		8 simultaneous users
OSD		Yes, ROI is supported
Alarm Function		Text overlay for date, time, and camera name Alarm / motion / tampering / face detection triggering recording into SD card Image upload over FTP and E-mail by face / tampering / audio / motion detection
CPU, Memory		Embedded SoC ARM11, 528MHz, 256MB DDR2, 256MB flash memory
Maintenance		Firmware update via HTTP Firmware available at web site
Network Interface		10Mbps / 100Mbps Base-T, RJ-45
PC Requirement		OS : Windows 2000, Windows XP, Windows Vista, Windows 7
		Browser : Windows Internet Explore 6, 7, 8
		CPU : Intel Pentium 4 1.8GHz or above
Network Protocols		RAM : 1GB or above, Independent Display Card IP, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTP, Telnet, ICMP, IGMP, ONVIF
Mobile phone		iPhone, iPad, and Android support
System Integration		ONVIF & LILIN HTTP API
CMX		CMX HD 3.6 support
Video Display		LILIN Universal ActiveX & LILIN Java Applet
OS		Embedded Linux 2.6.32
Two-way Audio		G.711 / PCM
SD Card Recording		Support SD/SDHC card for circular recording (card is not included)
Alarm Input / Output		Digital 1 input (TTL, +3 – 5V) / 1 Output (N.O.)