

# ME4 Box Camera

4MP camera with High Dynamic Range (HDR), auto backfocus, and choice of P-Iris lenses




Shown with wide to medium-range varifocal lens



Shown with optional environmental housing



For customers who prefer the flexibility of a box camera and need to monitor activity in a variety of lighting conditions, the **ME4 Box Camera** delivers HDR, True Day/Night, and 4MP resolution to guarantee superior image quality, regardless of lighting. In addition, the camera's vandal-resistant environmental housing enables customers to extend surveillance coverage to the outdoors in conditions as low as -40°F (40°C).

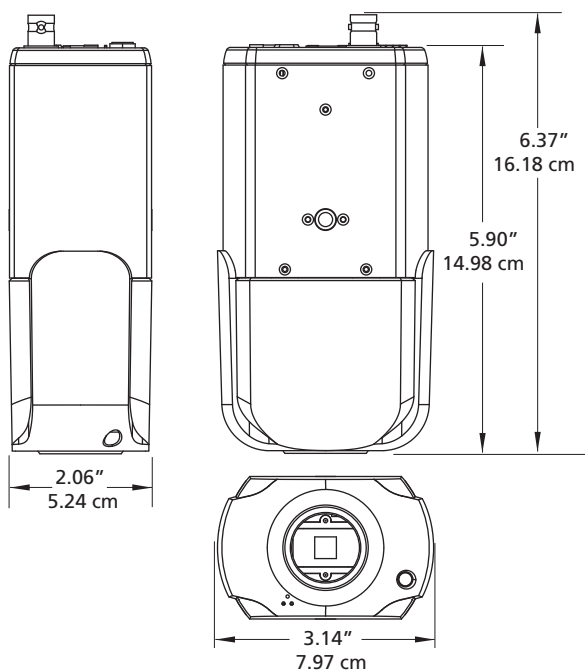

## Key Benefits

- ▼ **4MP resolution.** Twice the amount of pixels as 1080p, 4MP delivers the perfect amount of detail to see facial features, bill dominations, etc.
- ▼ **High Dynamic Range (HDR).** The camera blends the best parts of several separate exposures together to combine the most focused, well-lit, and colorful parts of the scene.
- ▼ **Auto backfocus.** Once the field-of-view has been adjusted manually, the backfocus can be fine-tuned remotely.
- ▼ **P-Iris.** The enhanced video clarity and depth of field offered by the P-Iris allows objects close to and far away from the camera to remain in focus, simultaneously.
- ▼ **True Day/Night.** When the light level drops lower than a particular threshold (defined by the user), the camera's IR cut filter is removed and it automatically switches to B/W, allowing it to see details at very low light levels.
- ▼ **Choose an optional ME4 certified P-Iris lens for maximum performance.** Available in 2.8-8mm and 8.5-50mm packages.
- ▼ **Widescreen monitor display.** The video is displayed in a 16:9 aspect ratio on the monitor, which makes use of the full monitor.

*Select your lens of preference to get the perfect field of view and detail for your application.*

# ME4 Box Camera

CAMERA	
<b>Image Sensor</b>	1/3" Progressive Scan CMOS
<b>Effective Pixels</b>	4MP; 2688 (H) x 1520 (V)
<b>Lens</b>	33160-102: 4MP, 2.8-8mm, F1.2 (wide) or F1.95 (tele), P-iris, varifocal, CS mount 33160-103: 4MP, 8.5-50mm, F1.6, P-iris, varifocal, CS mount
<b>Field of View</b>	33160-102: 103° (Wide); 39° (Tele) 33160-103: 35° (Wide); 7° (Tele)
<b>High Dynamic Range (HDR)</b>	120dB
<b>Day/Night Functionality</b>	Automatically removable IR cut filter
<b>Minimum Illumination</b>	Color: 0.1 lux; B/W: 0.01 lux
<b>Shutter Speed</b>	1/10000s
<b>Pat/Tilt/Zoom</b>	RS485 Optical Zoom, Digital PTZ via Command
<b>White Balance</b>	Manual/Automatic

VIDEO	
<b>Video Compression</b>	H.264, M-JPEG
<b>Resolution</b>	4MP (2688 x 1520), 3MP, Full HD 1080p, SXGA, 720p, XGA, SVGA, D1, VGA, CIF
<b>Frame Rate</b>	Up to 25/30fps @ 4MP (2688 x 1520)
<b>Video Streaming</b>	
<b>Dual</b>	H.264 4MP (2688 x 1512) @25/30fps + H.264 D1 @ 25/30fps (one of the streams ≤2MP can be set as M-JPEG)
<b>Quad</b>	H.264 4MP (2688 x 1512) @25/30fps + H.264 SVGA @ 15fps + H.264 CIF @ 15fps + H.264 CIF @ 15fps
<b>Image Settings</b>	Iris control, backlight compensation, white balance, noise reduction, wide dynamic range, privacy mask, brightness, exposure, sharpness, contrast, saturation, hue, IR configuration, day/night threshold

AUDIO	
<b>Audio Streaming</b>	Two-way
<b>Audio Compression</b>	G.711 PCM
<b>Audio Input/Output</b>	Line in/line out

NETWORK	
<b>Security</b>	Password protection, HTTPS encryption (configuration only), IEEE 802.1X
<b>Supported Protocols</b>	IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, DHCP, PPPoE, UPnP, QoS, ONVIF-S
<b>Interface</b>	RJ-45, 10/100Mbps Ethernet
<b>Internet Browser</b>	Internet Explorer (10+)

SYSTEM INTEGRATION	
<b>Alarms</b>	Two alarm inputs, one relay output
<b>Intelligent Video</b>	Video motion detection, active video tampering, privacy zones
<b>Alarm Trigger</b>	Motion detection, video tampering, external input
<b>Alarm Events</b>	Video recording to local storage (microSDXC, 64GB support), external output activation

GENERAL	
<b>Lens Mount</b>	CS Mount
<b>Power</b>	PoE (802.3 af, Class 0); 12VDC/24VAC
<b>Power Consumption</b>	3.64W typical SD Card: +0.6W
<b>LED Indicator</b>	Power, Link, ACT
<b>Connectors</b>	Auto Iris: P-Iris Alarm: Terminal Block Power: Terminal Block Ethernet: RJ-45 Analog Video: BNC Audio: Phone jack RS-485: Terminal block
<b>Local Storage</b>	microSDXC memory card up to 64GB (sold separately)
<b>Operating Conditions</b>	No Housing: -22° to 131°F (-30° to 55°C); 10-90% RH, non-condensing With Environmental Housing: -40° to 131°F (-40° to 55°C); 10-90% RH, non-condensing
<b>Weatherproof Standard</b>	IP66 (with Environmental Housing)
<b>Weight</b>	0.73 lb (0.33 Kg)
<b>Dimensions</b>	6.4 L x 3.1 W x 2.1 H in (16.2 L x 8.0 W x 5.2 H cm)
<b>Certification Model</b>	C2501A
<b>Regulatory Approvals</b>	Emissions: EN 55022: FCC Part 15 Subpart B, ICES-003, CISPR 22, AS/NZS CISPR 22 Immunity: EN 50130-4 Safety: UL60950-1, IEC60950-1 (CB report) Environmental: ROHS2, WEEE
<b>Included Accessories</b>	Software CD (including Installation Guide, Configuration Guide, and browser); Quick Start Guide; mounting template; mounting hardware

ORDERING INFORMATION	
<b>CAMERA</b>	
33168-101	ME4 Box Camera, no lens
33168-102	ME4 Box Camera with 2.8-8mm lens
33168-103	ME4 Box Camera with 8.5-50mm lens
<b>ACCESSORIES</b>	
HOWSCAMWB	Indoor Wall/Ceiling Mount
26481	Environmental Housing
26485	Wall Mount for Environmental Housing
26486	Ceiling Mount for Environmental Housing
26480	115/220VAC Power Supply for Environmental Housing