




SDS712M Series Color Camera
High speed PTZ DSP dome camera

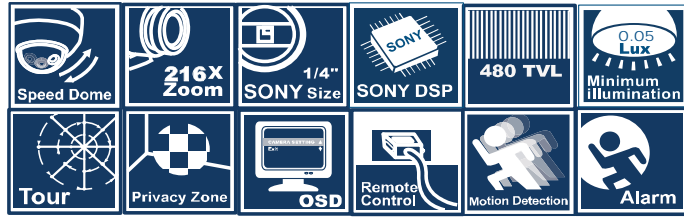

	NTSC	PAL
Image system		
Lens		
Image Sensor	1/4" SONY SuperHAD CCD	
Optical zoom	F1.4 ~ F3.0	
Focal length	f=4.1~73.8mm	
View Angle	2.8°~48.0°	
Effective pixels(HxV)	380K pixels approx.	440K pixels approx.
Scanning system	2:1 Interlace V: 59.94Hz, H: 15.734KHz	2:1 Interlace, V: 50Hz, H: 15.625KHz
Sync system	Internal / line-lock	
Video output	1Vpp composite output, 75 ohm	
Horizontal resolution	480 TVL	
S/N ratio	More than 50 dB	
Zoom limit	UP TO 216X (optical 18X, digital 12X)	
Focusing system	Auto(normal sensitivity / low sensitivity)	
Focus	Auto (sensitivity: normal, low), One-push AF, Manual, Infinity, Interval AF, Zoom Trigger AF	
Minimum illumination	Normal mode: 0.05 lux (F1.4, 1/60(1/50)sec, 10 IRE)	
Gain control	Auto	
White balance	Auto, ATW, One-push	
Electric shutter	1/50 to 1/10,000sec, 16 Steps	
Auto slow shutter	On / Off	
AE control	Auto / manual / backlight compensation	
EV compensation	-10.5~+10.5dB(15 steps)	
Backlight Compensation	On / off	
Alarm function	Yes	
Day/Night mode	-	
Flickerless	Yes	
Motion detection	Yes	
Picture Effect		
Mechanical Flip E-FLIP	-	
Mirror Image	Yes	
Freeze Image	-	
P/T Operation		
Pan Range	360° continuous	
Manual Pan speed	0.1 - 90°/s	
Manual Pan speed (turbo)	0.1°/s: max dig. zoom ; 0.4°/s :max opt. zoom	
Manual tilt speed	150°/sec	
Preset speed	0.1 - 45°/s	
Proportional P/T	0.1°/s: max dig. zoom ; 0.4°/s :max opt. Zoom	
Pan/Tilt limit	Pan: 430°/sec(max); Tilt: 200°/sec (max)	
Auto Flip	Provided	
Zoom Limit	user definable	
Programmable Preset	on/off	
Programmable Tours	x18,x36,x72,x144,x216, 256 points	
Privacy zone	4 pattern tours memorizing up to 6 mins of manual control	
Scan function	On / off, up to 24 zones (3D Privacy Zone)	
Alarm	Random, frame and auto-scan selectable	
Preset titles	6 inputs / 1 output	
Password protection	Max 20 characters	
Other Superior Functions	alphanumeric Dome OSD setup protection	
Remote control	Super Fine Pan for 0.02° Accuracy / Motion Detection / Scheduling	
Remote control	MESSOA P/D (Also support Pelco-P/D, GE-Kalatal, Bosch, Ernitec, Tyco)	
Special Commands	support absolute(X, Y, Z) position	
Interface	RS485 (2-wire)	
Baud Rate	2400,4800,9600,19200 bit/s(DIP-sw selectable)	
Mechanical/Environment		
Operating temperature	-10 °C ~ 50 °C (14°F~122°F)	
Operating humidity	20% ~ 80% RH	
Storage temperature	-20 °C ~ 60 °C (-4°F~140°F)	
Dimensions(øxH)	ø250mm X 257mm (ø9.8" X 10.1")	
Weight	Approx. 3500g (7.7 lb)	
Electrical		
Power requirement	AC24V +/-10%	
Power consumption	18W (max.)	
OSD		
Multi language support	English, Simplified Chinese, Traditional Chinese, Spanish, Portuguese, French, Japanese, German, Polish, Italian	
Regulation		
Vandal proof	N/A	
Water proof	N/A	
Other	Without Heater and Blower	
Applications	In-ceiling mount	
Ordering information	SDS712M-HN2-US (US Power Cord)	SDS712M-HP2-EU (EU Power Cord)
		SDS712M-HP2-UK (UK Power Cord)

Version 2008.09.25

Secure in Knowledge
 www.messoa.com

MESSOA USA e-mail: info.us@messoa.com
 MESSOA Taiwan e-mail: info@messoa.com
 MESSOA China e-mail: info.china@messoa.com