




32" LCD MONITOR

LDT323V

- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- WXGA 1366 X 768 NATIVE RESOLUTION
- REDUCES POWER CONSUMPTION BY 40%
- MULTIPLE SCREEN SAVER FUNCTION
- PROGRAMMABLE SCHEDULING

LEADING THE EVOLUTION OF
HIGH-DEFINITION
DIGITAL SIGNAGE

32" LCD MONITOR LDT323V

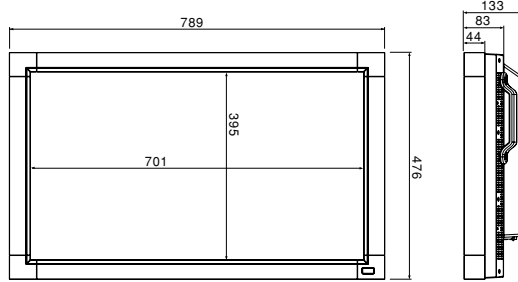

Optional Stand:
ST-322V




Optional Speakers:
SP-321V

MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

- ❶ Power in (3-pin with earth terminal)
- ❷ External speaker terminals
- ❸ Audio in
- ❹ Audio out (RCA)
- ❺ Video I/O (BNC/S-terminal)
- ❻ S-Video in (mini DIN 4-pin)
- ❼ Video in (BNC)
- ❽ Video out (BNC)
- ❾ RS-232C (D-sub 9-pin)
- ❿ RGB 1 in (HDMI)
- ⓫ RGB out (mini D-sub 15-pin)
- ⓬ RGB 2 in (DVI-D)
- ⓭ RGB 3 in (mini D-sub 15-pin)
- ⓮ RGB 4 in, DVD/HD in (BNC)

Rear Connector Panel

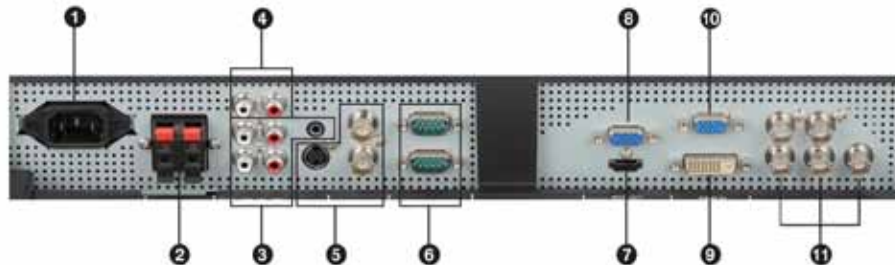

CLASS	32" (Diagonal) LCD Monitor
VIEWABLE IMAGE SIZE	27.5" x 15.4"
ORIENTATION	Landscape / Portrait
BRIGHTNESS/LUMENS	450 cd/m ²
PIXEL PITCH	0.511 mm
CONTRAST RATIO	3000:1
DIMENSIONS (W x H x D in.)	31.1" x 18.8" x 5.2" (without stand)
WEIGHT (WITHOUT STAND AND SPEAKERS)	32 lbs. (Net)
BEZEL WIDTH	1.8"
RESPONSE TIME	6.5 ms (gray to gray)
VIEWING ANGLE	Horizontal and vertical: 178°
VIDEO/AUDIO INPUTS AND OUTPUTS	mini D-Sub 15 pin In/Out, HDMI, DVI-D, BNC (R,G,B,H,V), S-Video, Composite (BNC, RCA), Component (BNC), Audio LR (RCA), Audio Stereo mini jack
SPEAKER OUTPUT	External speaker jack
CONTROL INPUT/OUTPUT	RS232C (mini D-Sub 9 In/Out)
POWER CONSUMPTION (WITHOUT SPEAKERS)	85 W
ESTIMATED BACKLIGHT LIFE	Up to 50,000 hours*
AUDIO SPEAKER	Optional: SP-321V
TABLE STAND	Optional: ST-322V
WALL MOUNT COMPATIBILITY	Optional: CTM-VESA
WARRANTY	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

*Results may vary depending on usage and operating environment