

# 3000 Series DVR

Simple, rugged, compact mobile DVR with big-system functionality



## OVERVIEW

The MobileView® 3000 Series Digital Video Recorder is the latest addition to the MobileView line of high-quality, onboard digital video recording systems. Designed for transit vehicles requiring twelve cameras or less, this small, easy-to-use DVR includes standard features that are normally found only in more complex systems: up to 240 fps across all channels, picture resolutions up to 4CIF (704x480), dual-stream recording for low-bandwidth video playback, integrated 802.11a/b/g/n wireless and 12 digital inputs.

The MobileView 3000 Series DVR is designed with installation efficiency in mind. Quick connect wire harnesses with standardized connectors streamline installation. A Web browser interface simplifies configuration without the use of additional software. The removable media caddy allows the user to swap caddies for remote video viewing and retrieval through a docking station providing flexibility when not used with a wireless infrastructure.

Loaded with advanced and flexible features, the MobileView 3000 Series DVR is a highly-capable mobile video and audio recording device. It uses the latest H.264 video compression methods, a tamper-evident digital watermark, and advanced audio capture techniques to ensure that recorded data is an accurate reproduction of real-time events.

## STANDARD FEATURES

- 4, 8 or 12 channel models
- 120/240 fps (240/480 ips)
- H.264 encoding
- Dual video streams with independent settings
- 1 or 2 TB interchangeable, locking media caddy
- Resolution configurable by channel (QCIF, CIF, 2CIF, 4CIF)
- Up to 12 audio channels (model dependent)
- 12 Digital inputs
- 2 Relay outputs
- Integrated 802.11a/b/g/n wireless client
- 6 Status LED's on front of DVR
- General event processor
- Standardized wiring harness
- Web browser-based programming and configuration
- J1455 compliant for shock and vibration
- J1939 compatible with external module
- GPS option
- Programmable MUX output
- Front and rear ethernet ports

# 3000 Series DVR

Simple, rugged, compact mobile DVR  
with big-system functionality

## Specifications

### Video Surveillance

Linux OS	Stable OS Platform, increased compatibility with peripheral devices
Camera Channels	4, 8 or 12 channel models (NTSC/PAL Selectable)
Camera Frame Rate	120/240 frames (240/480 images) per second, max.
Video Streams	Dual streams per channel (Main & Alternate)
Recording Resolution	<b>Main:</b> QCIF, CIF, 2CIF, 4CIF, <b>Alternate:</b> QCIF and CIF
Compression Levels	H.264 compression methods. Configurable individually per input
Video Outputs	1 Multiplex (1UP, 4UP, 6UP*, 8UP*) *6 & 8 on 8/12CH only
Audio Inputs	2 Main plus per channel audio support up to 12 channels
Audio Outputs	1 Mono
Ethernet Ports	Two, 10/100 Mbps
Geo-Location	Enabled by GPS accessory module
Clock & Synchronization	Automatic via GPS or Network time server
Storage Solution	Interchangeable media caddy, (1TB minimum capacity)
Video Download	Download using remote software client or web server
Field Upgrade	Upgrade using remote software client or web server

### Monitored Inputs & Outputs

Digital Inputs	Twelve programmable for Open or Closed operation
Digital Outputs	Two for system status monitoring
Relay Outputs	Two Form C, Dry Contact
Delayed Startup	0-120 seconds
Delayed Shutdown	0-99 Minutes

### Networking & Communications

Standard Protocols	DHCP, NTP, IPv4
Wireless	802.11a/b/g/n Wireless Client
Wireless Security	WEP, WPA 1 & 2 Personal Mode, AES
Serial Interfaces	RS232, RS45

### Electrical & Environmental

Input Power	Vehicle based 12V or 24V DC Nominal (9-32V DC)
Power Consumption	75 Watt Operating, 5W Standby
Output Power	12VDC, 4 Amp Max Load
Operating Shock	Tested per SAE-J1455 section 4.11.3.4
Operating Vibration	Tested per SAE-J1455 section 4.10.4.2

### Ambient Specifications

Operation Temperature	14°F to 122°F (-10°C to 50 °C)
Storage Temperature	-4°F to 158°F (-20°C to 70 °C)

### Mechanical

Unit Dimensions (L x D x H)	14.75 x 10.5 x 4.0 in. without rear panel shield 14.75 x 13.25 x 4.0 in. with rear panel shield
Caddy Removal	8" space in front of DVR
IP Rating	IP43 with wire shield
Unit Weight	13 lbs.

### Regulatory

FCC	Part 15, Class A
-----	------------------

## Ordering Information

### Digital Video Recorder Kits

<b>MVH-4350-04-K1</b>	MobileView® 3004 4 CH DVR with Mounting Plates, J1-J8 Harnesses and Harness Connection Kit (without HDD Kit)
<b>MVH-4350-08-K1</b>	MobileView 3008 8 CH DVR with Mounting Plates, J1-J8 Harnesses and Harness Connection Kit (without HDD Kit)
<b>MVH-4350-12-K1</b>	MobileView 3012 12 CH DVR with Mounting Plates, J1-J8 Harnesses and Harness Connection Kit (without HDD Kit)
<b>MVH-1002-K3-10</b>	MobileView 3000, 1TB Flex Drive Kit (Caddy and 1TB 3.5 inch SATA HDD)
<b>MVH-1002-K3-20</b>	MobileView 3000, 2TB Flex Drive Kit (Caddy and 2TB 3.5 inch SATA HDD)

### DVR Accessories

<b>MVH-4004-00-00</b>	Docking Station with 2 Keys
<b>MVH-3301-M0-04</b>	GPS Module and Antenna, 15' Cable
<b>MVH-7100-00-08</b>	Acceleration and Impact Sensor


### DVR Components

<b>MVH-4350-04-01</b>	MobileView 3004 4 CH, DVR Only
<b>MVH-4350-08-01</b>	MobileView 3008 8 CH, DVR Only
<b>MVH-4350-12-01</b>	MobileView 3012 12 CH, DVR Only
<b>MVH-4002A300</b>	Rear Panel Shield
<b>MVH-4002A304</b>	Replacement Vibration Mounts (New Rubber and Brackets), 1 Pair
<b>MVH-4002A310</b>	Mounting Plate with Vibration Mounts (Includes MVH-4002A304)
<b>MVH-1002-01-00</b>	Flex Drive Caddy, 2 Keys, without HDD
<b>MVH-1001-03-10</b>	SATA HDD, 1TB, 3.5 inch, without Caddy
<b>MVH-1002-03-20</b>	SATA HDD, 2TB, 3.5 inch, without Caddy
<b>MVH-1002-KY-00</b>	Key Set (2 each) for DVR Door and HDD Caddy

### DVR Cable Harness

<b>MVH-4039-00-00</b>	Harness Connection Kit
<b>MVH-4037-J1-00</b>	Power Harness
<b>MVH-4037-J2-00E</b>	Audio, Status, Accel., J6-12E Harness
<b>MVH-4037-J3-00</b>	Digital Input Harness
<b>MVH-4037-J5-00</b>	Relay Output Harness
<b>MVH-4037-J6-04A</b>	4 CH Video-Audio Input, Power Harness
<b>MVH-4037-J6-08A</b>	8 CH Video-Audio Input, Power Harness
<b>MVH-4037-J6-12EA</b>	12 CH Video-Audio Input, Power Ext. Harness
<b>MVH-4037-J7-00</b>	Audio Output Harness, 15 in. Cable

## Dimensional Diagrams

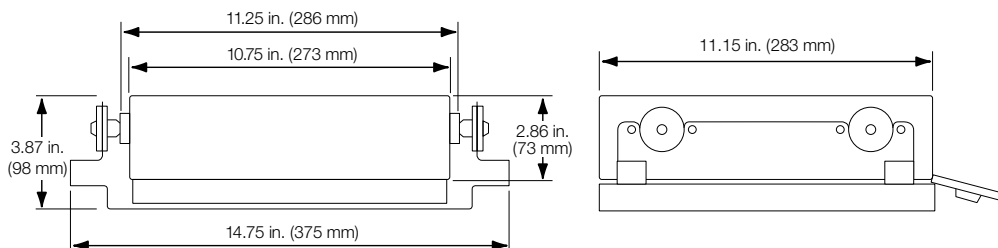

[interlogix.com/mobileview](http://interlogix.com/mobileview)

Specifications subject to change without notice.

All rights reserved.

© 2014 United Technologies Corporation.

401-3782 2014/05 (78629)