



*Quality video over ordinary telephone wire...<sup>®</sup>*

## Model NV-212A Video Transceiver



### Features:

- ▶ Full-Motion monochrome or color video at distances up to 500ft (150m)
- ▶ Supports "up-the-coax" type control signals
- ▶ No power required
- ▶ Exceptional interference rejection
- ▶ Compatible with qualified UTP cameras
- ▶ Up to 10 NV-212As may be rack mounted using the NV-RM8/10 Rack Panel Kit
- ▶ Limited lifetime warranty

The NVT Model NV-212A Video Transceiver is a passive (non-amplified) device that allows intra-building transmission of real-time monochrome or color video over Unshielded Twisted-Pair (UTP) telephone wire. Baseband (composite) signals of any type are supported at distances up to 500ft (150m).

Up-the-coax type signal may be sent over the same wire pair. Used as a receiver, the NV-212A is fully compatible with qualified cameras that are equipped with an NVT twisted-pair output.

The unparalleled interference rejection and low emissions of the Model NV-212A allow video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of a shared or existing cable plant.

Network Video Technologies, Inc.  
1755 E. Bayshore Road, Suite 8B • Redwood City, CA • 94063 • USA  
(+1) 650.562.0600 • 800.959.9870 • FAX (+1) 650.365.9575  
email:info@nvt.com • <http://www.nvt.com> • Internet Keyword: NVT

**NV-212A**



Quality video over ordinary telephone wire...®

# Model NV-212A Video Transceiver

## Technical Specifications

### Video

Frequency response	DC to 5 MHz
Attenuation	1.5 dB max
Common-mode / Differential-mode rejection	
15 KHz to 5 MHz	60 dB typ
Impedance	
Coax, female BNC	75 ohms
UTP, Terminal Block	100 ohms

### Power

No external power required

### Environmental

Temperature	-20 to +75°C
Humidity (non-condensing)	0 to 95%
ESD Susceptibility (200 pF probe)	20 KV

### Wire Type


Network Wiring	One Unshielded Twisted Pair 24 AWG (0,5 mm) or thicker
Category Type	2 or better
Impedance	100 ± 20 ohms
DC Loop Resistance	52 ohms per 1,000 ft (18 ohms per 100 m)
Differential Capacitance	19 pF/ft max (62 pF/m max)
Wire Length	See chart below

### Mechanical

Dimensions, excluding connectors	3.00 x 1.54 x 1.10in (76 x 39 x 28mm)
Weight	4.0 oz (100 g)
Material	Black ABS
Mounting	Two 0.175 in (4,4mm) diameter holes 2.5in (63,5mm) apart

Up to ten NV-212As can be mounted  
to an NV-RM 8/10 Rackmount Panel

Specifications subject to change without notice.

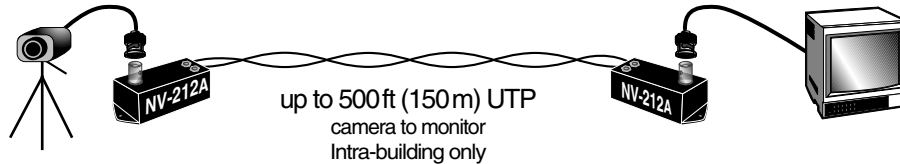

## Product Selection Chart

Distance	Transmitter Model	Ext. Power Required	Receiver Model	Ext. Power Required	Ground Lifting	Transient Protection	P/T/Z Control
0 to 500ft (0 to 150m)	NV-212A Video Transceiver .....No or Qualified OEM Camera	No	NV-212A Video Transceiver .....No	No	No	No, not for inter-building use	Yes
0 to 1,000ft (0 to 300m)	NV-213A/A-M Video Transceiver.....No or NV-813A 8-Port Passive Hub .....No or NV-1613A 16-Port Passive Hub ....No. or Qualified OEM Camera	No	NV-213A Video Transceiver .....No or NV-813A 8-Port Passive Hub .....No or NV-1613A 16-Port Passive Hub .....No	No	No	Built-in	Yes
0 to 3,000ft (0 to 1km)	NV-213/A-M Video Transceiver.....No or NV-813A 8-Port Passive Hub .....No or NV-1613A 16-Port Passive Hub ....No or Qualified OEM Camera	No	NV-652R Video Receiver .....12-24V AC/DC or NV-862R 8-Port Active Rcvr. Hub .....Xformer Incl. or NV-1662R 16-Port Active Rcvr. Hub ...Xformer Incl.	12-24V AC/DC	Yes	Built-in	No, Use RS-422
Cat. 2 or 3 0 to 1 mile 0 to 5,280ft (0 to 1,6 km) or Cat. 5 0 to 1.5 miles 0 to 8,000ft (0 to 2,4 km)	NV-653T Video Transmitter ...24V AC/DC	No	NV-652R Video Receiver .....12-24V AC/DC or NV-862R 8-Port Active Rcvr. Hub .....Xformer Incl. or NV-1662R 16-Port Active Rcvr. Hub ...Xformer Incl.	12-24V AC/DC	Yes	Built-in	No, Use RS-422

Network Video Technologies, Inc.  
1755 E. Bayshore Road, Suite 8B • Redwood City, CA • 94063 • USA  
(+1) 650.562.0600 • 800.959.9870 • FAX (+1) 650.365.9575  
email:info@nvt.com • http://www.nvt.com • Internet Keyword: NVT

Copyright © 2000 NVT, Inc.

411-212-1-F

**NV-212A**