



## Model NV-216A-PV Video Transceiver



### Features:

- Power-Video (PV) signals are routed via UTP and RJ45
- Use with NVT's PVD™ Power Supply Hubs and Cable Integrators
- Up to 3,000ft (1km) with a NVT DigitalEQ™ hub or active receiver, (see Power Distance Chart)
- Up to 1,500ft (460m) with a NVT StubEQ™ hub
- Supports “up-the-coax” type control signal up to 750ft (225m)
- Exceptional interference rejection
- Built-in transient protection
- Limited lifetime warranty

The NVT Model NV-216A-PV Video Transceiver with Power is a passive (non-amplified) device that allows the transmission of real-time monochrome or color video over Unshielded Twisted-Pair (UTP) telephone wire. Baseband (composite) signals of any type are supported.

The NVT Model NV-216A-PV video transceiver allows transmission of CCTV video and low voltage power over UTP cable. The NV-216A-PV incorporates the transceiver engine of NVT's popular NV-214A-M video transceiver with the added value of camera power connections. Power and Video are routed via UTP and RJ45 connections. Used at the camera, the passive NV-216A-PV has a compact body, a male BNC for direct connection to the camera, and is compatible with NVT's PVD™ product line. Connect the RJ45 to 4-pair cable to be routed to the NVT cable integrator and on to an active or passive receiver hub in the MDF/Control Room.

The unparalleled interference rejection and low emissions of the NV-216A-PV allows video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of a shared or existing cable plant. The NV-216A-PV carries a limited lifetime warranty are UL and cUL listed and CE, WEEE and RoHS compliant.

### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940  
nvt.com • info@nvt.com



# Model NV-216A-PV

## Video Transceiver

### Technical Specifications

#### WIRE DISTANCE (Power Distance Chart)

Supply voltage, wire resistance and minimum camera operating voltage determine the maximum camera distance. Examples assume a minimum 21VAC at the camera:

Fixed 24VAC Camera	NV-216A-PV	
Power Supply Voltage	24 VAC	28 VAC
Minimum Voltage at Camera	21 VAC	21 VAC
<b>B&amp;W Camera 100 mA, 2.4 W</b>		
2-pair 24 AWG	899ft (274m)	2,098ft (640m)
2-pair 23 AWG (Cat6)	1,134ft (346m)	2,645ft (807m)
<b>Color Camera 200 mA, 4.8 W</b>		
2-pair 24 AWG	450ft (137m)	1,049ft (320m)
2-pair 23 AWG (Cat6)	567ft (173m)	1,323ft (403m)
<b>Color Camera 300 mA, 7.2 W</b>		
2-pair 24 AWG	300ft (91m)	699ft (213m)
2-pair 23 AWG (Cat6)	378ft (115m)	862ft (269m)


Fixed 12VDC Camera	NV-216A-PV	
Power Supply Voltage	12 VDC	
Minimum Voltage at Camera	11.5 VDC	
<b>B&amp;W Camera 200 mA, 2.4 W</b>		
2-pair 24 AWG	75ft (23m)	
2-pair 23 AWG (Cat6)	94ft (29m)	
<b>Color Camera 400 mA, 4.8 W</b>		
2-pair 24 AWG	37ft (11m)	
2-pair 23 AWG (Cat6)	47ft (14m)	
<b>Color Camera 600 mA, 7.2 W</b>		
2-pair 24 AWG	25ft (8m)	
2-pair 23 AWG (Cat6)	31ft (10m)	

**Notes:** Wire should be Cat5 or better/ low voltage camera power, video and RS-422 or RS-485 data may reside within the same wire bundle, however do not run 24 or 28VAC within the same wire bundle as other telecom or datacom signals.

#### VIDEO

Frequency response	DC to 5 MHz
Attenuation	0.5 dB typ
Common-mode / Differential-mode rejection	
50 KHz to 5 MHz	60 dB typ
Impedance	
Coax, male BNC	75 ohms
UTP, RJ45 data connector	100 ohms

#### RJ45 PINOUTS



#### WIRE TYPE

Network Wiring	One unshielded twisted pair 22-24 AWG (0.5-0.64mm) 2 or better
Category type	100 ± 20 ohms
Impedance	52 ohms per 1,000ft (18 ohms per 100m)
DC loop resistance	19 pF/ft max (62 pF/m max)
Differential capacitance	

#### ENVIRONMENTAL

Temperature	-22 to +167 °F (-30 to +75°C)
Humidity (non-condensing)	0 to 95%
Transient immunity	per ANSI / IEEE 587 C62.41

#### MECHANICAL


Body Length	1.6in (40,6mm)
Body Depth	0.88in (22mm)
Body Height (not including BNC)	.81in (20,5mm)
Weight	1.0oz (30g)

#### REGULATORY



Specifications subject to change without notice.

### Typical Application

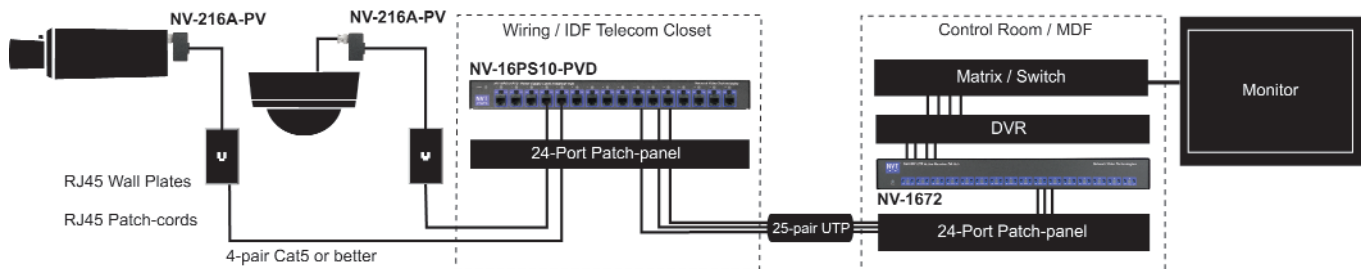

#### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
 (+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940  
 nvt.com • info@nvt.com

Copyright © 2008 NVT, Inc.  
411-216-1-D