

Evolution

360° Indoor Camera



Taking the next step in 360° total situational awareness

360° indoor IP camera with a 5MP sensor and no moving parts

- Constant 360° surveillance; no blind spots
- No moving parts; no maintenance; silent operation
- Up to 30fps @1MP and 1/4MP
- 0.2 lux minimum illumination; enhanced WDR
- PoE or 12VDC powered
- 3-years warranty

Advanced event management

- SD Card for local recording and advanced event management
- Up to 10 configurable privacy regions
- Up to 16 polygonal Video Motion Detection regions
- Local alarm digital input and output
- Audio microphone input


Whether wall or ceiling mount is required

- Quick and easy installation
- Professional light weight enclosure
- Pleasing aesthetics in either black or white finish
- Convenient surface-mounting enclosure
- Suitable for ceiling, wall or table mounted applications
- A range of mounting accessories allows for ceiling, wall, pole and pendant mounting



Extensive NVR/VMS platform integration; Full live and retrospective dewarping

- Market leading Oncam Grandeye 3D dewarping software
- Camera features are accessible via VMS platforms
- Simultaneous multiple video streams; with resolutions from 528x480 to 2144x1944
- 8x zoom capability through client-side dewarping
- H.264/MJPEG streaming with multiple quality levels
- Optimises bandwidth and storage utilisation
- Configurable password protection
- Intuitive web-based interface for viewing and configuration
- Supports major VMS / NVR / HDVR systems

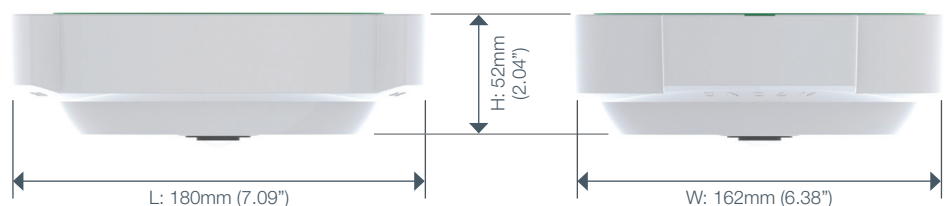

Evolution

360° Indoor Camera



Taking the next step in 360° total situational awareness

TECHNICAL SPECIFICATIONS

Model	EVO-05-NID (White enclosure)	EVO-05-NJD (Black enclosure)
General		
Field of View	360°	
Image Sensor	5 megapixel; Array Format (Active) 2592H x 1944V = 5,038,848 pixels; 1/2.5-Inch CMOS Sensor	
Angle of View	180° hemisphere	
Lens	185° 1.6mm / F2.0	
Minimum Illumination	0.2 lux = 50 IRE F/2.0 (6500K)	
Frame Rate	30fps typical for 1MP resolution and ¼MP resolution, 15fps typical for 2MP resolution and up to 10fps for 4MP full resolution	
Video Motion Detection	16 polygonal regions; configurable response; adjustable characteristics	
External Input	1x contact input	
External Output	1x contact output	
Security	Configurable password protection	
Advanced Event Management	Triggered by motion, external input or HTTP event, Result configurable; external output, FTP/SMTP upload, Local recording (with firmware 1.8.1)	
Networking	TCP/IP, HTTP, DHCP, DNS, NTP, FTP, SMTP, RSTP, uPNP	
Privacy Regions	10 configurable privacy regions	
SD Card	Built-in SD Card slot	
Audio Connections	Audio in; Microphone input via 3.5mm jack; via RTSP using G711 codec (µLaw - 8K sample rate), via ONVIF S	
Analogue Video Out	BNC connection – selectable between PAL or NTSC	
Signal-to-Noise Ratio	45dB	
White Balance Range	Auto White Balance (Range = approx. 2500K-8000K)	
Electrical		
Ports	RJ45 for 100Base-TX; 2.1mm DC Input jack; 6-pin 1.5mm Phoenix for external I/O, BNC for test video output	
Network Cable Type	CAT5 or better for 100Base-TX	
Power Input	12V, 1.0A (min) "LPS or NEC Class 2" power supply or Power over Ethernet (PoE), IEEE standard 802.3af	
Power Consumption	4.032W (PoE) / 3.144W (DC12V)	
Video		
Video Stream 1 & 2 Codec's	H.264 High, Level 5 / MJPEG (both streams configurable)	
Video Stream 1 & 2 Compression Level	Multi-levels of compression adjustment	
Video Stream 1 & 2 Pixel Resolution	Fisheyes at: ¼ MegaPixel (528x480), 1MP (1056x960) , 2MP (1488x1360), 4MP (2144x1944)	
Video Stream 3 Codec	MJPEG	
Video Stream 3	Multi-levels of compression and frame rate adjustment (max 15 fps)	
Video Stream 3 Pixel Resolution	Fisheye at: ¼ Megapixel (528x480)	
Image Control	Settings: brightness/contrast/saturation/exposure compensation; compression quality; wall/ceiling/table mount	
Image Enhancement	Electronic WDR 60dB	
PTZ Functionality	8x zoom with Oncam Grandeye 3D client-side dewarping software	
VMS / NVR / HDVR supported	Most major VMS / VMS / HDVR systems (contact Oncam Sales for latest list)	
Web Browser Compatibility	Internet Explorer IE9 (with ActiveX plug-in, supplied); Firefox 23 ; Chrome 29; using Quicktime, minimum version 7	
Number of Unicast Users Supported	Up to 20 simultaneous users depending on the resolutions settings	
Bit Rate Control	Selectable options: constant bit rate control; capped bit rate control; constant quality control	
Minimum system requirements		
Processor and Memory	Computer with 1Ghz 32-bit (x86) or 64-bit (x64) processor and with minimum of 512 MB	
Operating System	Windows Vista 32-bit with service pack 2 (SP2) of higher / 64-bit with service pack (SP2) of higher	
Hard Drive Space	Windows Vista 32-bit = minimum 70MB / Windows Vista 64-bit = minimum 120MB	
Display	Super VGA (800 x 600) of higher-resolution monitor with 256 colours	
Peripherals	100Mbps or greater network connection, mouse or compatible pointing device, keyboard	

Evolution

360° Indoor Camera



Taking the next step in 360° total situational awareness

Mechanical	
Camera Mount	Surface mount (or with a ranger of mounting accessories for mounting to a pole / wall / pendant)
Weight	0.58kg (1.08lbs)
Enclosure	Metal back plate with polycarbonate dome bubble and cover trim enclosure

Environmental	
Operating Temperature Range	-40 to +55°C (-40 to +131°F)
Storage temperature range	-40 to +70°C (-40 to +158°F)
Operating Humidity	Up to 98% (In accordance with BS EN 60068-2-30)
Ingress Protection rating	IP54-rated – Indoor use only

Certifications / Ratings / Patents	
Patents	15 patents; 15 patents pending; 20 licensed patents
Approvals	IEEE802.3af Class 2; EMC: (CISPR Class A) FCC; CE; ICES-003; KCC; SASO; GOST; S-MARK; C-TICK; UL and cUL-UL60950

Other Related Products	
Hardware/Software Solutions	Oncam Grandeye SDK integration pack, Evolution 5MP Camera Range, Evolution Accessories, IP Configuration Tool, 360-degree Viewer, OnVu360 Mobile Apps (iOS, Android)

Frame Rate, Resolution & Storage Needs					
H.264					
4MP *	2144 x 1944	10fps	Constant bit rate settings	5 Mbits/s	24hrs = 54GB **
2MP	1488 x 1360	15fps	Constant bit rate settings	3 Mbits/s	24hrs = 40GB **
1MP	1056 x 960	15fps	Constant bit rate settings	1.5 Mbits/s	24hrs = 16GB **
1/4MP	528 x 480	15fps	Constant bit rate settings	0.8 Mbits/s	24hrs = 8GB **
MJPEG					
4MP	2144 x 1944	10fps	Average file size: 640KB	Average bit rate: 52.4 Mbits/s	24hrs = 552.96GB **
2MP	1488 x 1360	15fps	Average file size: 350KB	Average bit rate: 43.0 Mbits/s	24hrs = 453.60GB **
1MP	1056 x 960	15fps	Average file size: 188KB	Average bit rate: 23.1 Mbits/s	24hrs = 243.65GB **
1/4MP	528 x 480	15fps	Average file size: 62KB	Average bit rate: 7.6 Mbits/s	24hrs = 80.35GB **

* Factory / Default settings

** Based on the same scene, with constant average light conditions

Evolution Accessories				
Image	Part	Product Code	Colour	Compatible With
	Indoor Pendant Mount	OBE-01-IWA OBE-01-IBA	White Black	Evolution Indoor Camera
	Pole Mount Bracket	OBE-03-OWA OBE-03-OBA	White Black	Evolution Indoor / Outdoor Camera (to be used with Pendant Mounts)
	Wall Mount Bracket	OBE-04-OWA OBE-04-OBA	White Black	Evolution Indoor / Outdoor Camera (to be used with Pendant Mounts)
	Corner Bracket	OBE-05-OWA OBE-05-OBA	White Black	Evolution Outdoor Camera (to be used with Outdoor Pendant Mount)

Ordering

EVO - 05 - NID

Series — EVO = Evolution Range

Camera — 05 = 5 Megapixel Sensor

Format — N = Standard (MJPEG/H.264)

Housing — I = Indoor (White)
J = Indoor (Black)

other available models:
M = Outdoor (White)
N = Outdoor (Black)
C = Concealed

Communications — D = RJ45 TCP/IP

Copyright 2014 by Oncam Global Group AG. Oncam Grandeye is the trade name of Oncam Global Group AG. All rights reserved. All screen images are simulated. Specifications and configurations subject to change without notice. Oncam Grandeye and IPZoom are trademarks of Oncam Global Group and its subsidiaries. The names of companies, entities, organizations and/or products/services mentioned herein may be the trademarks of their respective owners.

OG_2015.02.16_EU