

Oneprox™ Standard Reader

The Standard proximity reader offers reliability in an easy to install package and smart styling that blends easily with any decor.

Designed to be surface mounted or attached to a standard electrical back box, the reader provides a neat installation choice for both new and refitted buildings and is available in a black finish. It's built-in sounder can be programmed to issue a local alarm when a door is left open or forced.

In operation, the reader has one bi-colour LED (light emitting diode) that emits red or green light and which remains red when the reader is active. When it senses the presentation of a valid token or card the LED turns green to indicate that access has been granted.



Key Features:


- Up to 230mm (9 in.) reading range
- Reads KeyPAC (125KHz) and PAC (153KHz) technologies
- Fast and dependable read times
- Hidden mounting screws deter vandalism and improve aesthetics
- Fits standard MK™ backbox
- Five programmable output formats
- Easy installation with industry standard, low cost 6-core alarm cable
- Compatible with iPAC, EasiKey, EasiKey 1000, PAC 2200 series, PAC 202 and PAC 512 door controllers
- Sealed and rugged enclosure to withstand harsh environments
- Lifetime guarantee against electronic failure



Features & Specification

Description	Proximity reader to fit standard backbox
ID Technology	PAC Oneprox (works with PAC and KeyPAC)
Dimensions	H: 86mm (3.4") W: 86mm (3.4") D: 15mm (0.6")
Programmable Output Formats	Standard PAC (default), Weigand 26-bit, Weigand 34-bit ABA track 2, or barcode.
Weight	300g nominal
Maximum Read Range	Up to 90mm (3.5 in.)
Environment	IP66 - Indoor / Outdoor weather resistant
Maximum Current Requirements	< 100mA
Recommended Cable Type	6-core 24AWG alarm cable
Operating Temperature	-20° to + ° C
Operating Humidity	0 to 85% relative humidity non-condensing
Audiovisual Indication	Bi-colour LED (red-green) and audible sounder
Tamper Output	Yes (dependant on controller specification)
Material	IP66 - Indoor / Outdoor weather resistant
Certification	CE Mark, Fifteen EU Countries under the R&TTE Directive (EN60950 - ITE Electrical Safety, ETS EN 300 330 - SRD, and ETS EN 301 489 - EMC)

Oneprox™ Standard Reader

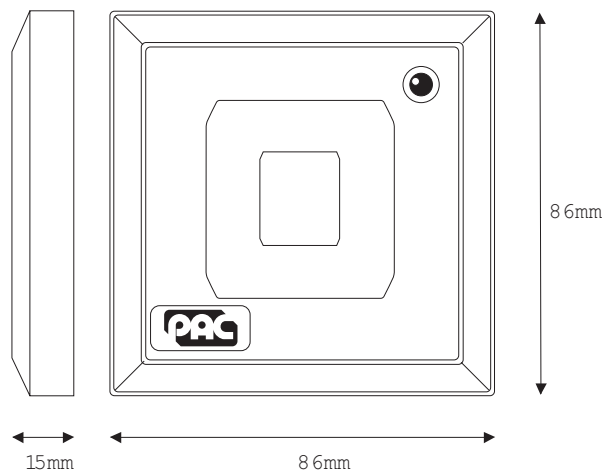

Ordering Information

20478	PAC Oneprox Standard Reader (black)
-------	-------------------------------------

ACCESSORIES

21020 PAC Token

- Black with PAC logo clip



20204 PAC Token

- Black without PAC logo clip


A range of coloured clips available




20250 KeyPAC Token



21039 PAC ISO Proximity Card x 10



21030 KeyPAC ISO Proximity Card



21087 Stanley Tokens

Black



21082



21084 Yellow



21086 Purple



21085 Orange



21083 Blue



21081 Red



STANLEY Security Products

PAC Access Control, 1 Park Gate Close, Bredbury, Stockport, Cheshire, SK6 2SZ
 Tel: +44 (0) 161 406 3400 Fax: +44 (0) 161 406 8984 Email: customerservices@stanleysecurityproducts.com
www.stanleysecurityproducts.com

Stanley Security Products is a sales channel of Stanley Security Solutions

Stanley Security Solutions Ltd. Registered in England and Wales No. 181585. Registered Office: Stanley House, Bramble Road, Swindon, Wiltshire SN2 8ER. VAT No. 232 2446 95

All reasonable care has been taken to ensure that the information contained in this publication is accurate as at the date of printing. Such information is nevertheless liable to variation in the event of changes occurring subsequent to the date of printing in the products, services or statements referred to in this publication.