

Ins-30014 PROXIMITY P series EM4100 Wiegand output

Suitability

Security sensitive doors



Wet environments



Mounted on metal surface




Readers mounted together

300mm
between readers

Fitting



Wire outputs

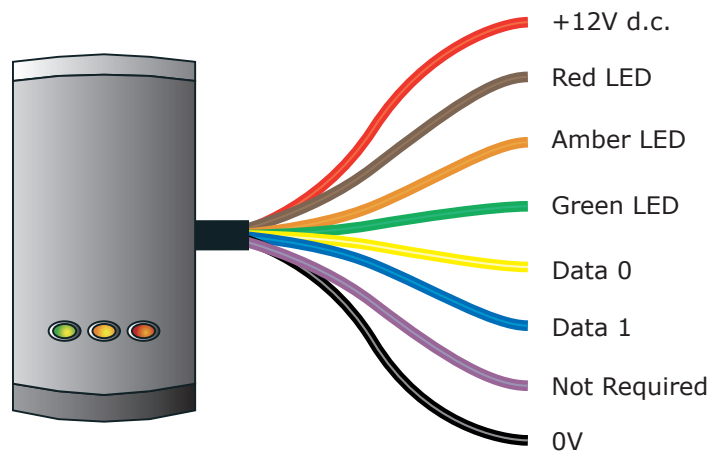

Specifications			
	Min	Max	
Environment			
Operating temperature	-20 °C	+55 °C	
Cable length			5 metres
IP Rating	IPX7		Outdoor Use
Electrical			
Voltage	8V DC	14V DC	
Current	50 mA	120 mA	
Carrier frequency			125 kHz
Wiegand format			26 bits
Dimensions			
	Width	Height	Depth
Reader	50mm	100mm	15mm

CE0168

Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of the Directive 1999/5/EC. This equipment is intended for use in all the EU and EFTA countries and all other countries worldwide. The declaration of conformity may be consulted at - <http://paxton.info/596>

Cable extensions

Readers can be extended using Beldon CR9540 10-core overall screened cable. The maximum cable length between reader and controller is 100 metres.

Ins-30014 PROXIMITY P series EM4100 Wiegand output

Suitability

Security sensitive doors



Wet environments



Mounted on metal surface




Readers mounted together

300mm
between readers

Fitting



Wire outputs

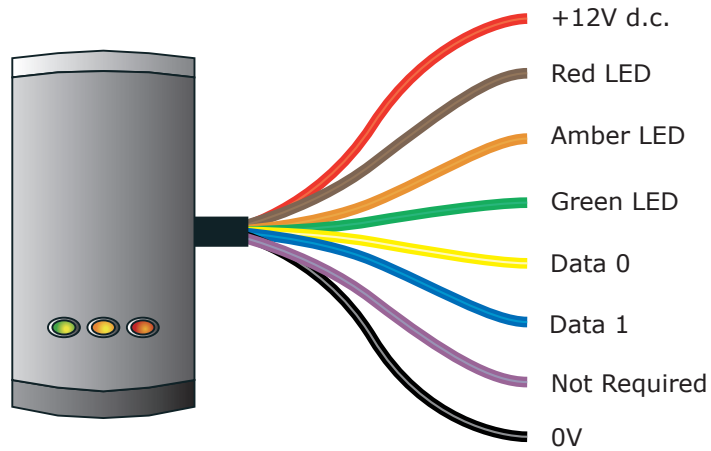

Specifications			
	Min	Max	
Environment			
Operating temperature	-20 °C	+55 °C	
Cable length			5 metres
IP Rating	IPX7		Outdoor Use
Electrical			
Voltage	8V DC	14V DC	
Current	50 mA	120 mA	
Carrier frequency			125 kHz
Wiegand format			26 bits
Dimensions			
	Width	Height	Depth
Reader	50mm	100mm	15mm

CE0168

Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of the Directive 1999/5/EC. This equipment is intended for use in all the EU and EFTA countries and all other countries worldwide. The declaration of conformity may be consulted at - <http://paxton.info/596>

Cable extensions

Readers can be extended using Beldon CR9540 10-core overall screened cable. The maximum cable length between reader and controller is 100 metres.