

EH14 Series Enclosure

INDOOR/OUTDOOR, COMPACT, DUST- AND MOISTURE-RESISTANT

Product Features

- Temperature Range from -40° to 60°C (-40° to 140°F)
- Anti-UV, Flame-Retardant Polycarbonate Plastic
- IP66 Dust- and Moisture-Resistant
- Suitable for Analog and IP Network Cameras
- Input Power Options: 24 VAC or 230 VAC
- 24 VAC Camera Power Included with Power Supplies
- Advanced Optics for Megapixel Camera Support
- IK10 (20J) Impact Resistance



The **EH14 Series** enclosure offers two integrated power supply options for 24 VAC power input and 230 VAC power input; both units supply 24 VAC to the camera.

The enclosure is designed to operate in temperatures ranging from -40° to 60°C (-40° to 140°F). The EH14-2 and EH14-3 models are equipped with a heater/blower.

The injection-molded enclosures are tight-fitting and IP66 rated for protection against dust and moisture. The polycarbonate plastic material is UV protected and flame-retardant.

The **EH14 Series** enclosure is designed to accommodate analog cameras and IP megapixel cameras.

TECHNICAL SPECIFICATIONS

MODELS

Model Number	Basic Enclosure	24 VAC with 24 VAC Camera Power (maximum 8 W)	230 VAC with 24 VAC Camera Power (maximum 8 W)	Heater/Blower	Max. Power Consumption*
EH14	•				0 W
EH14-2	•	•		•	30 W
EH14-3	•		•	•	25 W

*Maximum Power Consumption does not include camera wattage.

GENERAL

Construction	Polycarbonate plastic, UV protected and flame-retardant	
Finish	Gray polyester powder coat	
Environment	Indoor/outdoor	
Operating Temperature	-40° to 60°C (-40° to 140°F)	
Storage Temperature	-50° to 75°C (-46° to 167°F)	
Weight	Unit	Shipping
EH14	1.0 kg (2.2 lb)	2.2 kg (4.7 lb)
EH14-2	1.1 kg (2.4 lb)	2.3 kg (5.1 lb)
EH14-3	1.4 kg (3.1 lb)	2.6 kg (5.7 lb)
Vandal Resistance	IK10 (20J)	

MECHANICAL

Camera and Lens Size	Accepts camera and lens combinations [†] (including all wiring) up to 27.94 x 8.25 x 10.16 cm (11.00" L x 3.25" W x 4.00" H)	
Viewing Window		
EH14	Glass	
EH14-2	Glass	
EH14-3	Optical grade Lexan™, IK10 rated	
Latching	2 captivated Torx T25 screws	
Face Plate	4 Phillips screws	
Cable Entry	2 adjustable 0.5-inch NPT liquid-tight glands	

[†]Assumes lens is fully extended.

ELECTRICAL

Input Power	24 VAC or 230 VAC
Input Voltage	
24 VAC	±10% VAC
230 VAC	±10% VAC

CERTIFICATIONS/PATENTS

- CE, Class A
- Meets NEMA Type 4 and IP66 standards

RECOMMENDED MOUNTS

Ceiling

EM3000	Light duty ceiling mount; maximum load 9.07 kg (20 lb)
--------	--

Wall


EM14	Light duty wall mount; maximum load 9.07 kg (20 lb)
EM2400	Medium duty wall mount; maximum load 18.14 kg (40 lb) feedthrough (tilt angle of ±90°)
EM1900U, EM22	Medium duty wall mount; maximum load 18.14 kg (40 lb)


Pedestal

EM1009U, EM1015U, MM22	Medium duty pedestal mount, maximum load 18.14 kg (40 lb)
------------------------	---

Pipe/Pole

EM1109, EM2000, EM2200	Medium duty mounts for pipe/pole applications; maximum load 18.14 kg (40 lb); fit poles with 7.62 cm (3-inch) to 20.32 cm (8-inch) diameters
------------------------	--

 VALUES IN PARENTHESES ARE INCHES; ALL OTHERS ARE CENTIMETERS.

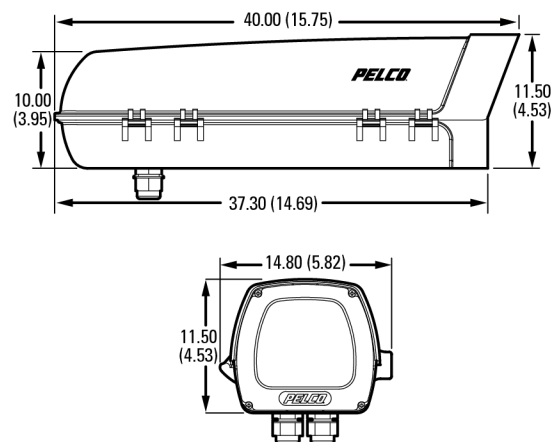

Pelco, Inc.
625 W. Alluvial Ave., Fresno, CA 93711 United States
USA & Canada Tel (800) 289-9100 Fax (800) 289-9150
International Tel +1 (559) 292-1981 Fax +1 (559) 348-1120
www.pelco.com

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.
⚠ ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov.
⚠ AVERTISSEMENT: Cancer et Troubles de l'appareil reproducteur - www.P65Warnings.ca.gov.

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. ONVIF and the ONVIF logo are trademarks of ONVIF Inc. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice. ©Copyright 2017, Pelco, Inc. All rights reserved.