

## EH4010/EH4014 Enclosure INDOOR, MEDIUM

### Product Features

- Low Cost
- Indoor Applications
- Contemporary Design
- Medium Sizes
- For Use with Fixed Mount or Pan/Tilt
- Easy Access for Service and Installation
- For Use with Medium-to-Large Format Cameras
- Upright or Inverted Applications




EH4014

The **EH4000 Series** are low cost camera enclosures designed especially for indoor applications.

The enclosure features a removable rear cap for easy access to camera sled. Adjustable glands on the rear cap allow for easy installation of the power and video cables, and a removable front cap allows the installer to manually adjust the lens without removing the camera.

The **EH4010** can be used with medium format cameras and the **EH4014** can be used with medium-to-large format cameras. The **EH4014** will accommodate fixed focal length lenses or motorized zoom lenses (with or without auto iris).

These enclosures can be used in fixed mount applications or mounted to a light duty pan/tilt, such as our PT270 Series or PT280-24P. They can also be used with our PS20 Series scanner (when used indoors).

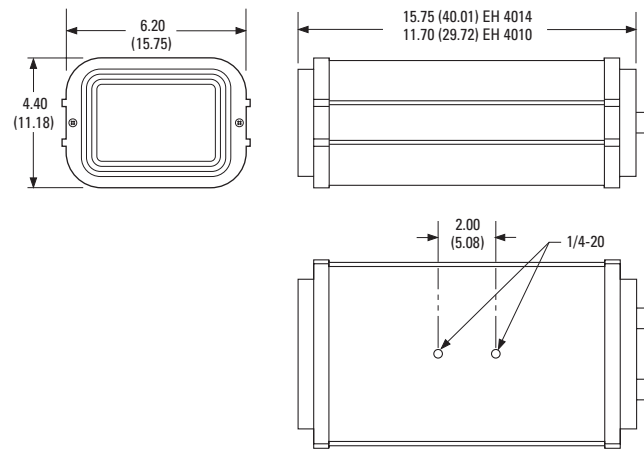

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS;  
ALL OTHERS ARE INCHES.

EH4010/EH4014 DIMENSION DRAWING



DataFAX  
SPEC: 2413  
MANUAL: 24136

C413 / REVISED 10-02



## TECHNICAL SPECIFICATIONS

### MODELS

EH4010	Extruded aluminum enclosure, 11.70-inch (29.71 cm) body length
EH4014	Extruded aluminum enclosure, 15.75-inch (40.01 cm) body length

### MECHANICAL

Camera Mounting	
EH4010	Adjustable L-shaped bracket with one mounting hole attached to the slide-out rail
EH4014	Multiple holes on removable camera sled
Maximum Camera and Lens Size	Accepts camera and lens combinations* (including BNC connector) up to:
EH4010	3.50" H x 5.25" W x 8.00" L (8.89 x 13.33 x 20.32 cm)
EH4014	3.50" H x 5.25" W x 12.00" L (8.89 x 13.33 x 30.48 cm)
Viewing Window	0.125" (3.17 mm) thick Lexan®
Viewing Window Area	2.50" H x 3.75" W (6.35 x 9.52 cm)
Cable Entry	Two compression glands on rear cap; maximum 5/16" (0.79 cm) cable diameter

\*Assumes lens is fully extended.

### GENERAL

Construction	Extruded aluminum body; injection molded black ABS plastic end caps
Finish	Gray polyester powder coat
Environment	Indoor only
Unit Weight	
EH4010	3.68 lb (1.67 kg)
EH4014	4.98 lb (2.26 kg)
Shipping Weight	
EH4010	5 lb (2.26 kg)
EH4014	6 lb (2.7 kg)

### CERTIFICATIONS

- CE, Class B
- UL Listed

### OPTIONAL ACCESSORIES

LK4000	Tamper-proof screw kit. Includes 100 tamper-proof screws and one insertion/removal tool.
--------	--

### RECOMMENDED MOUNTS

<b>Ceiling/Pedestal</b>	EM1009U, EM1015U	Medium duty ceiling/pedestal mount; maximum load 40 lb (18.12 kg)
	EM3000	Ceiling J-mount; maximum load 40 lb (18.12 kg)
	MM22	Medium duty ceiling/pedestal mount; maximum load 40 lb (18.12 kg)
<b>Wall</b>	EM1400	Light duty wall mount; maximum load 20 lb (9.06 kg)
	EM1900U	Medium duty wall mount; maximum load 40 lb (18.12 kg)
	EM2400	Light duty wall mount; maximum load 20 lb (9.06 kg)
<b>Pipe/Pole</b>	EM22	Medium duty wall mount; maximum load 40 lb (18.12 kg)
	EM1109	Medium duty pedestal mount for vertical pipe or pole applications; maximum load 40 lb (18.12 kg)
	EM2000	Medium duty mount for vertical pipe or pole applications; maximum load 40 lb (18.12 kg)
	EM2200	Medium duty mount for horizontal pipe or pole applications; maximum load 40 lb (18.12 kg)

### RECOMMENDED PAN/TILTS

PT270 Series	Light duty pan/tilt, 24/120/230 VAC; maximum load 15 lb (6.8 kg)
PT280-24P	Light duty pan/tilt, 24 VAC, with pre-wired cable; maximum load 15 lb (6.8 kg)
PS20 Series	Medium duty scanner, 24/120/230 VAC; maximum load 35 lb (15.7 kg)



**Pelco Worldwide Headquarters:**  
3500 Pelco Way, Clovis, California 93612-5699 USA  
**USA & Canada** Tel: (800) 289-9100 • FAX (800) 289-9150 • DataFAX (800) 289-9108  
**International** Tel: (559) 292-1981 • FAX (559) 348-1120 • DataFAX (559) 292-0435  
[www.pelco.com](http://www.pelco.com)

Lexan® is a registered trademark of the General Electric Company.  
Specifications subject to change without notice.  
©Copyright 2002, Pelco. All rights reserved.