



# PRODUCT SPECIFICATION

## CM4400/EM4400 Series Mount CEILING/WALL MOUNT, CAMERA



### Product Features

- Ceiling or Wall Mounting
- Choose from Swivel Head or Adjustable Tilt Table Models
- Cable Feedthrough Hole
- CM4450/EM4450 for use with Cameras Only
- CM4400/EM4400 Can Also be Used with Light-Weight Enclosures
- CM4400/EM4400 Support up to 15 Pounds (6.75 kg); CM4450/EM4450 Support up to 7 Pounds (3.15 kg)
- EM4400 and EM4450 can be Mounted to a Single-Wired, Standard "J-box" Outlet




The **CM4400** and **EM4400 Series** are light-duty camera mounts. These mounts are designed primarily for use with lightweight cameras, but can be used with small camera enclosures such as the EH3010 and EH3014.

Equipped with an adjustable tilt table and cable feedthrough hole (coax, 2-conductor, for camera power), both mounts are capable of supporting up to 15 pounds (6.75 kg). The **CM4400** is for ceiling mount applications and the **EM4400** is for wall mount applications.

The **CM4450** and **EM4450** are light-duty camera mounts and are not recommended for use with enclosures. These mounts feature an adjustable swivel head with set screw for final positioning of the camera and cable feedthrough hole (coax, 2-conductor, for camera power). They are designed for use with cameras weighing up to 7 pounds (3.15 kg). The **CM4450** is for ceiling mount applications and the **EM4450** is for wall mount applications.

In addition, the **EM4400** and **EM4450** can be mounted directly to any single-wired, standard "J-box" outlet.

All mounts in this series are for indoor use only.

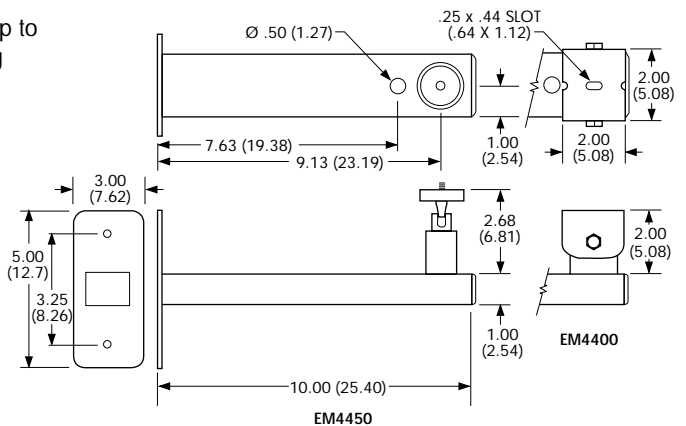

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE IN INCHES.

EM4400/EM4450 DIMENSION DRAWING





# TECHNICAL SPECIFICATIONS

## MODEL

- CM4400 Light-duty ceiling "J" mount with cable feedthrough hole (coax, 2-conductor, for camera power) and manually adjustable tilt table. For use with lightweight cameras and enclosures
- CM4450 Light-duty ceiling "J" mount with cable feedthrough hole (coax, 2-conductor, for camera power) and swivel head. For use with light-weight cameras only
- EM4400 Light-duty wall mount with cable feedthrough hole (coax, 2-conductor, for camera power) and manually adjustable tilt table. For use with lightweight cameras and enclosures
- EM4450 Light-duty wall mount with cable feedthrough hole (coax, 2-conductor, for camera power) and swivel head. For use with light-weight cameras only

## MECHANICAL


- Pan Adjustment Unlimited 360°
- Tilt Adjustment: ±90°
- Locking Method
  - CM4400/EM4400 Three 1/4-20 hex head bolts
  - CM4450/EM4450 Set screw secures swivel assembly
- Camera Mounting
  - CM4400/EM4400 1/4-20 mounting bolt (supplied)
  - CM4450/EM4450 1/4-20 threaded stud and nut
- Enclosure Mounting
- Maximum Load
  - CM4400/EM4400 15 lb (6.75 kg)
  - CM4450/EM4450 7 lb (3.15 kg)

## GENERAL

- Construction Steel
- Finish Gray polyester powder coat
- Unit Weight
  - CM4400 3.62 lb (1.64 kg)
  - CM4450 1.35 lb (0.61 kg)
  - EM4400 2.70 lb ( 1.22 kg)
  - EM4450 2.34 lb (1.06 kg)
- Shipping Weight
  - CM4400 5 lb (2.26 kg)
  - CM4450 3 lb (1.35 kg)
  - EM4400 4 lb (1.81 kg)
  - EM4450 3 lb (1.35 kg)

## CERTIFICATIONS

- ◆ UL listed to Standard 2044 (CM4450 only)

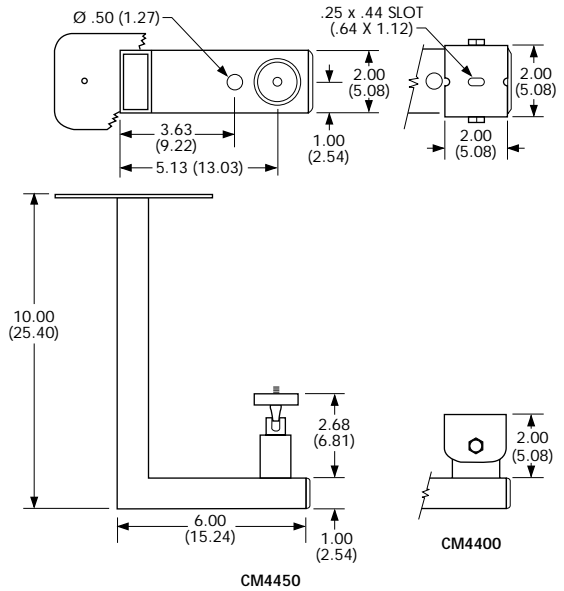

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE IN INCHES.

CM4400/CM4450 DIMENSION DRAWING

■ Indicates change or addition since last revision.

Specifications subject to change without notice.  
©Copyright 2000, Pelco. All rights reserved.