


PWR-24AC-16-8UL



16 Camera 24VAC 8Amp Power Supply

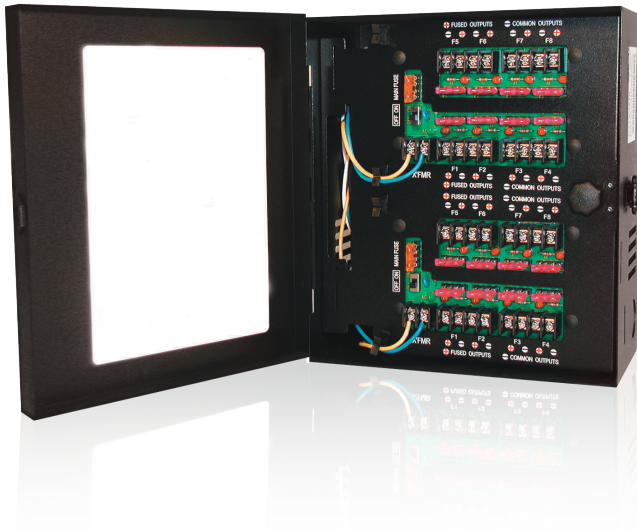

The PWR-24AC-16-8UL is a UL listed CCTV power center engineered to manage remote camera and accessory power requirements. The PWR-24AC-16-8UL distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories. It will provide 24Volts AC to sixteen fused outputs with a total of 8.0 Amps continuous supply current via two 4.0 Amp supplies. The PWR-24AC-16-8UL power center is housed in a premium heavy gauge metal enclosure.

Key Features

- Convenient screw and terminal and fuse access
- AC power LED indicator
- Includes transformer and spare fuses
- Lockable heavy gauge metal enclosure
- Uses easy to find automotive style fuses

Technical Specifications

PWR-24AC-16-8UL

FEATURES

- Convenient screw and terminal and fuse access
- Separation panel between transformers and output access
- Power ON/OFF switch
- Individual LED's for each fused output
- AC power LED indicator
- Double coated polyurethane finish
- Multiple knockouts to accommodate various wiring configurations
- Uses easy to find automotive style fuses
- Includes transformer and spare fuses
- Lockable heavy gauge metal enclosure

SPECIFICATIONS

| | |
|--|---|
| Input | 115VAC 50/60 HZ; 1.8 Amps |
| Output | 3 Amps |
| Two 4 Amp 100 VA supply currents at 70°F | |
| Fuse | 5 Amps |
| Sixteen 24VAC individually fused outputs | |
| Unit maintains camera synchronization | |
| Transformers | Two (2) 110VAC/24VAC, 100VA |
| Enclosure Dimensions | 254 x 228.6 x 114.3mm (10" x 9" x 4.5") |
| UL listed | |

Dimensions

Unit : mm (inch)

