

**Clearly Captured with
Full HD and 20x Zoom
in Complete Darkness**




SNP-6200RH

2MP 1080p Full HD 20x Network IR Dome Camera

- Max. 2MP (1920x1080) resolution
- 16 : 9 Full HD (1080p) resolution support
- Built-in 20x optical zoom lens (4.45 ~ 89mm)
- WDR, UPnP and face detection support
- IP66/IK10, IR LED (IR distance 100m, LED 2ea)

The SNP-6200RH is a Full HD PTZ dome camera with 20x optical zoom and focused IR illumination. The IR function illuminates objects at a distance of up to 100m by focusing the beam as the camera zooms, resulting in clear imaging in total darkness. The SNP-6200RH is also IP66 environment protected, IK10 vandal resistant and can withstand high temperature variations of -50°C to +55°C.

SNP-6200RH




Specifications



	SNP-6200RHN	SNP-6200RHP
VIDEO		
Imaging Device	1/3" 2M PS CMOS	
Total Pixels	2,010(H) x 1,108(V)	
Effective Pixels	1,944(H) x 1,092(V)	
Scanning System	Progressive	
Min. Illumination	Color : 1.5Lux (F1.6, 50IRE), B/W : 0Lux (IR LED on)	
S / N Ratio	50dB	
Video Output	CVBS : 1.0 Vp-p / 75Ω composite, 704 x 480(N), 704 x 576(P), for installation	
LENS		
Focal Length (Zoom Ratio)	4.45 ~ 89mm (20x)	
Max. Aperture Ratio	F1.6(Wide) / F2.9(Tele)	
Angular Field of View	H : 62.9°(Wide) ~ 3.10°(Tele) / V : 43.32°(Wide) ~ 2.34°(Tele)	
Min. Object Distance	1m (3.28ft)	
Focus Control	Auto / Manual / One shot	
Lens Type	DC auto iris	
Mount Type	Board-in type	
PAN / TILT / ROTATE		
Pan Range	360° Endless	
Pan Speed	Preset : 250°/sec, Manual : 0.024°/sec ~ 120°/sec	
Tilt Range	190°(-5° ~ 185°)	
Tilt Speed	Preset : 250°/sec, Manual : 0.024°/sec ~ 120°/sec	
Preset	255ea	
Preset Accuracy	±0.1°	
OPERATIONAL		
IR LED	2ea	
Viewable Length	100m (328.08ft)	
Camera Title	Off / On (Displayed up to 15 characters)	
Day & Night	Auto (ICR) / Color / B/W	
Backlight Compensation	Off / BLC / HLC / WDR	
Wide Dynamic Range	60dB	
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)	
Digital Noise Reduction	SSNR/III (2D+3D noise filter) (Off / On)	
Digital Image Stabilization	Off / On	
Motion Detection	Off / On (1 programmable zones)	
Privacy Masking	Off / On (8 Rectangle programmable zones)	
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)	
Gain Control	Off / Low / Medium / High / Manual	
White Balance	ATW / Outdoor / Indoor / Manual / AWC (2,400°K ~ 10,500°K)	
Electronic Shutter Speed	Auto / FLK / Manual (1/30 ~ 33,000sec) Auto / FLK / Manual (1/25 ~ 33,000sec)	
Digital Zoom	Off / On (1x ~ 8x)	
Flip / Mirror	Off / On	
Intelligent Video Analytics	Tampering (Scene change), Virtual line, Enter / Exit, Appear / Disappear, Audio detection, Face detection (5ea)	
Alarm I/O	Input 4ea / Output 3ea	
Remote Control Interface	RS-485/422	
RS-485 Protocol	Samsung-T/E, Pelco-P/D, Panasonic, Honeywell, AD, Vicon, Bosch, GE	
Alarm Triggers	Alarm input, Motion detection, Intelligent video analytics, Network disconnect	
Alarm Events	File upload via FTP and E-mail, Notification via E-mail, TCP, Local storage (SD/SDHC/SDXC) recording at Network disconnected, External output, PTZ preset	
NETWORK		
Ethernet	RJ-45 (10/100BASE-T)	
Video Compression Format	H.264 (MPEG-4 part 10/AVC), MJPEG	
Resolution	1920 x 1080P (Full HD), SXGA (1280 x 1024), 1280 x 960, HD (16 : 9, 1280 x 720p), 1024 x 768, SVGA (800 x 600), VGA (640 x 480), QVGA (320 x 240)	
Max. Framerate	30fps (When WDR on, Max. framerate is Max 15fps.) 25fps (When WDR on, Max. framerate is Max 15fps.)	
Video Quality Adjustment	H.264 : Compression level, Target bitrate level control, MJPEG : Quality level control	
Bitrate Control Method	H.264 : CBR or VBR, MJPEG : VBR	
Streaming Capability	Multiple streaming (Up to 6 profiles)	
Audio I/O	Mic(Line)-in selectable via UI, Line-out (Mono, 1Vrms)	
Audio Compression Format	G.711 u-law, G.726	
Audio Communication	Bi-directional audio	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP	
Security	HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1x authentication	
Streaming Method	Unicast / Multicast	
Max. User Access	10 users at unicast mode	
Memory Slot	SD/SDHC memory slot	
ONVIF Conformance	Yes	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek	
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 7.0 or Higher, Firefox, Google Chrome, Apple Safari *Apple Safari, Windows Internet Explorer 9.0(32bit) / 8.0(32bit) / 7.0(32bit) *For Mac OS X, only the Safari browser is supported.	
Central Management Software	SmartViewer 4.0	
ENVIRONMENTAL		
Operating Temperature / Humidity	-50°C ~ +55°C (-58°F ~ +131°F) / Less than 100% RH	
Ingress Protection	IP66 grade	
Vandal Resistance	IK10	
ELECTRICAL		
Input Voltage / Current	24V AC only	
Power Consumption	Max. 30W (Heater Off) / 35W (Heater Off, IR on), 90W (Heater On, IR on)	
MECHANICAL		
Color / Material	Ivory / Aluminum	
Dimensions (WxH)	Ø248.0 x 399.5mm (Ø9.76" x 15.73")	
Weight	6.6Kg (14.95 lb)	

Dimensions

Unit : mm (inch)

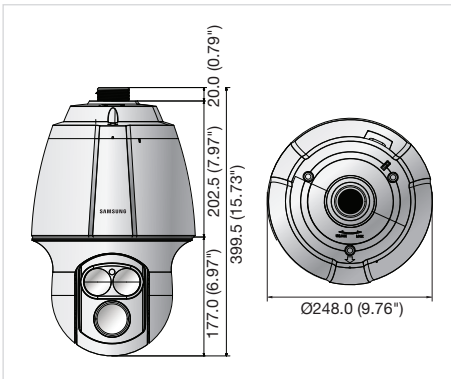

Accessory (Optional)



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY

SAMSUNG TECHWIN CO., LTD. 701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.
100 Challenger Rd, Suite 700 Ridgely Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124

SAMSUNG TECHWIN EUROPE LTD.
2st floor No5, The Height, Brookland, Weybridge, Surrey, U.K.
KT13 0NY
Tel : +44-1932-82-6700 Fax : +44 1932 82 6701

SHANGHAI SAMSUNG TECHWIN CO., LTD.
32F, Bk B, International Business Center,
No. 391 Guiping Rd., Shanghai, China, 200233
Tel : +86-21-5427-1155 Fax : +86-21-5423-5122



SAMSUNG TECHWIN