

Enterprise Capacity 3.5 HDD


Data Sheet

Capacity-Optimised Enterprise Hard Drive for Bulk-Data Applications

- Highest-capacity large form factor enterprise drive - 50% more capacity over last generation with up to 6TB - for demanding data growth¹
- Fastest high-capacity HDD with best-in-class random and sequential read/write performance
- Eighth-generation drive technology for reliable access to bulk storage of unstructured data
- Both 12Gb/s SAS and SATA 6Gb/s interfaces for easy integration into replicated and RAID storage systems
- Enhanced error correction, super parity and end-to-end SAS-based data integrity for accurate data storage
- Industry-leading rotational vibration tolerance ensures consistent performance.
- Improved power and cooling efficiencies with low power consumption and on-demand PowerChoice™ technology based on T10/T13 power management standards
- Engineered for 24x7 workloads of 550TB/yr - 10x that of desktop drives
- Robust performance with dual processors, ramp load technology, top-cover-attached motor and humidity sensor for optimum performance in all chassis
- Self-Encrypting Drive (AES-256) with FIPS 140-2 validation and Seagate Instant Secure Erase cuts IT drive retirement costs while protecting data at rest securely.^{2,3}

Best-fit Applications

- Hyperscale applications
- High-capacity RAID storage
- Mainstream enterprise external storage arrays (SAN, NAS, DAS)
- Cloud data centres - replicated bulk data storage
- Enterprise backup and restore - D2D, virtual tape
- Centralised surveillance

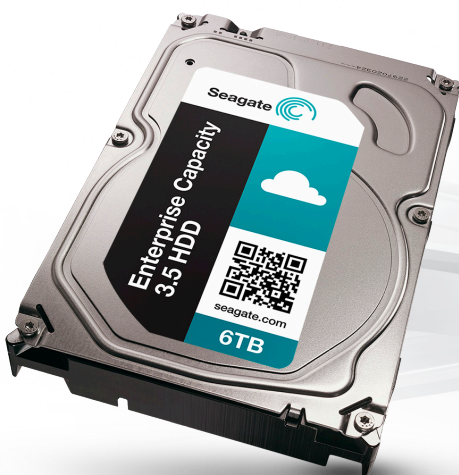

¹ Seagate recommends validating your configuration with your HBA/RAID controller manufacturer to ensure full capacity capabilities.

² Self-Encrypting Drives (SED) and FIPS 140-2 Validated drives are not available in all models or countries; may require TCG-compliant host or controller support.

³ FIPS 140-2 in review. See FIPS 140- Level 2 Certificate at <http://csrc.nist.gov/groups/STM/cmvp/documents/140-1/1401val2011.htm#1635>

Enterprise Capacity 3.5 HDD



| Specifications | SATA 6Gb/s | | | |
|--|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | 6TB ^{1,2} | 5TB ^{1,2} | 4TB ^{1,2} | 2TB ¹ |
| Standard Model Number (4KN) | ST6000NM0004 | — | — | — |
| Standard Model Number (512E) | ST6000NM0024 | ST5000NM0024 | ST4000NM0024 | ST2000NM0024 |
| SED Model Number (512E) | ST6000NM0044 ³ | ST5000NM0044 ³ | ST4000NM0044 ³ | ST2000NM0044 ³ |
| SED-FIPS Model Number (512E) | ST6000NM0084 ^{3,4} | — | — | — |
| Features | | | | |
| Humidity Sensor | Yes | Yes | Yes | Yes |
| Super Parity | Yes | Yes | Yes | Yes |
| Low Halogen | Yes | Yes | Yes | Yes |
| PowerChoice™ Technology | Yes | Yes | Yes | Yes |
| Hot-Plug Support ⁶ | Yes | Yes | Yes | Yes |
| Cache, Multi-segmented (MB) | 128 | 128 | 128 | 128 |
| Reliability/Data Integrity | | | | |
| Mean Time Between Failures (MTBF, hours) | 1.4M | 1.4M | 1.4M | 1.4M |
| Reliability Rating at Full 24x7 Operation (AFR) | 0.63% | 0.63% | 0.63% | 0.63% |
| Non-recoverable Read Errors per Bits Read | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ |
| Power-On Hours per Year | 8,760 (24x7) | 8,760 (24x7) | 8,760 (24x7) | 8,760 (24x7) |
| Sector Size (Bytes per Sector) | 512 | 512 | 512 | 512 |
| Limited Warranty (years) | 5 | 5 | 5 | 5 |
| Performance | | | | |
| Spindle Speed (RPM) | 7,200 | 7,200 | 7,200 | 7,200 |
| Interface Access Speed (Gb/s) | 6.0, 3.0, 1.5 | 6.0, 3.0, 1.5 | 6.0, 3.0, 1.5 | 6.0, 3.0, 1.5 |
| Max. Sustained Transfer Rate 0D (MB/s) | 216 | 216 | 216 | 216 |
| Average Latency (ms) | 4.16 | 4.16 | 4.16 | 4.16 |
| Interface Ports | Single | Single | Single | Single |
| Rotational Vibration @ 1,500Hz (rad/s ²) | 12.5 | 12.5 | 12.5 | 12.5 |
| Power Consumption | | | | |
| Idle Power, Average (W) | 6.9 | 6.9 | 6.0 | 4.5 |
| Typical Operating, Random Read (W) | 11.27 | 11.27 | 9.42 | 8.08 |
| Power Supply Requirements | +12V and +5V | +12V and +5V | +12V and +5V | +12V and +5V |
| Environmental | | | | |
| Temperature, Operating (°C) | 5 to 60 | 5 to 60 | 5 to 60 | 5 to 60 |
| Vibration, Non-operating: 10Hz to 500Hz (Grms) | 5.0 | 5.0 | 5.0 | 5.0 |
| Shock, Operating, 2ms (Read/Write) (Gs) | 70/40 | 70/40 | 70/40 | 70/40 |
| Shock, Non-operating, 1ms and 2ms (Gs) | 250 | 300 | 300 | 300 |
| Physical | | | | |
| Height (in/mm, max) ⁵ | 1.028/26.1 | 1.028/26.1 | 1.028/26.1 | 1.028/26.1 |
| Width (in/mm, max) ⁵ | 4.010/101.85 | 4.010/101.85 | 4.010/101.85 | 4.010/101.85 |
| Depth (in/mm, max) ⁵ | 5.878/147.0 | 5.878/147.0 | 5.878/147.0 | 5.878/147.0 |
| Weight (lb/g) | 1.720/780 | 1.720/780 | 1.400/635 | 1.344/605 |
| Carton Unit Quantity | 20 | 20 | 20 | 20 |
| Cartons per Pallet | 40 | 40 | 40 | 40 |
| Cartons per Layer | 8 | 8 | 8 | 8 |

¹ One gigabyte, or GB, equals one billion bytes; and one terabyte, equals one trillion bytes when referring to drive capacity.

² Seagate recommends validating your configuration with your HBA/RAID controller manufacturer to ensure full capacity capabilities.

³ Self-Encrypting Drives (SED) and FIPS 140-2 Validated drives are not available in all models or countries; may require TCG-compliant host or controller support.

⁴ FIPS 140-2 in review. See FIPS 140-2 Level 2 Certificate at: <http://csrc.nist.gov/groups/STM/cmvp/documents/140-1/1401val2011.htm#1635>

⁵ These base deck dimensions conform to the Small Form Factor Standard (SFF-8201) found at www.sffcommittee.org. For connector-related dimensions, see SFF-8223.

⁶ Supports Hotplug operation per Serial ATA Revision 2.6 specification.



Enterprise Capacity 3.5 HDD



| Specifications | 12Gb/s SAS | | | |
|--|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | 6TB ^{1,2} | 5TB ^{1,2} | 4TB ^{1,2} | 2TB ¹ |
| Standard Model Number (4KN) | ST6000NM0014 | — | — | — |
| Standard Model Number (512E) | ST6000NM0034 | ST5000NM0034 | ST4000NM0034 | ST2000NM0034 |
| SED Model Number (512E) | ST6000NM0054 ³ | ST5000NM0054 ³ | ST4000NM0054 ³ | ST2000NM0054 ³ |
| SED-FIPS Model Number (512E) | ST6000NM104 ^{3,4} | — | — | — |
| Features | | | | |
| Protection Information (T10 DIF) | Yes | Yes | Yes | Yes |
| Humidity Sensor | Yes | Yes | Yes | Yes |
| Super Parity | Yes | Yes | Yes | Yes |
| Low Halogen | Yes | Yes | Yes | Yes |
| PowerChoice Technology | Yes | Yes | Yes | Yes |
| Cache, Multi-segmented (MB) | 128 | 128 | 128 | 128 |
| Reliability/Data Integrity | | | | |
| Mean Time Between Failures (MTBF, hours) | 1.4M | 1.4M | 1.4M | 1.4M |
| Reliability Rating at Full 24x7 Operation (AFR) | 0.63% | 0.63% | 0.63% | 0.63% |
| Non-recoverable Read Errors per Bits Read | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ | 1 sector per 10 ¹⁵ |
| Power-On Hours per Year | 8,760 (24x7) | 8,760 (24x7) | 8,760 (24x7) | 8,760 (24x7) |
| Sector Size (Bytes per Sector) | 512, 520, 528 | 512, 520, 528 | 512, 520, 528 | 512, 520, 528 |
| Limited Warranty (years) | 5 | 5 | 5 | 5 |
| Performance | | | | |
| Spindle Speed (RPM) | 7,200 | 7,200 | 7,200 | 7,200 |
| Interface Access Speed (Gb/s) | 12.0, 6.0, 3.0 | 12.0, 6.0, 3.0 | 12.0, 6.0, 3.0 | 12.0, 6.0, 3.0 |
| Max. Sustained Transfer Rate OD (MB/s) | up to 226 | up to 226 | up to 226 | up to 226 |
| Average Latency (ms) | 4.16 | 4.16 | 4.16 | 4.16 |
| Interface Ports | Dual | Dual | Dual | Dual |
| Rotational Vibration @ 1,500Hz (rad/s ²) | 12.5 | 12.5 | 12.5 | 12.5 |
| Power Consumption | | | | |
| Idle Power, Average (W) | 7.97 | 6.96 | 5.73 | 4.84 |
| Typical Operating, Random Read (W) | 11.86 | 10.72 | 9.59 | 8.93 |
| Power Supply Requirements | +12V and +5V | +12V and +5V | +12V and +5V | +12V and +5V |
| Environmental | | | | |
| Temperature, Operating (°C) | 5 to 60 | 5 to 60 | 5 to 60 | 5 to 60 |
| Vibration, Non-operating: 10Hz to 500Hz (Grms) | 4.9 | 4.9 | 4.9 | 4.9 |
| Shock, Operating, 2ms (Read/Write) (Gs) | 70/40 | 70/40 | 70/40 | 70/40 |
| Shock, Non-operating, 1ms and 2ms (Gs) | 250 | 300 | 300 | 300 |
| Physical | | | | |
| Height (in/mm, max) ⁵ | 1.028/26.1 | 1.028/26.1 | 1.028/26.1 | 1.028/26.1 |
| Width (in/mm, max) ⁵ | 4.010/101.85 | 4.010/101.85 | 4.010/101.85 | 4.010/101.85 |
| Depth (in/mm, max) ⁵ | 5.878/147.0 | 5.878/147.0 | 5.878/147.0 | 5.878/147.0 |
| Weight (lb/g) | 1.720/780 | 1.720/780 | 1.400/635 | 1.344/605 |
| Carton Unit Quantity | 20 | 20 | 20 | 20 |
| Cartons per Pallet | 40 | 40 | 40 | 40 |
| Cartons per Layer | 8 | 8 | 8 | 8 |

¹ One gigabyte, or GB, equals one billion bytes; and one terabyte, equals one trillion bytes when referring to drive capacity.

² Seagate recommends validating your configuration with your HBA/RAID controller manufacturer to ensure full capacity capabilities.

³ Self-Encrypting Drives (SED) and FIPS 140-2 Validated drives are not available in all models or countries; may require TCG-compliant host or controller support.

⁴ FIPS 140-2 in review. See FIPS 140-2 Level 2 Certificate at: <http://csrc.nist.gov/groups/STM/cmvp/documents/140-1/140-1val2011.htm#1635>

⁵ These base deck dimensions conform to the Small Form Factor Standard (SFF-8201) found at www.sffcommittee.org. For connector-related dimensions, see SFF-8223.



www.seagate.com

AMERICAS Seagate Technology LLC 10200 South De Anza Boulevard, Cupertino, California 95014, United States, +1 408 658 1000
 ASIA/PACIFIC Seagate Singapore International Headquarters Pte. Ltd. 7000 Ang Mo Kio Avenue 5, Singapore 569877, +65 6485 3888
 EUROPE, MIDDLE EAST AND AFRICA Seagate Technology SAS 16-18 rue du Dôme, 92100 Boulogne-Billancourt, France, +33 1 41 86 10 00