
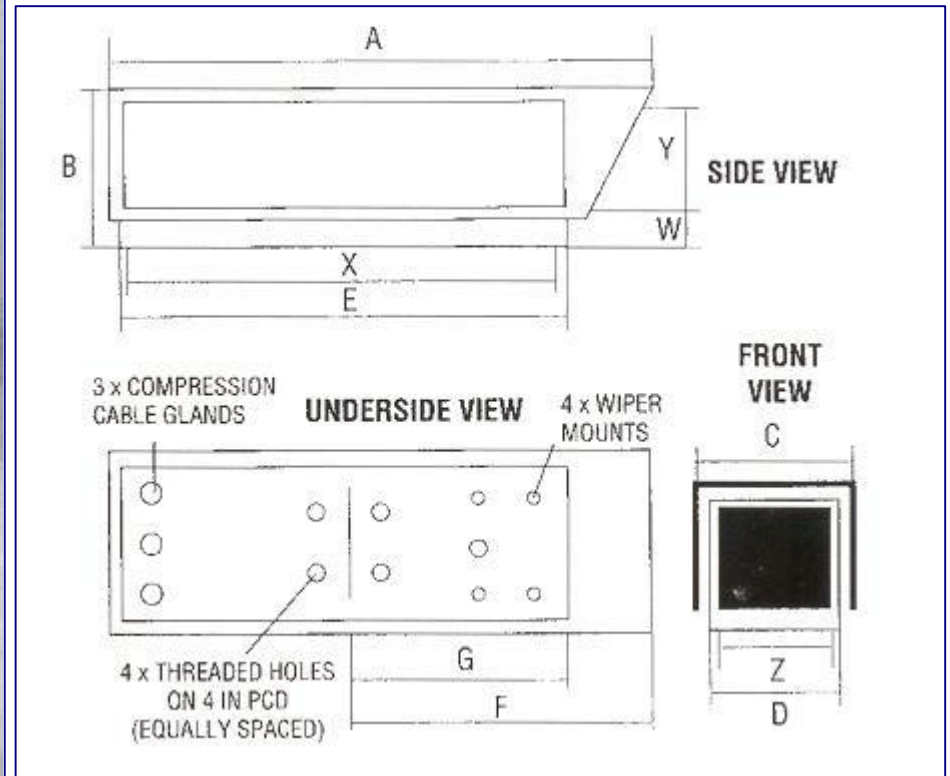


[[Up](#)] [[CH9, CH10 & CH11](#)] [[CH8, CH12, CH13 & CH14](#)] [[CH15 & CH16](#)] [[Extruded Housings](#)] [[Internal Housings](#)] [[Dummy Housings](#)]

CAMERA HOUSINGS - CH8, CH12, CH13 & CH14

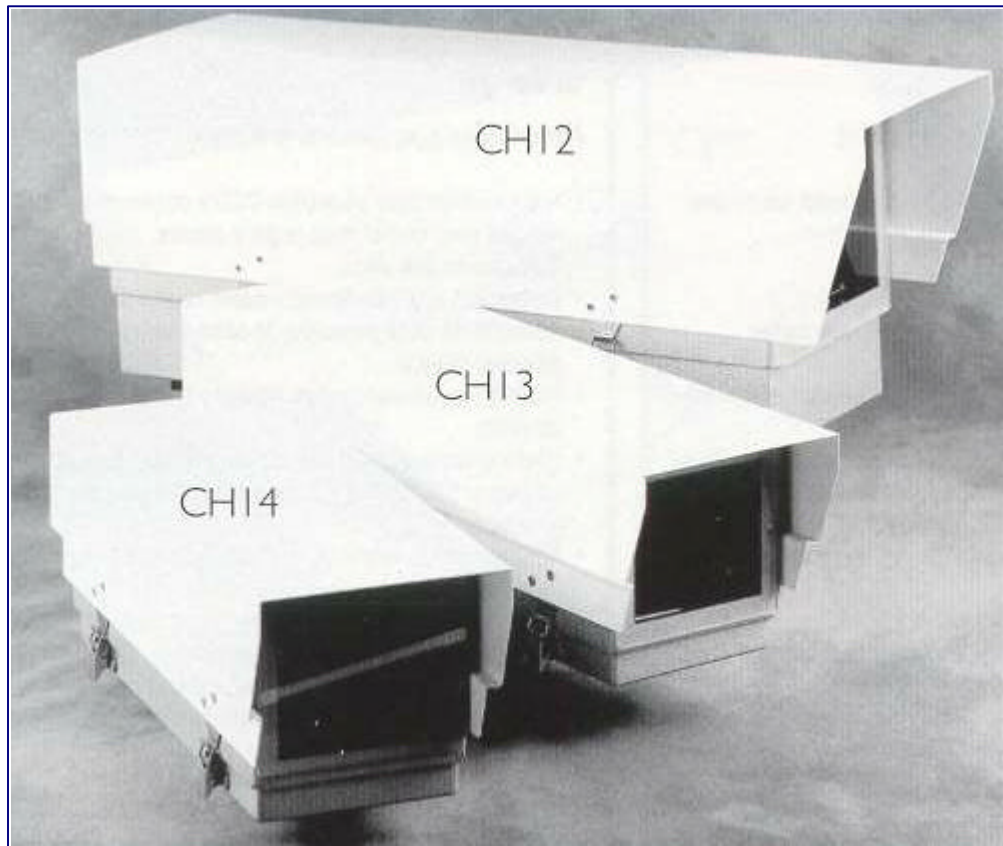

The **Shawley** range of camera housings is designed to make installation as simple as possible. Highly durable for long-life maintenance free operation, allowing you to specify with confidence.

The units in this group are conventional weatherproof housings with a box base construction that not only provides rigidity, but a tray on which to lay wiring and tools whilst an engineer is working. An additional benefit is the facility to mount a portion of the zoom lens below the camera baseline, thus extending the range of useable lenses. All CH housings include an adjustable insulated Paxolin camera platform and a distribution

terminal block. As with most equipment in the **Shawley** range, special requirements can be built to order.

Dimensions in mm	CH8	CH12	CH13	CH14
A	633	750	600	474
B	188	280	168	168
C	216	227	176	176
D	195	202	150	150
E	558	640	533	414
F	322	375	332	255
G	273	280	285	200
W	32	80	32	32
X	555	634	522	401
Y	145	178	123	123
Z	187	195	146	146
Weight	4 kg	4 kg	3.5 kg	3 kg
Heater / demister power	75 W	75 W	35 W	35 W
Recommended wall bracket	WB15	WB15	WD4U	WD4U
Recommended swivel mount	SM2	SM2	SM1	SM
Heavy duty option	+SM2	WB/FP + SM2	WB/FP +SM2	+SM2
Operating voltages	Standard: AC 230v Optional: AC 110v/24v DC 12v/24v	Standard: AC 230v Optional: AC 110v/24v DC 12v/24v	Standard: AC 230v Optional: AC 110v/24v DC 12v/24v	Standard: AC 230v Optional: AC 110v/24v DC 12v/24v

- Manufactured from 16 gauge aluminium sheeting with durable oyster hammer and white powder coat finish
- IP66 weatherproof standard approval
- Box tray format providing rigidity and service platform
- Laminated window to outside of hood, providing a wider wiper sweep and easier replacement
- Stainless steel external fittings for longer life
- Bolt on wiper facility
- Quick release hood for easy access
- Full length sunshield
- Heater / demister and 3 compression cable glands (as standard)
- Adjustable Paxolin camera platform
- Double sunshield and gloss white finish for hot climates
- Internal wiper
- Additional heating and insulation for cold climates
- Tamper resistant external fittings
- Internal stirrer fan to disperse 'hot-spots'
- Operating voltages from 12v DC to 240v AC
- Paint finish to customer specification

[[Up](#)] [[CH9, CH10 & CH11](#)] [[CH8, CH12, CH13 & CH14](#)] [[CH15 & CH16](#)] [[Extruded Housings](#)] [[Internal Housings](#)] [[Dummy Housings](#)]

email [Shawley Webmaster](#) with questions or comments about this site.