

SRS SMART.NET MAGSTRIPE ADD A DOOR KIT THE ACCESS CONTROL KIT

INCLUDED IN THE KIT - 40011101

- 1 x DC2000 control unit with built in power supply and battery charger (40010022)
- 1 x SRS MR4 magstripe reader (40010041)
- 1 x Battery

SRS SMART DC2000

The DC2000 control unit with built in power supply requires 240v ac mains input and provides all power requirements for a single door access control installation. The controller accepts 2000 users maximum. It allows for entry reader, egress button or optional exit reader.

POWER SUPPLY

Voltage output - 12v dc (1 Amp)

MR4 READER

Beautifully styled clock and data magnetic stripe card reader with 4m flying lead. Extend up to 50M with BEL 9536.

ACCESSORIES - NOT INCLUDED IN KIT

MR4 READER

Beautifully styled clock and data magnetic stripe card reader with 4m flying lead. Extend up to 50M with BEL 9536.

KAC BREAK GLASS UNIT

Single pole unit

EGRESS BUTTON

Large size single gang plastic button and back box

MAGNETIC LOCK

600 lb mini magnet, 12/24v operation


MAGNET FITTING BRACKETS

EMV300M Z&L for inward opening doors


EMV100M Adjustable L bracket



MR4

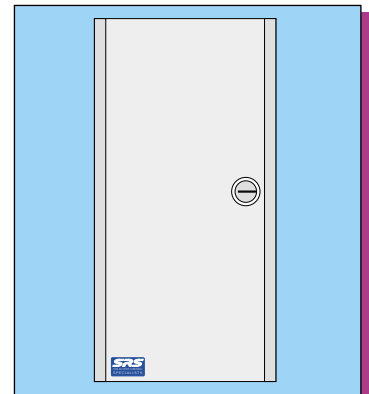

40010022

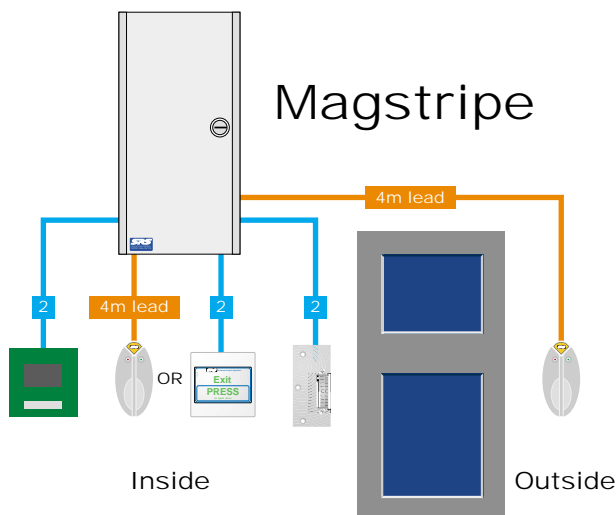

Wiring configuration of a typical door