

SRS SMART SA99MR WITH MAGSTRIPE READER & LOCK RELEASE THE COMPLETE ACCESS CONTROL KIT

INCLUDED IN THE KIT- 40012101

- 1 x SA99 control unit with built in power supply and battery charger (40012001)
- 1 x MR4 magstripe reader (40010041)
- 1 x Lock release (615112 & plates)
- 10 x Magstripe cards(22401)

SRS SA99

The SA99 control unit with built in power supply requires 240v ac mains input and provides all power requirements for a single door access control installation. The controller accepts 99 users maximum. It allows for entry reader, egress button or optional exit reader. There is the facility for time clock to disable all cards and timed relay for lock release (or voltage free) (1 - 99 second timer). 250 user version available.

POWER SUPPLY

Voltage output - 12v dc (1 Amp)

MR4 READER

Beautifully styled clock and data magnetic stripe card reader with 4m flying lead. Extend up to 50M with BEL 9536.

LOCK RELEASE

12v dc fail locked lock release with plates for mortise or rim fitting

EGRESS BUTTON

Large size single gang plastic button and back box

ACCESSORIES - NOT INCLUDED IN KIT

MR4 EXIT READER

Beautifully styled clock and data magnetic stripe card reader with 4m flying lead. Extend up to 50M with BEL 9536.

5200 TIME CLOCK


Time clock inhibits card (or token) operation.

KAC BREAK GLASS UNIT


single pole unit



MR4

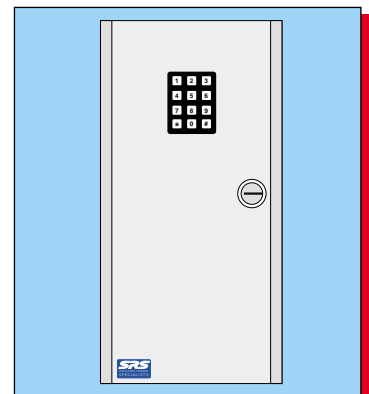

SRS SA99

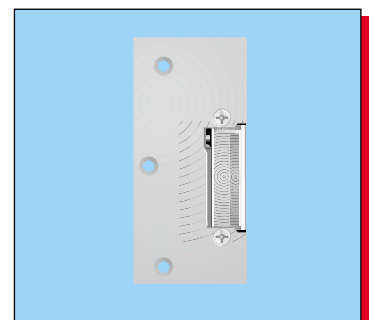

LOCK RELEASE

