

TAC MicroNet BACnet™ Unitary Controller

The TAC I/A Series® MicroNet™ BACnet™ Unitary Controller is an interoperable controller with native BACnet MS/TP communications support. The controller features Sensor Link (S-Link) support, LED status and output indication, screw terminal blocks, as well as a panel mount sub-base with removable electronics module.

When programmed using WorkPlace Tech Tool, the Unitary controller provides a wide range of control strategies for packaged rooftop, heat pump, fan coil, unit ventilator, and similar applications.

The TAC MicroNet BACnet Unitary Controller can function either in a standalone mode or as part of a BACnet building automation system (BAS) network.

Table-1 Model Chart.

Model	Inputs and Outputs		
	UI	UO	DO (Triac)
MNB-300	6	3	6

- The TAC MicroNet BACnet Unitary Controller's sequence of operation and BACnet image are fully programmable using WorkPlace Tech Tool. The controllers can be applied to all common unitary HVAC applications.
- Capability to function in standalone mode or as part of a TAC I/A Series building automation network.
- Integral MS/TP jack for direct connection of PC with WorkPlace Tech Tool.
- Removable electronics module mates with panel-mounted subbase.
- Optional plenum-rated enclosure.
- DIP switch addressable.
- Service pin button for BACnet "I am" message broadcast.
- Removable terminals for power and communications to facilitate commissioning.
- Isolated RS-485 transceiver for MS/TP communications.
- MS/TP baud rate selection from 9.6 up to 76.8 kbaud.
- LED indication of MS/TP communication activity, controller status, and UO and DO state.
- Firmware upgradeable over the network.

Communications

BACnet Networks

The TAC MicroNet BACnet Unitary Controller incorporates an isolated RS-485 transceiver for BACnet MS/TP communications at 9.6 up to 76.8 kbaud using standard MS/TP wiring methods. Up to 128 TAC MicroNet BACnet controllers can be connected to an MS/TP sub-net without repeaters.

S-Link

The Sensor Link (S-Link) communications wiring provides power and a communication interface for one MN-Sx TAC I/A Series MicroNet sensor. The various MN-Sx sensors can provide room temperature, room humidity, setpoint adjustment, and occupancy override. This connection uses two-wire, unshielded cable and is not polarity sensitive. Maximum S-Link bus length is 200 ft (61 m).

BACnet Compliance

BACnet Application Specific Controller (B-ASC).

Options

MNB-300-ENC	Wall-mount enclosure
S-Link Sensors	Temperature and humidity wall sensors with digital communication
TSMN Series	Room temperature sensors



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve, or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BI.

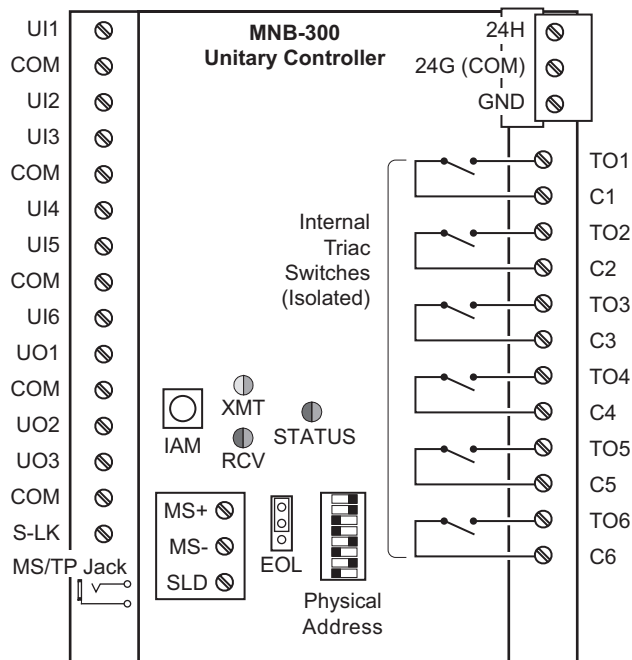


Figure-1 Unitary Controller Terminals.

SPECIFICATIONS

HARDWARE SPECIFICATIONS

Dimensions

3-15/16 H x 7 W x 2-3/16 D in
(100 x 178 x 56 mm).

Enclosure

Optional enclosure conforms to NEMA-1. Meets UL 94-5V flammability ratings for plenum application use.

Mounting

Panel mount.

Power Supply Input

20.4 to 30 Vac, 50/60 Hz.

Power Consumption

16 VA at 24 Vac.

AGENCY LISTINGS

US

UL 916, File #E9429 Category PAZX
FCC Part 15, Class A.

Canadian

UL Listed to Canadian Safety Standards
(CAN/CSA 22.2).

Australian

Meets requirements to bear the C-Tick
Mark.

BTL Listed

B-ASC

European Community

EMC Directive 89/336/EEC
EN61326

AMBIENT LIMITS

Operating Temperature

-40 to 140 °F (-40 to 60 °C).

Shipping and Storage Temperature

-40 to 160 °F (-40 to 71 °C).

Humidity

5 to 95% non-condensing.

WIRING TERMINALS (FIGURE-1)

I/O Points

Fixed Screw terminals; up to two AWG
#14 (2.08 mm²) or smaller wires.

Power and MS/TP

Removable screw terminals; single AWG
#14 (2.08 mm²) wire or up to two AWG
#18 (0.823 mm²) or smaller wires.

INPUTS FROM MN-SX TAC MICRONET™ SENSOR

Space Temperature

32 to 122 °F (0 to 50 °C).

Space Humidity

5 to 95% RH, non-condensing.

Local Setpoint

Adjustable within limits set by
application programming tool.

Override Pushbutton

For standalone occupancy control or
occupancy override.

Fan Operation and Speed Mode

On/off, speed (low/medium/high), or
auto.

System Mode

Heat, cool, off, or auto.

Emergency Heat

Enable or disable.

UNIVERSAL INPUTS (6)

Universal Input characteristics are
software-configured to respond to one
of the following input types:

10 k ohm Thermistor with 11 k ohm Shunt Resistor

Sensor operating range -40 to 250 °F
(-40 to 121 °C), TAC model TSMN-
57011-850, TS-5700-850 series, or
equivalent.

1 k ohm Balco

-40 to 250 °F (-40 to 121 °C), TAC
model TSMN-81011, TS-8000 series, or
equivalent.

1 k ohm Platinum

-40 to 240 °F (-40 to 116 °C), TAC
model TSMN-58011, TS-5800 series, or
equivalent.

1 k ohm Resistive

0 to 1500 ohms.

10 k ohm Resistive

0 to 10.5 k ohms.

Analog Voltage

Range 0 to 5 Vdc.

Analog Current

Range 0 to 20 mA, requires external
250 ohm shunt resistor (AD-8969-202).

Digital

Dry switched contact; detection of
closed switch requires less than 300
ohm resistance; detection of open
switch requires more than 1.5 k ohms.

Standard Pulse Input (UI1-UI6)

Minimum Rate

1 pulse per 4 minutes.

Maximum Rate

1 pulse per second.

Fast Pulse Input (UI1)

Minimum Rate

1 pulse per 4 minutes.

Maximum Rate

10 pulses per second.

DIGITAL OUTPUTS – TRIAC (6)

12 VA at 24 Vac, 50/60 Hz, each output
individually isolated.

UNIVERSAL OUTPUTS (3)

0 to 20 mA

Output load from 80 to 550 ohms.

0 to 10 V

With external 500 ohms, 1/2 W, 1%
resistor.

Capable of Driving Functional Devices RIBUI1C Relay

UO configured for 0 to 20 mAdc, no
external resistor.

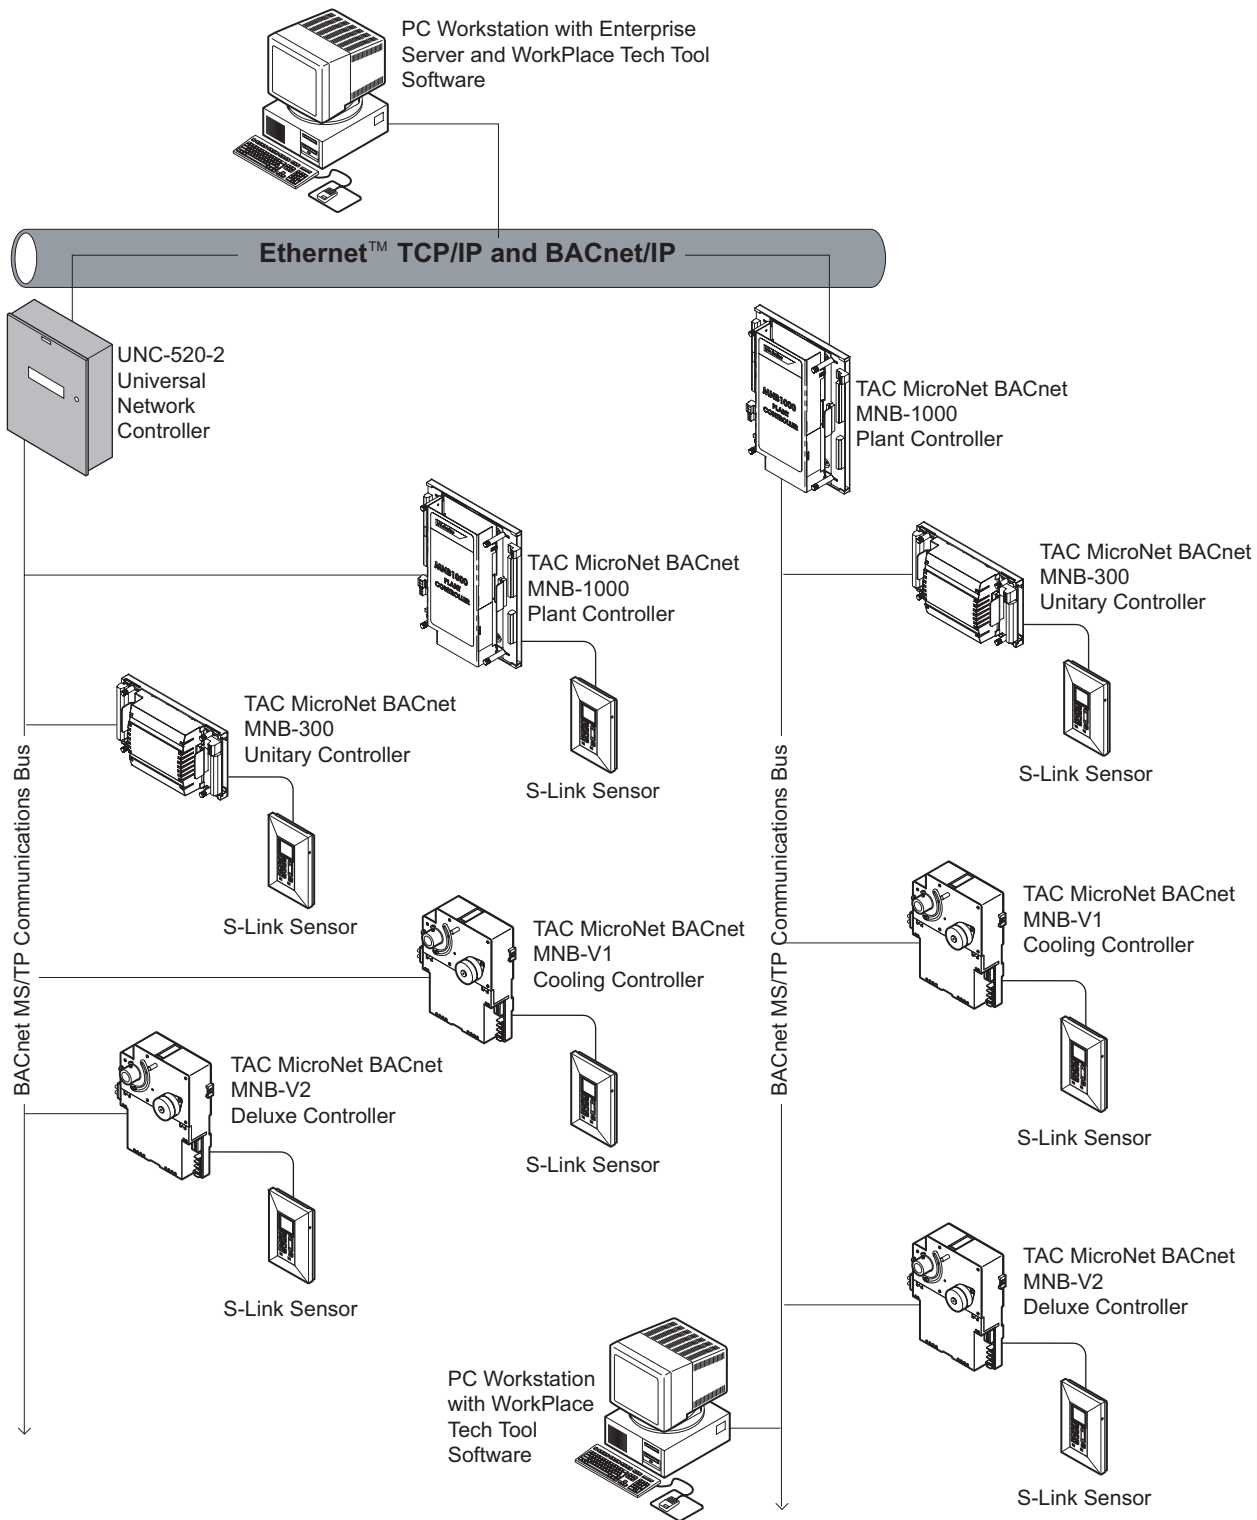


Figure-2 TAC I/A Series BACnet Topology.

Copyright © 2006, TAC
 All brand names, trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice. All rights reserved.

TAC
 1354 Clifford Avenue
 PO Box 2940
 Loves Park, IL 61132-2940

www.tac.com

Distributed, manufactured, and sold by TAC. I/A Series trademarks are owned by Invensys Systems, Inc. and are used on this product under master license from Invensys. Invensys does not manufacture this product or provide any product warranty or support. For service, support, and warranty information, contact TAC at 1-888-444-1311.

F-27339-1

