

Benefits

- Straightforward deployment
- Rack-mount appliance
- Easy configuration
- GIS assisted operation
- Web services and mobility



S-VMX Lite is delivered in real estate saving 1U rack server.

Powerful performance in a single unit

S-VMX Lite is a concept of delivering fully professional security application in a single unit, but yet with the powerful performance and real estate friendly size.

S-VMX Lite is a starter product for you in preparation for a system that is planned to grow bigger. This product is an optimum choice for an outlying location that will become part of a network in the future, but right now requires a stand-alone system.

A safe investment

As well as being a recorder for video streams encoded by Teleste encoders, also supported are a wide variety of third party IP and megapixel cameras. Teleste S-VMX Lite readily applies itself into any IP network.

With S-VMX United feature, multiple S-VMX Lite units can be interconnected. This scenario preserves autonomy for your local system while providing central monitoring capabilities at operational center.


The complete surveillance suite

S-VMX Lite is, to all intents and purposes, a surveillance monitoring, recording, storage and analysis suite.

S-VMX Lite is targeted for small camera count and multi-site installations. It can accommodate up to 16 cameras with support for one week 24/7 recording of live standard definition H.264 video. The retention time will scale with frame rate and/or resolution.

It simply delivers everything you need in a single 1U compact rack-mount server.

S-VMX United

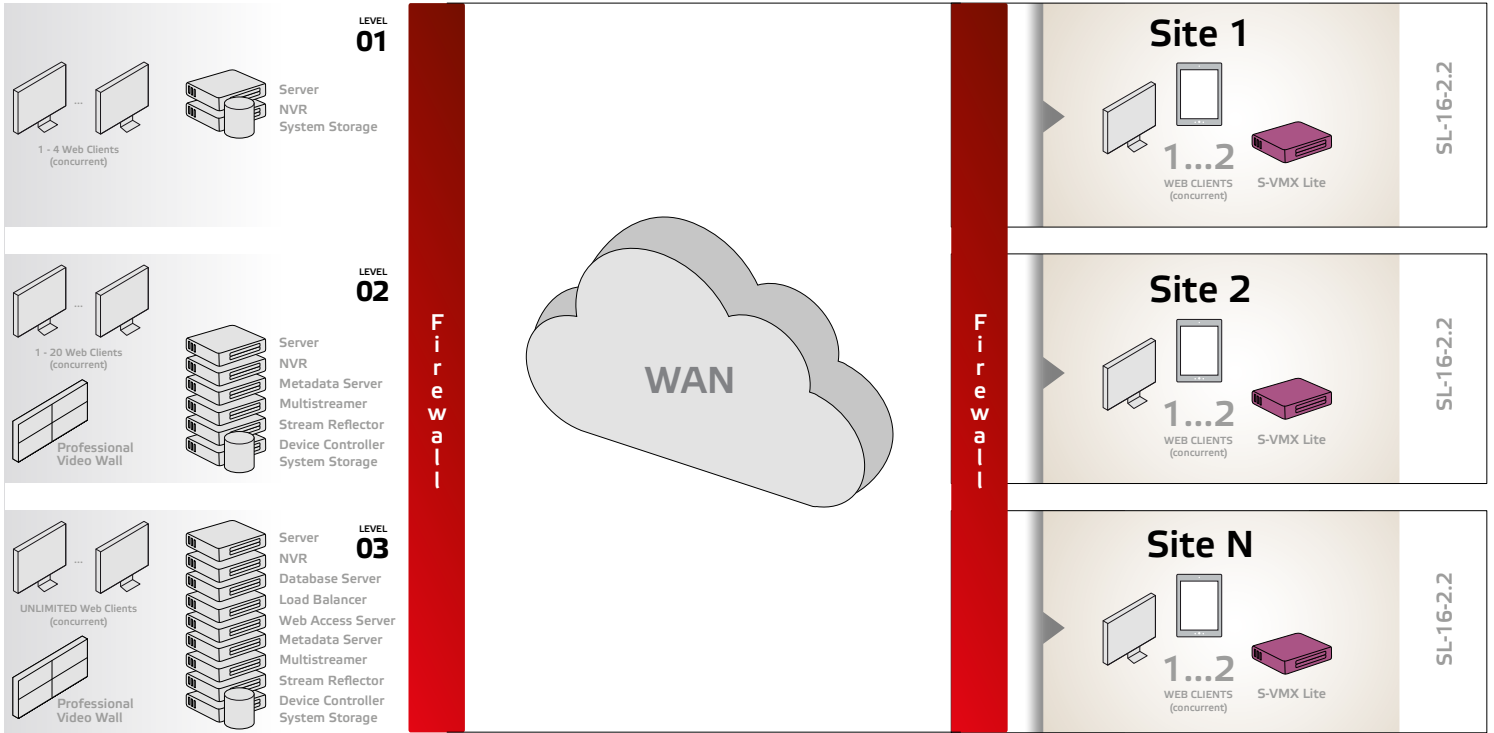

Technical specifications (Typical values unless otherwise stated)

Video	General
Encoding formats: H.264, MPEG-4, MPEG-2, MJPEG	Operating temperature range: +10...+35°C (50...95°F)
Streaming: Multicast, unicast	Storage temperature: -40...+65°C (-40...149°F)
Storage: 3520GB	Relative humidity: 20...80%
Software	Weight: 8.05kg (17.76lbs) Non-condensing Max.
Operating system: Microsoft Windows Server 2008	Dimensions:
Application: S-VMX Lite	
Hardware (*80GB partition for OS and application)	
Chassis: 1U rack server VHD200 series	
Processor: E3-1200 family	
Memory: 8 GB RAM	
Graphic adapter: VGA	
HDD*: 2 x 2TB	
Network: 2 x 10/100/1000Base-T	
Optical drive: 16 x DVD ±R/W	
RAID support: No RAID	
Power supply: 1 x 250W	
Heat dissipation: 1040 BTU/hr Based on PSU max wattage	

Ordering codes (Suite 2.2)

Ordering Code	Description	Capacity
SL-16 - 2.2	16 Channel S-VMX Lite 2.2	4TB

Hardware services ordering codes

VSD031	VHD200 series HW, on-site diagnosis service for 3 years
VSD041	VHD200 series HW, on-site diagnosis service for 4 years
VSD051	VHD200 series HW, on-site diagnosis service for 5 years
VSD032	VHD200 series HW, data protection service for 3 years
VSD042	VHD200 series HW, data protection service for 4 years
VSD052	VHD200 series HW, data protection service for 5 years
VSD240	VHD200 series HW warranty extension from 3 years to 4 years
VSD250	VHD200 series HW warranty extension from 3 years to 5 years
VSD260	VHD200 series HW warranty extension from 3 years to 6 years