



Scan the QR code or link to the address below to find out about our range of products and other support information.

<https://www.tm-readers.com/products.htm>

Overview

The RXQRK is designed to match the family of RX Series® card readers, and will blend seamlessly with existing installations of Third Millennium advanced access control readers.

This unit operates as a dual function assembly combining a secure multi-technology RFID reader, together with a QR scanner offering convenience-oriented applications and access.

The reader also features an RGB illuminated keypad, offering the addition security of PIN entry.

Designed to fit directly to a plain wall surface, or a standard flush mount single gang UK or EU electrical back box, the RXQR series are quick and easy to install.



Mechanical

Dimensions	117 x 87 x 32 mm (4.6 x 3.4 x 1.3 inches)
Housing	Moulded polycarbonate
Mounting	Suitable plain surface
Fixing	3.5mm diameter (UK / EU electrical back box)

Environmental

Environmental	RFID READER
Operating temp'	-35°C to +66°C
Humidity	85±5% at 30±2°C (86±3°F)
Ingress	IP67
Impact	IK10
Flammability	UL94V-0


Electrical

Electrical	RFID READER
Voltage	see table below
Current	see table below
Data Voltage	Rest >4Vdc / Active <1Vdc
Data output	see table below
Indication	1 RGB LED + RGB LED illuminated keypad
Sounder	Integral speaker
Termination	screw terminal connection block



READER MODEL	Frequency	Current mA	Voltage Vdc	Technology	Keypad output	Optical tamper	Wiegand Clock & Data	OSDP
RXQRK	13.56 MHz 125 kHz 2.4 GHz ○	100	10 - 16	MIFARE®DESFire® LEGIC® + ECP 2.0 + 125kHz	4 bit	•	•	•

○ - optional

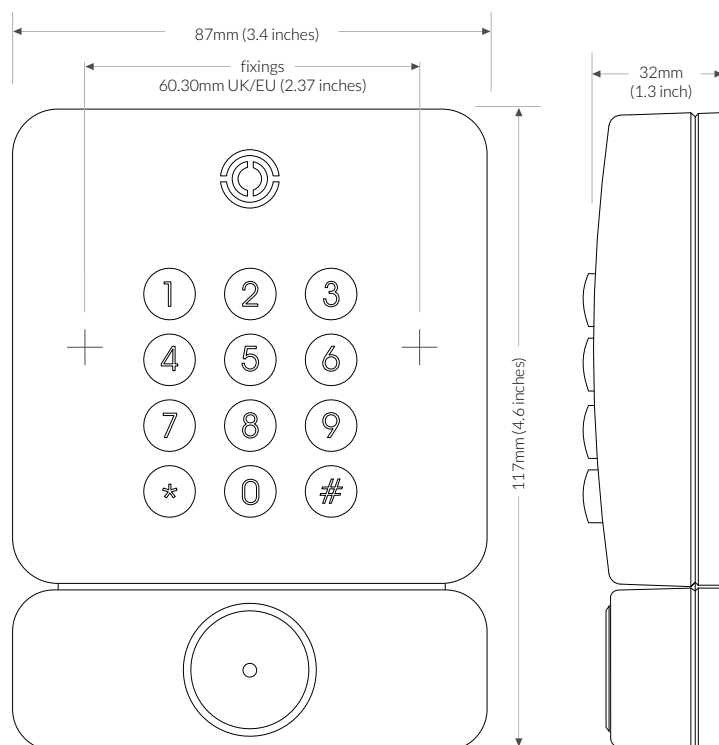

The RXQRK boasts multiple technologies embedded in the RFID reader hardware and firmware, including an Apple Certified ECP 2.0 integration for Apple Access passes.

Also included is a 13.56MHz MIFARE®DESFire® platform, having state-of-the-art security and privacy along with the full complement of LEGIC® 13.56MHz contactless smart technology, with its tightly integrated LEGIC RF Standard. In addition, the reader can also be used for 125kHz access control systems, including other widely used 125kHz technologies.

The QR reader scanner offers a convenience-oriented applications and access facility, integrated into the function of the RFID reader.

Key features

- Multi-technology (RFID READER)
- UK design and manufacture
- Black high gloss finish
- Slim profile
- RGB LED
- RGB LED illuminated keypad
- Fully encapsulated electronics (RFID READER)
- PIN authentication
- Optical tamper switch (see table above)
- Wide range of output formats
- Read range up to 10cm (4 inches)

PLUS

- QR Reader
- 1 year limited warranty



All copyrights © and trademarks ® / ™ are acknowledged and remain the property of their respective owners.

'MIFARE', 'MIFARE Classic' and 'MIFARE DESFire' are trademarks of NXP B.V.

RXSERIES® © Third Millennium Systems Ltd
registered in England & Wales No. 31199053

100-03062-RXQRK-G

E&OE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Third Millennium Systems Ltd.
18 / 19 Torfaen Business Centre
Panteg Way New Inn PONTYPOOL NP4 0LS United Kingdom

tel: +44 (0) 1495 751 992 web: www.tm-readers.com contact: info@tm-readers.com