


# NVR 21

## 8/16 IP Channel Network Video Recorder

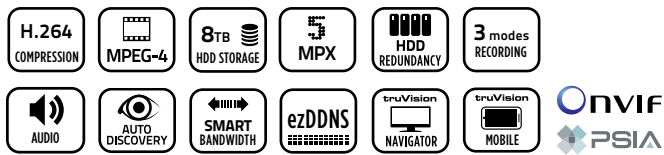

### OVERVIEW

The TruVision® NVR 21 (TVN 21) is a high-performance network video recorder designed to support video streams from IP video cameras. With a total of 40/80 Mbps of total bandwidth available, the TVN 21 can support up to 16 cameras at HD resolution in real-time (30fps) and many other configurations.\* Flexible bandwidth allocation per channel allows users to maximize recording performance. In addition to browser, software and mobile device management tools, the NVR 21's familiar front panel controls allow for easy operation.

IP camera support includes resolutions ranging from standard VGA to 5.0 megapixel, including Interlogix and third-party IP camera manufacturers.\*\* The NVR 21 also supports TruVision encoders for integrating existing analog cameras. Up to four internal hard disk drives may be configured for a total internal hard drive capacity of 2TB-8TB, making the TVN 21 ideal for extended storage or megapixel camera applications.

Recording options include continuous, motion, and alarm or combined scheduled recording modes. Motion recording utilizes an IP camera's built-in motion detection events, and alarms can be triggered from any of the 16 on-board alarm inputs or from alarm inputs that reside on the IP camera.

Software connectivity allows remote access to the recorder's full capabilities via Web browser or TruVision Navigator. TruVision Mobile also allows for remote device access. Configuration is quick and easy through startup wizards, IP device auto-discovery tools and ezDDNS service.

\*Reference table on page 2.  
\*\*Support from third-party IP cameras may vary.

### STANDARD FEATURES

#### Camera Support

- Up to 8/16 HD cameras (OnVIF/PSIA) in real time (30fps)
- TruVision and UltraView IP cameras from VGA through 5.0 megapixel (indoor and outdoor)
- H.264 Axis, Arecont, ACTi, Panasonic, Samsung, Sony and Vivitek (VGA/Megapixel)
- TruVision 4-, 8- and 16-channel encoders
- PTZ and dome camera control via mouse, front panel joystick and IR remote control

#### Recording Capabilities

- Continuous, motion or scheduled recording modes
- Event recording based upon native IP camera activity detection or via unit alarm input
- Video is stored in the native IP camera format
- Audio recording with capable IP cameras
- Redundant camera recording or independent storage groups for different durations
- Reverse playback
- Digital zoom on live and recorded video
- Text insertion via ProBridge for ATM/POS
- Watermarking for legal video authentication

#### Hardware

- Compact rack mountable – 1.5 RU
- Up to 8TB of plug-and-play internal, front accessible hard disk storage
- Support for external hard drive (eSATA)
- 16 on-board alarm inputs and 4 configurable alarm outputs
- Local USB archiving
- Composite, VGA and HDMI output for high-quality local viewing

# NVR 21

8/16 IP Channel Network Video Recorder

North America  
T 855-286-8889

Asia  
T 852-2907-8108

Australia  
T 61-3-9239-1200


Europe  
T 32-2-725-11-20

Latin America  
T 561-998-6114

## Specifications

Model	TVN-2108	TVN-2116	
<b>Video/ Audio Input</b>	IP Video Input	8-ch	16-ch
	Bi-directional Audio	1-ch, RCA (2.0 Vp-p, 1kΩ)	
<b>Video/ Audio Output</b>	Recording Resolution	5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC)	
	HDMI Output	1-ch, resolution: 1920 × 1080P /60Hz, 1920×1080P /50Hz, 1600 × 1200/60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	VGA Output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
	Audio Output	2-ch, RCA (Linear, 600Ω)	
	Playback Resolution	5MP /3MP /1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF	
	Synchronous Playback	8-ch	16-ch
<b>Hard Disk</b>	SATA	4 SATA interfaces	
	eSATA	1 eSATA interface	
	Capacity	2TB capacity for each HDD	
<b>External Interface</b>	Network Interface	2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces	
	Serial Interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (reserved)	
	USB Interface	3 × USB 2.0	
	Alarm Interface	16 Alarm In, 4 Alarm Out	
<b>General</b>	Power Supply	100 ~ 240 VAC, 6.3 A, 50 ~ 60 Hz	
	Consumption (without hard disk or DVD-R/W)	≤ 45 W	
	Working Temperature	-10° C ~+55° C (14° F~131° F)	
	Working Humidity	10% ~ 90%	
	Chassis	19-inch rack-mounted 1.5U chassis	
	Dimensions (W x D x H)	17.40 × 14.61 × 2.91 in. (442 × 371 × 74mm)	
	Weight (without hard disk or DVD-R/W)	≤ 8 Kg (17.64 lb)	

## Dimensional Diagram

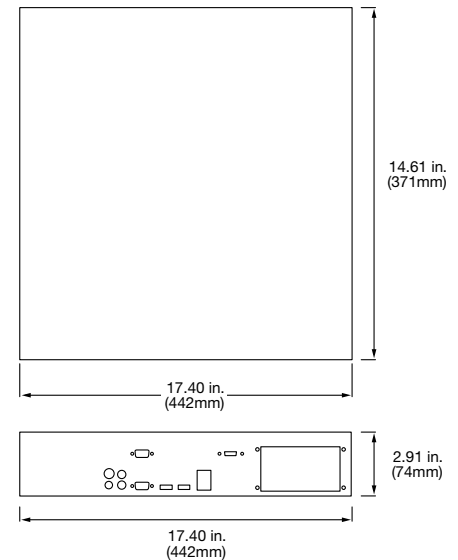

## Typical camera capacity configurations 8 Channels

Recording Resolution	Recording Frame Rate	Maximum Number of Interlogix IP Cameras	Recommended Days of Storage		
			10 Days	20 Days	30 Days
4CIF	15 fps	8	2TB	2TB	4TB
4CIF	25/30 fps	8	2TB	4TB	6TB
1.3 Mpx	10 fps	8	2TB	4TB	4TB
1.3 Mpx	16 fps	8	2TB	4TB	6TB
1.3 Mpx	25/30 fps	6	6TB		
2 Mpx	4 fps	8	2TB	4TB	6TB
2 Mpx	10 fps	8	4TB	8TB	
2 Mpx	25/30 fps	4	8TB		
3 Mpx	4 fps	8	4TB	8TB	
3 Mpx	12 fps	4	8TB		
5 Mpx	4 fps	7	6TB		
5 Mpx	6 fps	5	8TB		

Note: This is an indication only; results depend on cameras used and environment.

## Typical camera capacity configurations 16 Channels

Recording Resolution	Recording Frame Rate	Maximum Number of Interlogix IP Cameras	Recommended Days of Storage		
			10 Days	20 Days	30 Days
4CIF	15 fps	16	2TB	4TB	6TB
4CIF	25/30 fps	16	4TB	8TB	
1.3 Mpx	10 fps	16	4TB	6TB	8TB
1.3 Mpx	16 fps	16	4TB	8TB	
1.3 Mpx	25/30 fps	10	8TB		
2 Mpx	4 fps	16	4TB	8TB	
2 Mpx	10 fps	16	8TB		
2 Mpx	25/30 fps	8	8TB		
3 Mpx	4 fps	16	8TB		
3 Mpx	12 fps	10	8TB		
5 Mpx	4 fps	12	8TB		
5 Mpx	6 fps	10	8TB		

Note: This is an indication only; results depend on cameras used and environment.

## Ordering Information

<b>TVN-2108-2T</b>	TruVision NVR 21, 8 channels, 2TB Storage
<b>TVN-2108-4T</b>	TruVision NVR 21, 8 channels, 4TB Storage
<b>TVN-2108-8T</b>	TruVision NVR 21, 8 channels, 8TB Storage
<b>TVN-2116-2T</b>	TruVision NVR 21, 16 channels, 2TB Storage
<b>TVN-2116-4T</b>	TruVision NVR 21, 16 channels, 4TB Storage
<b>TVN-2116-8T</b>	TruVision NVR 21, 16 channels, 8TB Storage



interlogix.com

Specifications subject to change without notice.

© 2013 Interlogix.

All rights reserved.

Interlogix is part of UTC Climate, Controls & Security,  
a unit of United Technologies Corporation.

304-3658 2013/06 (74654)