

## 10bit digital video


Model:

VDS26400-T

VDS26400-R

### Description

The VDS26400 model provides for the simultaneous transmission of 64 video signals over one multimode or single mode optical fiber. The use of 10-bit video sampling provides extremely high video quality. The modules are available in either stand-alone or rack mount versions.

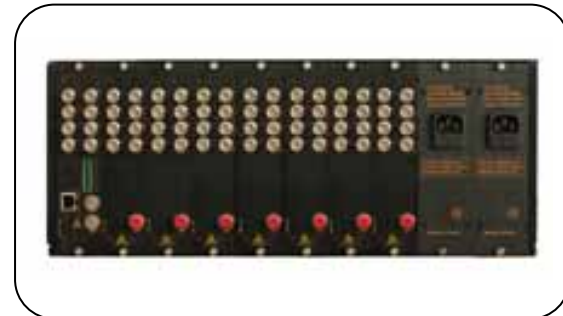

### CHANNEL AVAILABILITY

(Specify at time of order)

Number of Video  
Number of Audio  
Number of Data  
Number of Ethernet

Forward Path

0 to 64  
0 to 8  
0 to 8  
1

Reverse Path

0 to 8  
0 to 8  
1

### Features

- 64-channel video fiber optic transmitters and receivers
- 10 bit uncompressed digital video
- Video input with AGC (Automatic gain control)
- Anti-lightning chips on both Video and Data interface
- No In-field Electrical or Optical Adjustments Required
- NTSC, PAL, SECAM auto compatible
- Power, Video Presence, Data In/Out, and Fiber Status Indicating LED's to Monitor System Performance
- Hot swappable rack-mount cards
- 12 VDC or 24 VAC power supply
- Industry standard connectors

### Ordering information

Models	Wavelength	Fiber Type	MAX. Distance
VDS26400-MT VDS26400-MR	1310/1310nm	MM	2Km
VDS26400-MT VDS26400-MR	1310/1550nm	SM	20km (40/60/80km optional)

\*Optical transmission distance is limited to optical loss of the fiber and additional loss introduced by connectors, splices and patch panels. Distance can also be limited by fiber bandwidth. \*\*For 50/125 Fiber, subtract 4 dB from optical power budget.



## Specifications

### Video (X64)

Video format	PAL/ NTSC/SECAM
Video Input	0.5 ~ 2Vpp
Video Output	1Vp-p
Bandwidth (-3 dB)	8 MHz
Encoding	10bit
Differential gain	≤1%
Differential phase	≤1°
SNR	≥63 dB
Connector type	BNC 75Ω

### Power/Environmental

Stand-alone	6W
Rack-mount	6W
Power adaptor	220VAC to 12VDC/1A
Operating temperature	-40°C to +70°C
Relative humidity	< 95% (non-condensing)
MTBF	>100,000 Hrs

### Optical

Wavelengths	1310/1550nm
Fiber type	SM/MM
Budget (system)	12dB
Output power	-5 ~ -10dBm
Receiver Sensitivity	-24dBm
Connector type	FC (SC or ST optional)

### Mechanical

Stand-alone	260L x 205W x 45H
Dimensions (mm)	
Rack-mount	260L x 173W x 40H
Dimensions (mm)	
Stand-alone Weight (kg)	2.5
Rack-mount Weight (kg)	1.5

## System Design

