



# CMTC3215 TFT LCD Monitor




The CMTC3215 is part of the new wide screen monitor range of Siemens Security Products. It has been specifically designed for CCTV applications and is ideally suited for use with digital video recorders (DVR) and PC applications.

Its very high contrast ratio and brightness combined with a viewing angle of 178° H/V provides a clear and comfortable view. The monitor has 2 BNC video inputs, 2 loop-through outputs and further Video/PC inputs allowing a wide range of applications. The PiP/PbP as well as the configurable trigger functions extends the monitor to a real security monitor suitable for use in alarm events to switch display priority video.

A graphical OSD menu in 6 languages and a remote control make the monitor particularly user-friendly. The control buttons on the monitor can be locked, thereby ensuring that the settings cannot be changed by unauthorized persons.

- 81 cm (32") Wide Screen (16:9) Active Matrix TFT-LCD Panel
- 1366 x 768 resolution
- Contrast ratio 3000:1
- PiP (Picture-in-Picture) and PbP (Picture-by-Picture)
- Configurable trigger input
- Multi language support

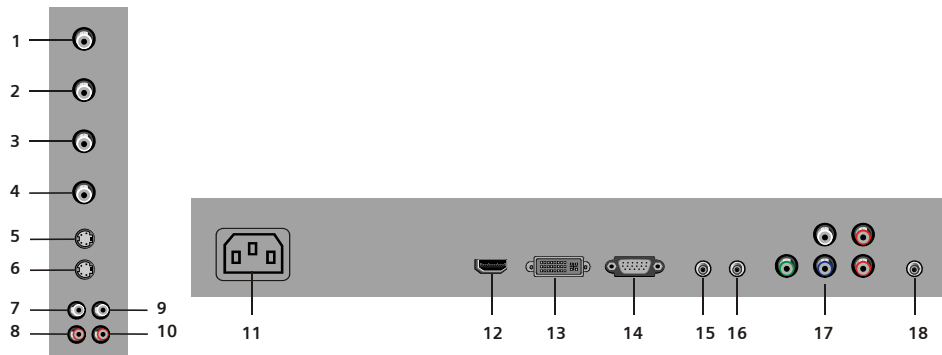

Legend

- |   |   |
|---|---|
| 1 Video 1 (AV1) input                   | 10 Video 1 (AV1) and S-Video audio output |
| 2 Video 1 (AV1) output                  | 11 AC Power input                         |
| 3 Video 2 (AV2) input                   | 12 HDMI input                             |
| 4 Video 2 (AV2) output                  | 13 DVI input                              |
| 5 S-Video (Y/C) input                   | 14 VGA (D-SUB) input                      |
| 6 S-Video (Y/C) output                  | 15 PC Stereo input                        |
| 7 Video 2 (AV2) audio input             | 16 Audio output (speaker)                 |
| 8 Video 2 (AV2) audio output            | 17 Component Y/Pb/Pr and sound L/R input  |
| 9 Video 1 (AV1) and S-Video audio input | 18 Trigger input                          |

## Functionalities

### 3D Comb filter

The comb filter provides the best possible analog video quality by separating the luminance and chrominance signal components.

### De-Interlacing

De-interlacing is the process of converting interlaced video (a sequence of fields) into a non-interlaced form (a sequence of frames).

### PiP (Picture-in-Picture)

This feature allows to show the images of a PC input and a video input at the same

time. Thereby a small picture will be shown at a selectable position in the main display area.

### PbP (Picture-by-Picture)

This feature allows to show the images of two video inputs at the same time side by side.

### Contrast ratio


The contrast ratio is a measure of the brightness range provided by a display system, defined as the ratio of the luminance of the brightest color (white) to that of the darkest color (black) that

the system is capable of producing.

### Brightness

This value measures the difference between the minimum and maximum brightness when looking at a white image (in percent). It is given in "candelar per square meter".

### Dimension drawings

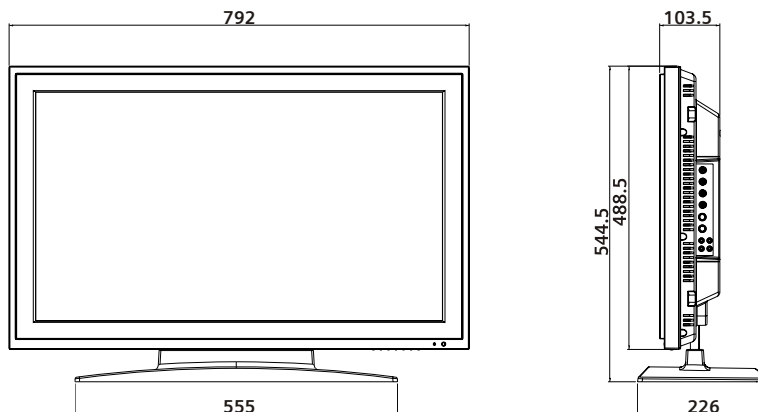

All dimensions in mm

## ■ Technical data

Screen diagonal	81 cm (32")
Power requirements	100 – 240 V AC, 50/60 Hz
Resolution (H x V)	1366 x 768 pixels
Pixel pitch (H x V)	0.51075 x 0.51075 mm
Contrast ratio	3000:1
Colour depth	16.7 Mio
Brightness	500 cd/m <sup>2</sup>
Angle of view	Horizontal: 178/178° Vertical: 178/178°
Response time	8 ms
Frequency	Horizontal: 31 – 64 kHz Vertical: 56 – 75 Hz
Video standard	PAL/NTSC (auto-sensing)
Video signal	RGB: 0.707 Vpp (75 Ω) NTSC: 1.0 Vpp (75 Ω)
Loudspeakers	2 speakers (2 x1 W)
Video inputs	2 FBAS (BNC, looped through) 1 S-Video (Y/C, looped through) 1 DVI-D 1 HDMI 1 RGB 1 Component (Y, Pb, Pr, Sound L/R)
Video outputs	2 FBAS (BNC, looped through)
Audio inputs	1 Audio In (chinch, R+L) for AV1, AV2 and S-Video 1 Stereo
Audio outputs	1 Stereo
Trigger input	1
Installation	VESA standard (4 x M4, 100 x 100 mm)
Active display area (H x V)	697 x 392 mm
Package dimensions (W x H x D)	875 x 280 x 635 mm
Dimensions (W x H x D)	792 x 544.5 x 226 mm (with base) 792 x 488.5 x 103.5 mm (no base)
Material	Plastic
Weight	Net weight: 21 kg Gross weight: 25 kg
Ambient temperature, storage	-20 to +60 °C
Ambient temperature, operation	0 – 40 °C
Relative humidity	80 %

## ■ Details for ordering

Type	Part no	Designation	Weight*
CMTC3215	S54573-C21-A1	81cm TFT CCTV Monitor 16:9	24.6 kg

\* Device incl. packing material, accessories that are included in the delivery, and documentation

Further products and accessories can be found in the Internet: [siemens.com/cctv](http://siemens.com/cctv) > Catalogue Downloads.



The information in this document contains general descriptions of technical options available, which do not always have to be present in individual cases. The required features should therefore be specified in each individual case at the time of closing the contract.

© Siemens AG • Document no. A6V10260821 • Edition: **24.06.2010** • Document version: 1.1

Siemens AG  
Siemensallee 84  
D-76187 Karlsruhe  
Tel. +49 721 595 1

[www.buildingtechnologies.siemens.com](http://www.buildingtechnologies.siemens.com)