




Magnetic Contacts MK-6000 Series




The new EN50131-2-6 approved magnetic contacts series MK-6000 offers selected products with the following features:

- Discreet and varied installation
- Constant sensitivity over a wide temperature range
- High reliability guaranteed by reed switch
- Variants with built-in resistors

MK-6400

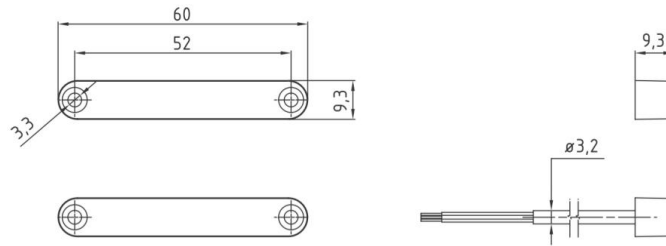

MK-6000-1

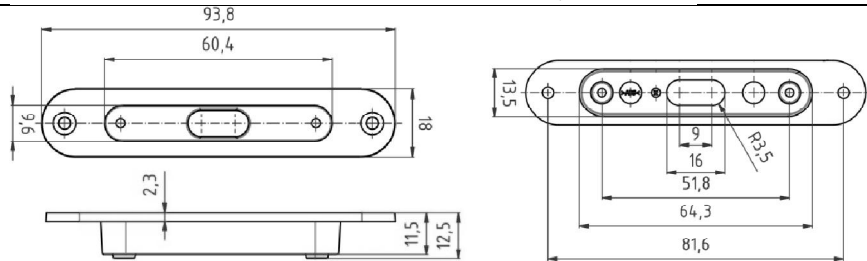

Technical data

Line contact	Single-pole NC contact
Switching voltage	≤ 100 V DC
Switching current	≤ 500mA
Contact capacity	≤ 6 W
Temperature range	-40°C to +70 °C
Housing material	PS
Housing protection	IP67
Environmental class VdS / EN	III / IIIA
Approvals (pending)	VdS, EN

Ordering Informations

Type	Order No.	Description	Weight
MK-6000-1	S54536-M109-A100	Plastic adapter	0.016 kg
MK-6400-5	S54536-F119-A100	Magnetic contact, 5 m cable	0.04 kg
MK-6400-10	S54536-F119-A200	Magnetic contact, 10 m cable	0.123 kg
MK-6400-5-2x4K7	S54536-F120-A100	Magnetic contact, 5 m cable, 2 x 4k7 ohm resistor	0.05 kg
MK-6400-5-2x16K2	S54536-F120-A200	Magnetic contact, 5 m cable, 2 x 16k2 ohm resistor	0.05 kg

The information in this document includes general descriptions of the technical possibilities, which need not be installed in each individual case. The desired performance characteristics must therefore be specified for the individual case when the contract is concluded.

© Siemens Building Technologies • Dokument Nr. A6V10427397 • Ausgabe: 13.02.2014 • Dokumentversion: 1.0