


RXO-5808R6

5.8GHZ

Designed with the harshest environments in mind, this robust receiver delivers high resolution, Real-Time video from a rugged IP-67 all-weather enclosure. Best suited in applications where trenching cable may not be possible, convenient or economical.

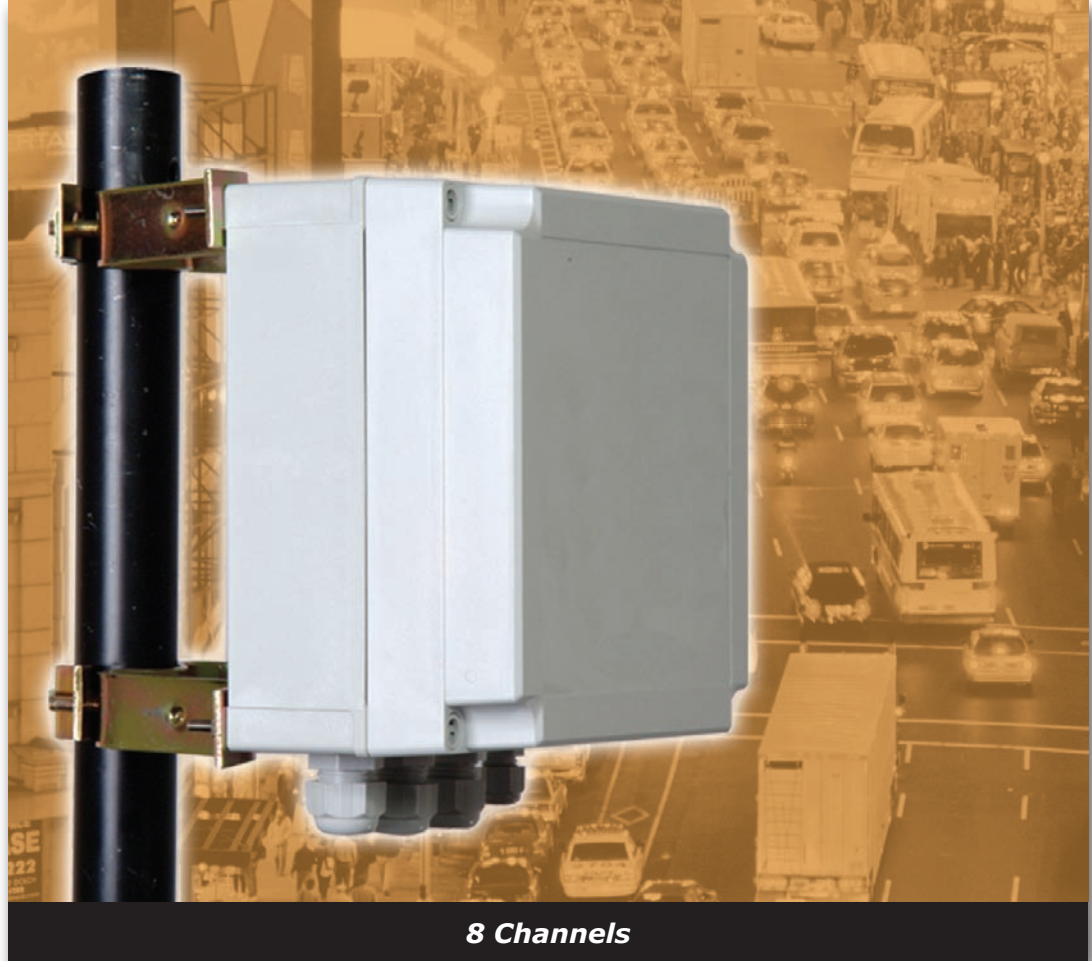

ADVANTAGES

- Easy to install and operate
- Delivers high resolution Real-Time video
- Not susceptible to interference from 2.4GHz 802.11 b/g networks
- 8 user selectable channels
- Unique Internal 7dB Embedded Antenna
- Rugged all weather IP-67 protective enclosure
- Perfect for commercial, industrial, scientific, law enforcement and government video security applications



APPLICATIONS INCLUDE



FREEWAYS



PARKING LOTS



AIRPORTS



CONSTRUCTION SITES



HARBOR



INDUSTRIAL

SPECIFICATIONS

| | |
|------------------------|---|
| OPERATING FREQUENCY | 5.725GHz – 5.875GHz; 8 User Selectable Channels |
| RECEIVER SENSITIVITY | -84 dBm |
| RANGE (LINE-OF-SIGHT) | Depends on Optional Transmitter & Antenna |
| RECEIVER ANTENNA TYPE | 7dB Internal Removable Directional Patch |
| VIDEO FORMAT | NTSC or PAL |
| VIDEO CONNECTOR | BNC Female @ 75 Ohms 1 Volt P-P |
| AUDIO CONNECTOR | One Left and One Right BNC Female @ 600 Ohms 1 Volt P-P |
| TEMPERATURE RANGE | -40°F to +170°F |
| POWER SUPPLY INCLUDED | 9 – 14 VDC Polarity Protected |
| CURRENT CONSUMPTION | 330 mA @ 12 VDC |
| DIMENSIONS | 7.0" x 7.0" x 4.5" |
| MOUNTING BRACKETS | Included –Universal Wall / Pole Mount |
| WEIGHT | 0.9 kg or 32 oz |
| FCC / IC / CE APPROVED | Yes |

KIT INCLUDES

- ALL WEATHER RECEIVER
- OPERATING INSTRUCTIONS
- 12VDC POWER SUPPLY
- UNIVERSAL MOUNTING BRACKET
- INTERNAL 7dB ANTENNA
- ONE YEAR LIMITED WARRANTY

