


*The T-2400 Directional series is the smallest and most versatile transmitter of it's kind on the market today. With standard features including four user selectable channels, audio line level and alarm input, the multi-channel series is perfectly suited for building into custom mini camera housings and in applications where only battery use is possible.*



### ADVANTAGES

- Four user selectable channels
- Easy to use – “Plug & Play”
- Standard features include audio line level and alarm input
- Eliminates the need for cabling or trenching
- Outperforms 900MHz for use with color or high resolution cameras
- Outperforms 900MHz for outdoor long range transmission
- One Year Limited Warranty



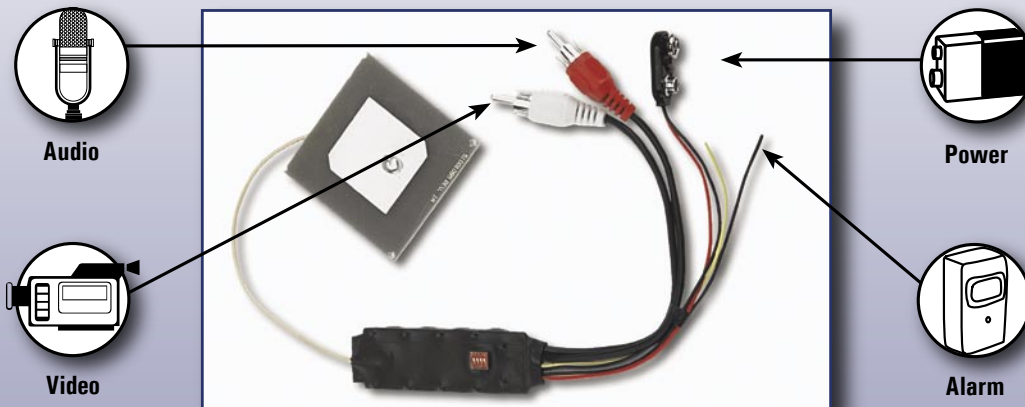

SPECIFICATIONS	T-2440	T-2480
Operating Frequency ( 4 Channels)	2.4108 – 2.4728 GHz	2.4108 – 2.4728 GHz
Radiated Power	50 mV/m @ 3m	100 mW
Range (line-of-sight)	<b>Depends on Optional Receiver and Antenna</b>	
Antenna Type	Directional	
Video Format	NTSC or PAL	
Video Connector	RCA male @ 75 OHMS– 1 Volt Peak to Peak	
Audio Connector	RCA male @ 600 OHMS– 1 Volt Peak to Peak	
Alarm Input Connector	Bare leads – Norm Closed	
Temperature Range	-30°F – 170°F	
Power Supply Included	8 – 14 VDC – Polarity Protected	
Current Consumption:	45 mA @ 12VDC	95 mA @ 12VDC
Dimensions	1" x 2.5" x 0.25"	
Weight	37g or 1.3oz	
FCC / IC Approved	YES	Part 90 Available

## KIT INCLUDES

- Mini Video Transmitter
- 12 VDC power supply
- AA battery pack holder
- One Year Limited Warranty



*Requires Optional Receiver and Not Included*