

These Remote Switchers provide switching between up to 16 cameras and 8 monitors. They may be used stand-alone, or controlled remotely by a VK-series Keyboard, Computer or other device.

16 Cameras, 2 Monitors

On-Screen Text
16 Camera inputs
2 Monitor Outputs
Remote Control
Built-In Keyboard Option

Order Codes:

VS-1602 (no keyboard)

VS-1602K (keyboard)




16 Cameras, 4 Monitors

On-Screen Text
16 camera Inputs
4 Monitor Outputs
Remote Control
Built-In Keyboard Option

Order Codes:

VS-1604 (no keyboard)

VS-1604K (keyboard)

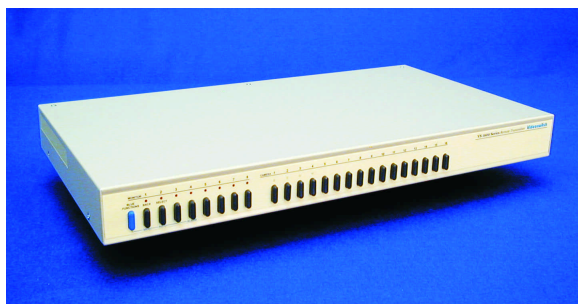


16 Cameras, 8 Monitors

On-Screen Text
16 camera Inputs
8 Monitor Outputs
Remote Control
Built-In Keyboard Option

Order Codes:

VS-1608 (no keyboard)

VS-1608K (keyboard)

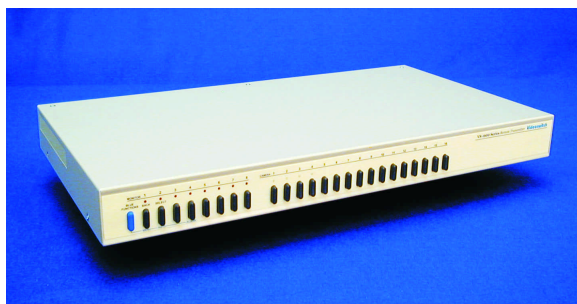

- Easy Set Up
- Very High Image Quality
- 5 Year Warranty
- On-Screen Text for Camera Identification
- On-Screen Text for Screen Title
- Simple Menu Setup
- Auto Sequencing
- Random Sequencing
- Independent Dwell Time for each Camera
- Alarm Inputs
- Alarm Relay Contacts
- Individual Programmable Alarm Polarities
- Programmable Alarm Hold Time
- Programmable Alarm Sequence Time
- Programmable Alarm Relay Hold Time
- Removable Camera Termination
- Robust Metal Case
- Powered via External 12Vdc Linear Supply
- Designed, Manufactured and Supported in the UK

VS-1600 Series Technical Data

On-Screen Text

Camera Titles	16 Alpha-Numeric Characters (individually set for each camera)
Screen Title	16 Alpha-Numeric Characters
Time & Date	Real Time Clock with Battery Backup
Text Format	Plain White Text with optional Black Border or Black Boxed Background

Video Inputs/Outputs

Input/Outputs	1V pk-pk
Camera Termination	75Ω or High Impedance (programmed via menu)

Auto Sequencing

Modes	Sequential/Random
Dwell Times	1 to 99 seconds (individually set for camera and each monitor)
Power-Up Mode	Sequencing may set to be <i>on</i> or <i>off</i> following power-up

Alarms

Inputs	Contacts (10kΩ pull-up to 5V on each input)
Polarity	Normally Open/Closed (individually programmable for each input)
Actions on Alarm	Pull-up Full-screen & Auto-Sequence
Alarm Hold Time	0 - 99 seconds
Alarm Sequence Time	0 - 99 seconds

Relay

Relay Contact Rating	24Vdc 500mA max, Change-over Contacts
Hold Time	0 - 99 seconds

Remote Control

Interface	RS232/RS485/RS422, 9600 baud, 8 bits no parity or 7 data bits & odd parity
Compatibility	Videoswitch VXP-4 Protocol

Power

DC Input	12Vdc 0.4Amps max
Mains Adaptor	230Vac Input (115V option), 10W max

Dimensions

Unit	438 x 284 x 52 mm
Power Supply	65 x 50 x 50 mm
Packaged	582 x 450 x 120 mm

Weight

Unit	3.5 Kg
Power Supply	0.3 Kg
Packaged	4.3 Kg

Environmental

Humidity (non-condensing)	5 to 95%
Operating Temperature	0 to 40° C
Storage Temperature	-20 to 60° C

Included Accessories

- User/Installation Manual
- Power Supply
- Alarm Connector
- Data Connector

Optional Accessories

- Rack-mount Ears
- Remote Keyboards
- Rugby Clock Receiver
- Remote Control Software
- VXP-4 Communications Manual

These remote switchers are available with and without built-in keyboards. As such, they may be used as stand-alone switchers, or as part of remotely controlled systems, employing one or more of our VK-series keyboards. Alternatively, they can be controlled directly by computer and via remote transmission systems.

Up to 8 monitors are supported and 16 cameras. Versions catering for 32 cameras will also be available.

Typical Configuration

