

#### DS23.6SDI

Panel Type	23.6" (16:9) LED Monitor Metal Cased
Maximum Resolution	1920(H) x 1080(V)
Active Display Area	521.28 ( H ) × 293.22 ( V ) mm
Pixel Pitch	0.2715 (H) x 0.2715 (V) mm
Bezel Thickness	16.7mm
Contrast Ratio	1000:1
Brightness	300 cd/ m <sup>2</sup>
Response Time	1.5 - 3.5ms
Viewing Angle	U/D: 80° / 80°, L/R: 85° / 85°
Display Colours	16.7 M
Video Synchronization	Yes
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V)
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatibility	Multi-Standard for NTSC / PAL
Aspect Ratio	16: 9 With 4:3 Function
VGA Auto Frequency correction	Yes
Speaker	Multimedia Speakers
Number of Speakers	Right x 1, Left x 1, 2.5W
Sound Demodulation	Stereo, Audio
Mute	Yes
Work Humidity	20 % - 70 %
Work Temperature	-10 to 50 °C
Volume +/- Power On/Off	Yes



#### POWER

Power Supply	12VDC, 3amp
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	<35W in 'ON' mode

#### IN/OUT INTERFACE

Video Interface	HDMI x1 VGA x 1, BNC x 2 In/ BNC x 2 Out, SDI In / SDI Out
Audio Interface	Audio In x 1
Power Interface	AC In x 1
Termination	75 Ohms (Automatic termination)
Safety & EMC Certification	CE / FCC / ROHS
Vesa Standard Mount	100 x 100mm
Stand Type	Desktop
Colour	Black
Button Position	Front, Right
Packing Dimension	640 (W) x 500 (H) x 165 (D) mm
NET Weight	7.5Kg
GROSS Weight	8.9Kg

#### OSD CONTROLS


Contrast, Brightness, OSD Duration, H-Position, V-Position, Language, Picture Mode, Colour Temp, Scale, Saturation, Backlight, Sleep Timer, Sound, Memory Recall, 3D NR, MPEG NR, PIP, POP

#### OSD LANGUAGE

English, French, German, Spanish, Italian, Russian, Polish and Portuguese

#### ACCESSORIES

Power Supply / Kettle Lead /VGA Cable / Audio Cable / User Manual / Remote Control

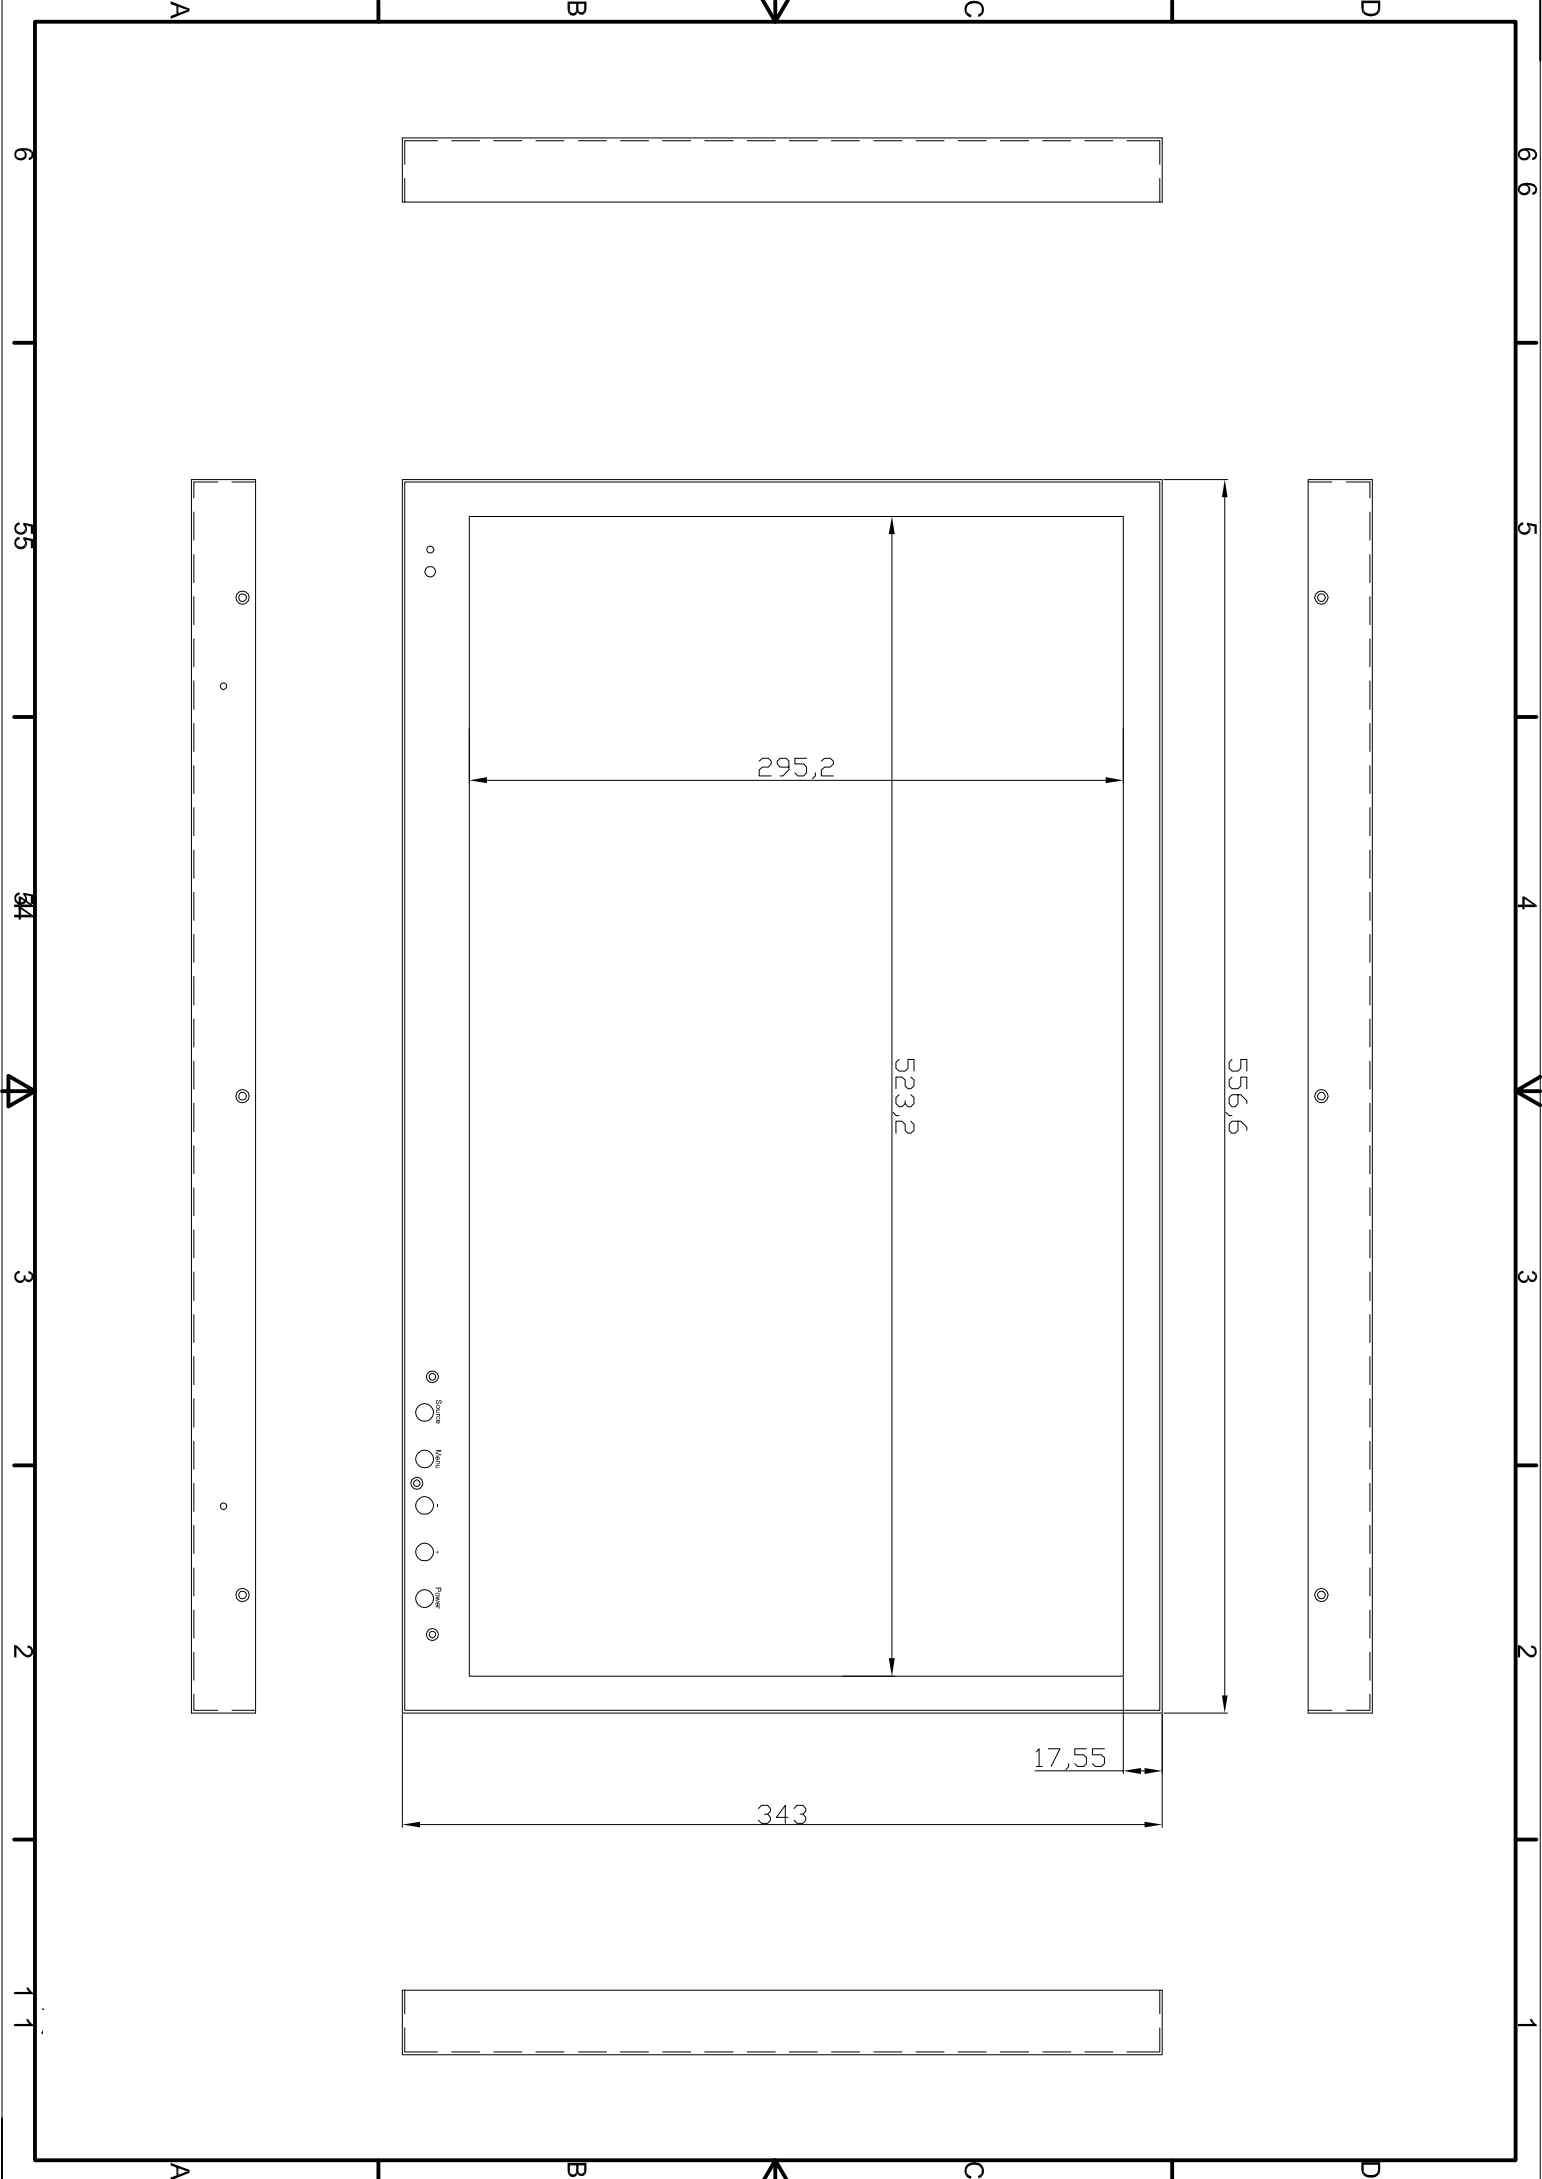

A

B

C

D

6

6

55

5

34

4

3

3

2

2

1

1

⊙

◦

⊙

◦

⊙

◦

◦

⊙

⊙

⊙

⊙

⊙

⊙

⊙

⊙

⊙

⊙

295,2

523,2

556,5

343

17,55

A

B

C

D

