

## Coaxial Video Distribution Units

Driving several devices from a single video signal



**C1002VD**  
1 in 2 out Coaxial Video Distributor  
ABS 42x72x46 mm 65 gm 12 Vdc/24 Vac 40 mA




**C1004VD**  
1 in 4 out Coaxial Video Distributor  
ABS 138x86x30 mm 115 gm 12Vdc/24 Vac 100mA



**C1008VD**  
1 in 8 out Coaxial Video Distributor  
Metal case 133x87x44 mm 450 gm 12Vdc 150 mA



**C4008VD**  
4 in 8 out Coaxial Video Distributor  
Metal Case 133x145x44 mm 680 gm 12 Vdc 150 mA

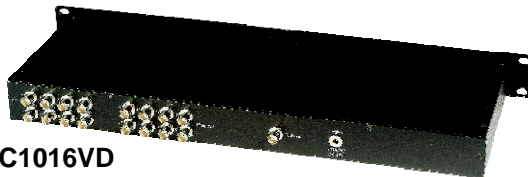

**C1016VD**  
1 in 16 out Coaxial Video Distributor  
Metal Case 483x189x44 mm 1U 2050 gm 12 Vdc 250 mA



**C8016VD**  
8 in 16 out Coaxial Video Distributor  
Metal Case 483x195x44 mm 1U 2270 gm 12 Vdc/24 Vac 250 mA



**C1664VD**  
16 in 64 out Coaxial Video Distributor  
Metal Case 483x110x85 mm 2U 2980 gm 12 Vdc 800 mA

### Features:

Wide bandwidth amplifiers

75 ohm BNC connectors

Enables video signal to be sent to multiple devices without distortion

No set up required

Receiving devices, (monitors, VCR, DVR, Matrix, etc.), can be sited up to 250 meters away

Power supply included

### Video Distributor Characteristics

Video input level 0.8 - 1.2 Vpp, 75 ohm BNC connector

Video output level 1 Vpp, 75 ohm BNC connector

Video bandwidth 10 Hz - 10 MHz



RoHS  
compliant