



IB836B-HT/-EHT



IB836B-HF3/-EHF3

Bullet Network Camera



2MP · WDR · SNV · 30M IR · P-iris · Remote Focus · 3DNR · Smart IR · Video Rotation · IP66 · IK10 · Cable Management · Extreme Weather · Defog

VIVOTEK's IB836B-H is a series of stylish, bullet-style network cameras designed for diverse outdoor applications and offering a complete range of options. Equipped with a 2MP Full HD sensor enabling viewing resolution of 1920x1080 at a smooth 30 fps, the IB836B-H series is an all-in-one outdoor camera capable of capturing high quality and high resolution video up to 2 Megapixel with WDR and SNV technology, no matter whether in high contrast or in low light environments.

Increasing its flexibility, VIVOTEK's IB836B-H series provides options for both fixed focus used for simple operation without electrical power, and remote focus with built-in stepping motors and P-iris to provide precise adjustment remotely.

To meet the demands of outdoor and harsh applications, VIVOTEK's IB836B-H series is also armed with IP66-rated housing to help the camera body withstand rain, dust and high pressure water jets from any direction, while its IK10-rated housing provides robust protection against acts of vandalism or other impacts.


Finally, a wide operating temperature range further enhances the IB836B-H's performance and reliability in extremely cold or hot weather, even when using PoE. When choosing VIVOTEK IB836B-H series, customers will be offered four options: the IB836B-HF3, IB836B-EHF3, IB836B-HT, and IB836B-EHT. Different options can be chosen based on the requirements of your application, such as focusing method or operating environment temperature.

Key Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- 2.8 ~ 12 mm, Vari-focal, Remote Focus, P-iris Lens (IB836B-HT/-EHT)
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 30 Meters
- Smart IR Technology to Avoid Overexposure
- WDR for Unparalleled Visibility in Extremely Bright and Dark Environments
- SNV (Supreme Night Visibility) for Low Light Conditions
- 3D Noise Reduction
- Video Rotation for Corridor View
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Extreme Weather Support with PoE (IB836B-EHF3/-EHT)
- VIVOTEK VCA (Video Content Analysis) Support



VIVOTEK SNV Camera - Show you true colors at night

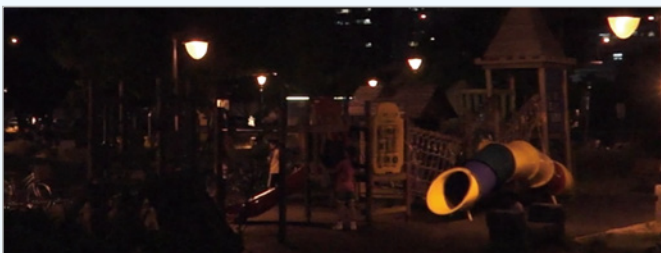

Ordinary Camera



Extreme Weather



Station



Entrance



Street


Technical Specifications

| | |
|--------------------------------------|---|
| Model | IB836B-HT: Vari-focal, P-iris, Remote Focus IB836B-EHT: Vari-focal, P-iris, Remote Focus, Extreme Weather IB836B-HF3: Fixed-focal IB836B-EHF3: Fixed-focal, Extreme Weather |
| System Information | |
| CPU | Multimedia SoC (System-on-Chip) |
| Flash | 1Gb |
| RAM | 2Gb |
| Camera Features | |
| Image Sensor | 1/2.8" Progressive CMOS |
| Maximum Resolution | 1920x1080 (2MP) |
| Lens Type | Vari-focal, Remote Focus (IB836B-HT/-EHT) |
| Focal Length | IB836B-HT/-EHT: f = 2.8 ~ 12 mm IB836B-HF3/-EHF3: f = 3.6 mm |
| Aperture | IB836B-HT/-EHT: F1.8 ~ F2.85 IB836B-HF3/-EHF3: F2.1 |
| Auto-iris | P-iris (IB836B-HT/IB836B-EHT) |
| Field of View | IB836B-HT/-EHT: 39° ~ 92° (Horizontal) 22° ~ 49° (Vertical) 45° ~ 122° (Diagonal) IB836B-HF3/-EHF3: 83° (Horizontal) 53° (Vertical) 91° (Diagonal) |
| Shutter Time | 1/5 sec. to 1/32,000 sec. |
| WDR Technology | WDR |
| Day/Night | Removable IR-cut filter for day & night function |
| Minimum Illumination | IB836B-HT/-EHT: 0.03 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W) IB836B-HF3/-EHF3: 0.06 Lux @ F2.1 (Color) 0.001 Lux @ F2.1 (B/W) |
| Pan/tilt/zoom Functionalities | ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in) |
| IR Illuminators | Built-in IR illuminators, effective up to 30 meters with Smart IR IR LED*8 |
| On-board Storage | Slot type: SD/SDHC/SDXC card slot Seamless Recording |
| Video | |
| Compression | H.264 & MJPEG |
| Maximum Frame Rate | 30 fps @ 1920x1080 In both compression modes |
| Maximum Streams | 4 simultaneous streams |
| S/N Ratio | Above 58 dB |
| Dynamic Range | 100 dB |
| Video Streaming | Adjustable resolution, quality and bitrate; Smart Stream |
| Image Settings | Adjustable image size, quality and bit rate, Time stamp, text overlay, flip & mirror, Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, Scheduled profile settings, 3D noise reduction, video rotation, defog |
| Audio | |
| Audio Capability | Two-way Audio (full duplex) |
| Compression | G.711, G.726 |
| Interface | External microphone input Audio output |
| Network | |
| Users | Live viewing for up to 10 clients |
| Protocols | IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS |
| Interface | 10Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard Cat. 5e & Cat. 6 cables which are compliant with the 3P/ETL standard. |
| ONVIF | Supported, specification available at www.onvif.org |
| Intelligent Video | |

* Available per project request

| | |
|-------------------------------|--|
| Video Motion Detection | Five-window video motion detection |
| VCA* | Line crossing detection, field detection, loitering detection |
| Alarm and Event | |
| Alarm Triggers | Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection |
| Alarm Events | Event notification using digital output, HTTP, SMTP, FTP and NAS server, SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card |
| General | |
| Smart Focus System | IB836B-HT/-EHT: Remote Focus |
| Connectors | RJ-45 cable connector for Network/PoE connection Audio input Audio output DC 12V power input Digital input*1 Digital output*1 |
| LED Indicator | System power and status indicator |
| Power Input | DC 12V IB836B-HT/-HF3: IEEE 802.3af/at PoE Class 0 IB836B-EHT/-EHF3: IEEE 802.3at PoE Class 4 |
| Power Consumption | IB836B-HT: Max. 13 W IB836B-EHT/-EHF3: Max. 25 W (Heater on) IB836B-HF3: Max. 9 W |
| Dimensions | Ø 88 x 293 mm |
| Weight | Net: 1264 g |
| Casing | Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing (Casing only) |
| Safety Certifications | IB836B-HT/-EHT: CE, LVD, FCC Class A, VCCI, C-Tick, UL IB836B-HF3/-EHF3: CE, LVD, FCC Class A, VCCI, C-Tick, |
| Operating Temperature | IB836B-HT/-HF3: Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) IB836B-EHT/-EHF3: Starting Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F) |
| Warranty | IB836B-HT/-EHT: 36 months IB836B-HF3/-EHF3: 24 months |
| System Requirements | |
| Operating System | Microsoft Windows 7/8/Vista/XP/2000 |
| Web Browser | Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7/8/9/10/11 |
| Other Players | VLC: 1.1.11 or above Quicktime: 7 or above |
| Included Accessories | |
| CD | User's manual, quick installation guide, Installation Wizard 2 |
| Others | Quick installation guide, warranty card, sun shield, wall mount bracket, alignment sticker/desiccant bag, waterproof connector, screw pack |

Dimensions

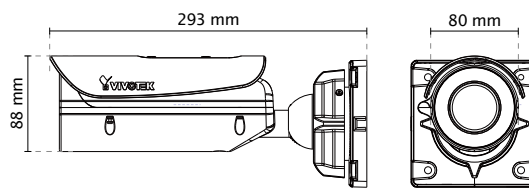

Compatible Accessories

Mounting Kits



AM-714
Junction Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Ver. 15