

Industrial SFP Transceiver Modules




Technical Specifications

Model Name	SFP-1000-MM85-X51	SFP-1000-MM13-021
Data Rate Gigabit	1.25G	1.25G
Center Wave Length	850 nm	1310 nm
Laser Type	VCSEL	Febry-Perot
Tx (dBm)	-3~-10	-5~-15
Rx (dBm)	-20	-20
Voltage	3.3V	3.3V
Transmission Range	62.5/125um, up to 0.5km	9/125μm, up to 2km
Fiber Type (MMF / SMF)	MMF	MMF
Connector	LC	LC
Dimensions	55.9mm (L) x 14.69mm (W) x 12.39mm (H)	55.9mm (L) x 14.69mm (W) x 12.39mm (H)
Operating Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	-40°C ~ 85°C (-40°F ~ 185°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	-40°C ~ 85°C (-40°F ~ 185°F)
Humidity	5 ~ 90% (non-condensing)	5 ~ 90% (non-condensing)
MSA Compliant	Yes	Yes
Certifications	IEC 825, EN60825-1, FDA 21 CFR 1040.10 and 1040.11	IEC 825, EN60825-1, FDA 21 CFR 1040.10 and 1040.11

Model Name	SFP-1000-SM13-101	SFP-1000-SM13-401
Data Rate Gigabit	1.25G	1.25G
Center Wave Length	1310 nm	1310 nm
Laser Type	Febry-Perot	Febry-Perot
Tx (dBm)	-3~-9	-3~-3
Rx (dBm)	-21	-24
Voltage	3.3V	3.3V
Transmission Range	9/125μm, up to 10km	9/125μm, up to 40km
Fiber Type (MMF / SMF)	SMF	SMF
Connector	LC	LC
Dimensions	55.9mm (L) x 14.69mm (W) x 12.39mm (H)	55.9mm (L) x 14.69mm (W) x 12.39mm (H)
Operating Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	-40°C ~ 85°C (-40°F ~ 185°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)	-40°C ~ 85°C (-40°F ~ 185°F)
Humidity	5 ~ 90% (non-condensing)	5 ~ 90% (non-condensing)
MSA Compliant	Yes	Yes
Certifications	IEC 825, EN60825-1, FDA 21 CFR 1040.10 and 1040.11	IEC 825, EN60825-1, FDA 21 CFR 1040.10 and 1040.11

Dimensions

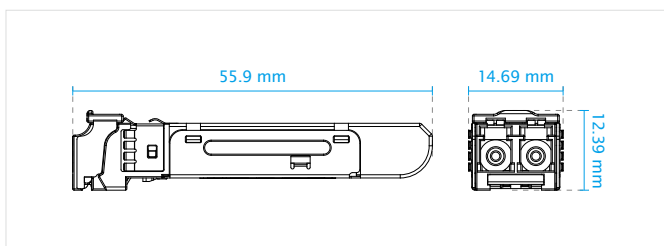

Application



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 4