
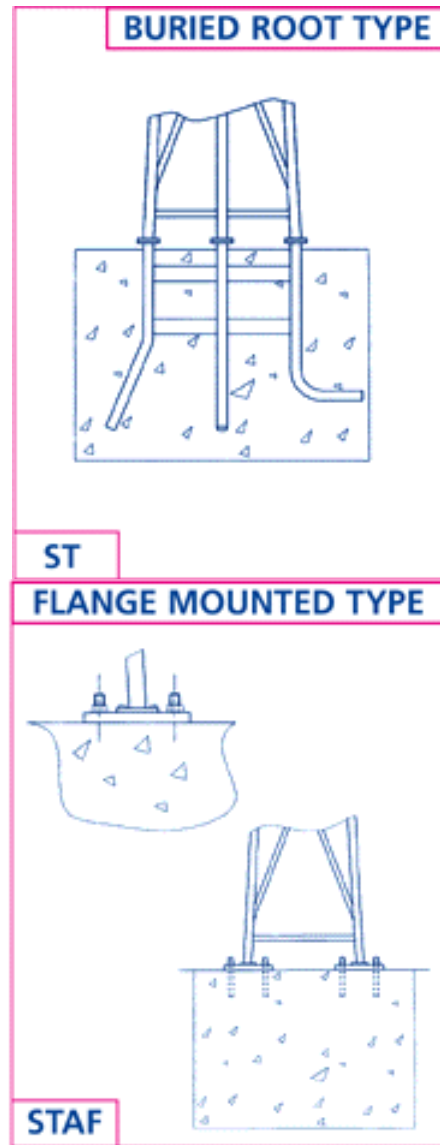


WEC FIXED TOWERS

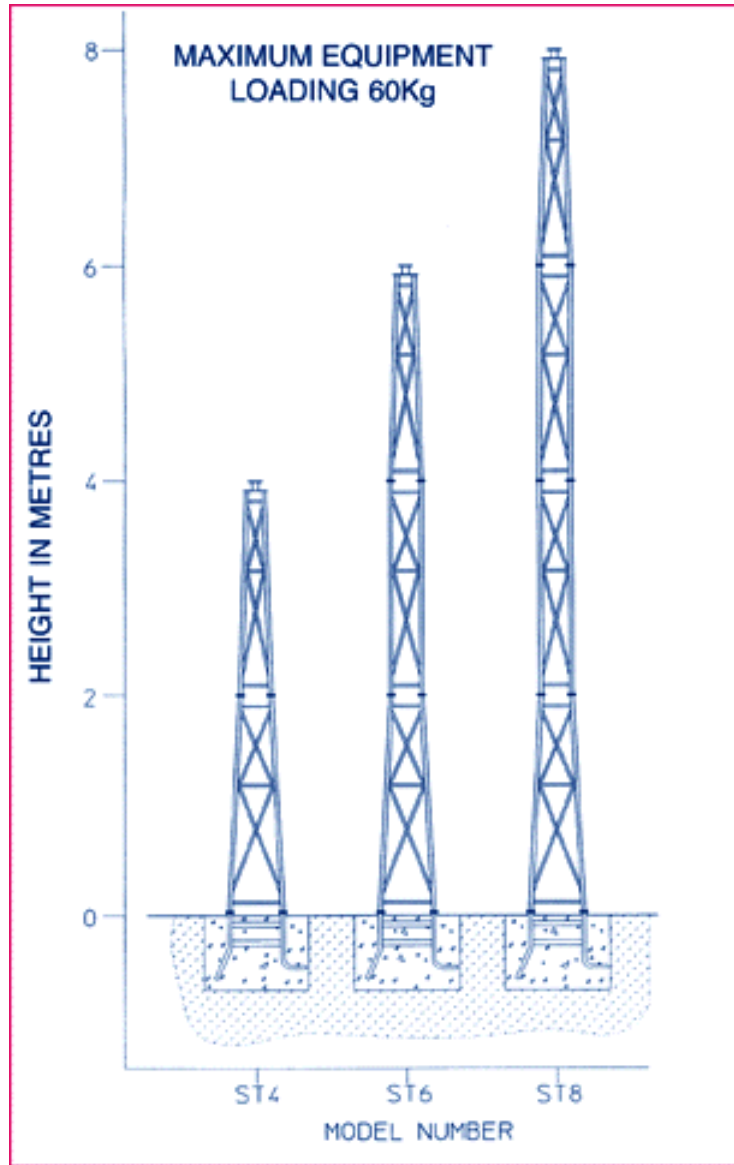

General Specification	Standards Applicable	Product Reference
-----------------------	----------------------	-------------------

Standard pan & tilt fixing of 101.6 PCD

Standard 75mm upstand

Fixings included for telemetry receiver

Built in cable entry & exit points

Two metre sectional construction

Equipment loading of up to 75kg

Buried root or flange mounted versions available

Standard heights available from 4 to 8 metres

Compatible with WEC adaptors & accessories

Structural steelwork
BS4848, BS4360

General steelwork
BS1449, BS1387, BS EN 10025

Galvanising
Hot dipped to BS729:1971

Fasteners
BS3692, BS4190, DIN931, DIN934

Welding & Procedures
comply with BS5135:1984

Wind loadings
in accordance with CP3 Chapter V Part 2 : 1972

Quality procedures
ISO9002 Certification No. GB3368

Paint finishes
BS4800 & RAL colour ranges

Buried root type

ST4*

ST6*

ST8*

Flange mounted type

ST4AF*

ST6AF*

ST8AF*

* Stock items

