

A decorative graphic consisting of several overlapping, semi-transparent triangles in shades of gray, forming a larger, abstract geometric shape.

SEE BETTER, ACT FASTER
HIKVISION MONITORS IN
COMMAND CENTER

01 High Definition Solution For Small Control Room

Flexible and cost-effective solution for small control room with up to 4K resolution and 24/7 operation.



Product List



28", 50", 55" (4K)

Resolution: 3840×2160@60Hz
VGA/BNC, USB, Speaker
HDMI 2.0 (4K@60Hz) support
Metal casing, VESA support
24/7 Operation

Model

DS-D5028UC, DS-D5050UC,
DS-D5055UL-B

32", 40", 43", 49", 55"


Resolution: 1920×1080
HDMI/VGA/BNC, USB, Speaker
Metal casing, VESA support
24/7 Operation

Model

DS-D5032FC-A, DS-D5032FL, DS-D5040FC,
DS-D5043FC, DS-D5049FL, DS-D5055FL

■ Up To 4K UHD

An ultra-high definition offers not only the most exquisite image details for an optimal viewing experience, but also more workspace compared to 1080P to achieve better work efficiency.




1920 x 1080



3840 x 2160

■ Wide Viewing Angle

Up to 178° viewing angle allows you to capture every detail.

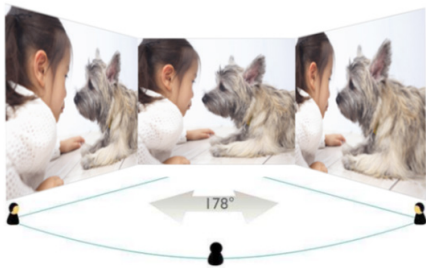

■ Industrial Grade PID LCD Panel

PID Panel delivers longer service life, making it perfect for the security environment with non-stop display service and reliable performance.



PID A+ Panel
24/7

■ iVMS Software and Flexible Keyboard

Free iVMS-4200 or licensed HikCentral, together with DS-1005KI keyboard, will provide the ideal solution to manage your security video and image in a quick and effective manner.



19", 22", 24"

Resolution: 1920×1080

HDMI/VGA

BNC(not QE series)

Plastic casing, VESA support


24/7 Operation

Model

DS-D5019QE-B, DS-D5022QE-B,
DS-D5022FC, DS-D5024FC

02 Video Wall Solution For Medium Control Room

Extensible video wall, along with the flexible decoder, can display images from more channels and provide a more advanced video management ability.

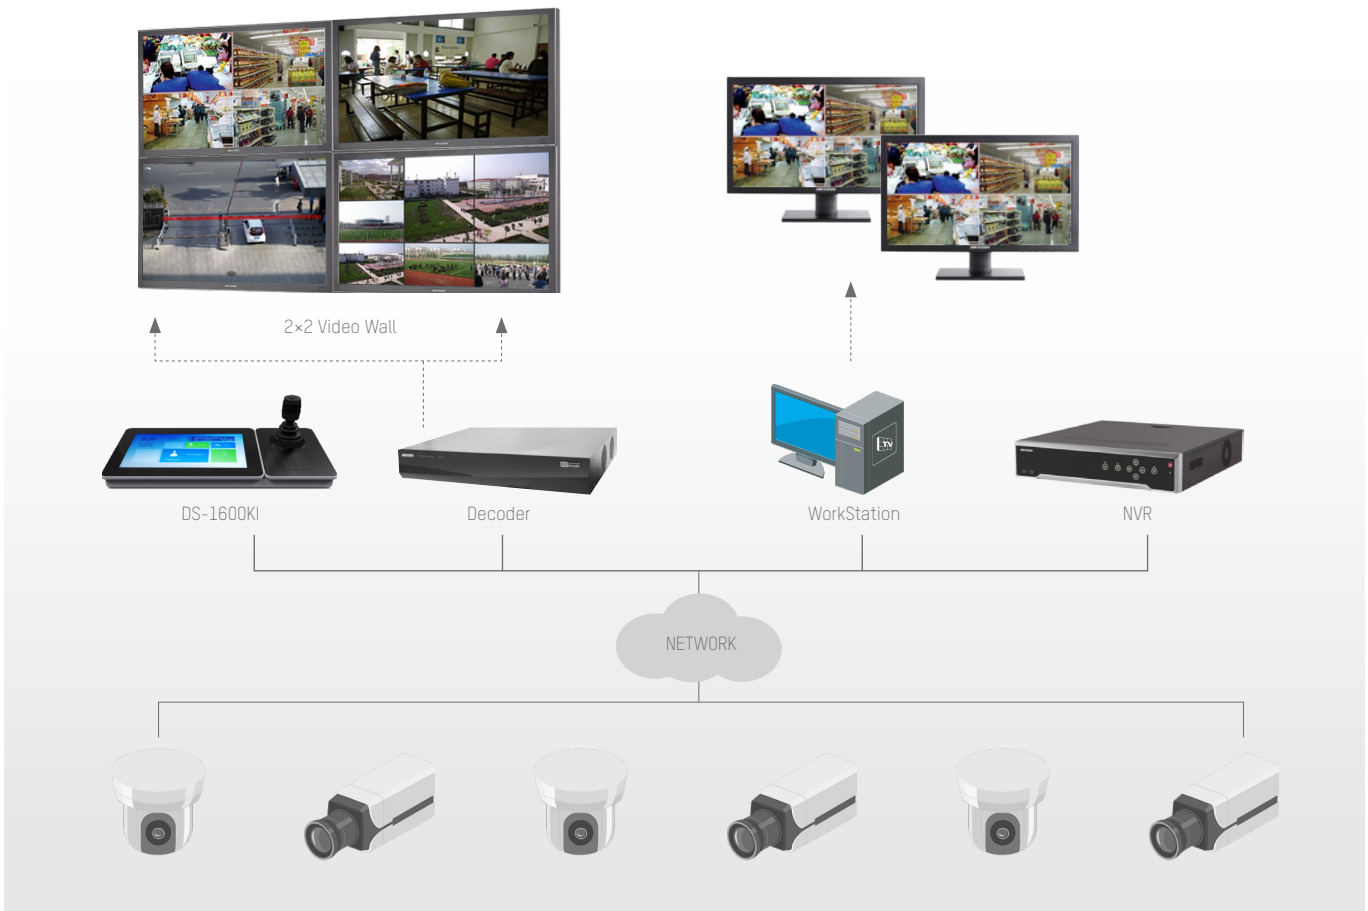

Product List




4K Decoder

HDMI/BNC output
Up to 4K @30Hz (Only for odd interface)
Decoding: Up to 16-ch 12MP or 128-ch 1080p
Up to 4x4 video wall control
Division, splicing, cross-window roaming
H.265, H.264+, H.264

Model

DS-6900UDI-T series

■ Easy to Install with VESA Wall Bracket

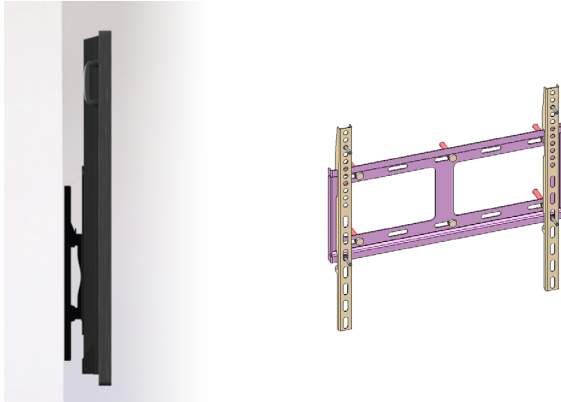

■ Longer Life Span



■ Strong Package Design

Bursting strength up to 2000Kpa. Edge Crush Test up to 1400N/m. Avoid any damage during transportation.



■ Windows Splicing and Division

Powerful decoding ability and flexible window management with the 4K decoder.



Network Keyboard

10.1" capacitive touch screen
 Detachable design for the touchscreen and joystick
 Wired and WiFi network connection
 2-ch 1080P decoding and up to 16-division window display
 PTZ control, setting and calling preset, patrol and pattern
 DVI/HDMI output to monitor

Model

DS-1600KI

03 Narrow Bezel Video Wall For High-End Control Room



Decoder

OR



Video Wall Controller

Product List



46", 55"

500 cd/m², 800 cd/m²
5.3mm, 3.5mm, 1.7mm
Input: VGA/DVI/BNC/HDMI/Ypbpr
Output: VGA/DVI/2*BNC

Model

DS-D2046NL-B, DS-D2046NL-C,
DS-D2046NH-C, DS-D2055NL-B/G,
DS-D2055NH-B/G


■ Ultra-narrow Bezel Design

World's slimmest bezel-to-bezel video wall provides you with an amazing viewing experience.



■ Daisy-Chain Display

Deliver high-quality mirrored contents to different locations, or build a multi-display, single-image video wall through simply connecting your media device to the screen via DVI. No splitters required.

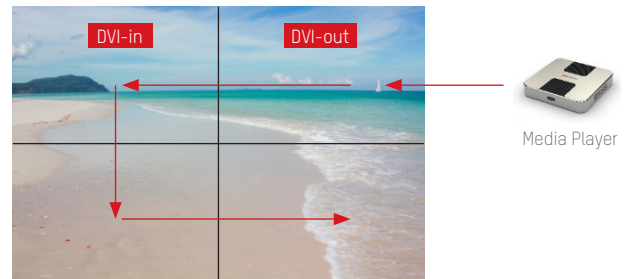

■ Client Software for Flexible Video Wall Management

Hikvision video wall management platform provides flexible and powerful functions, such as window roaming, opening, and division anywhere on screen.



Open a new window anywhere on screen
Max. 8 windows overlaid
Roaming windows by Click-and-drag



Video Wall Controller

4U/8U/13U casing option
Input: DVI/HDMI/SDI/Ypbpr/BNC/TVI/DP
Output: VGA/HDMI/DVI/SDI
Support decoding board
Windows roaming, opening, and division

Model

DS-C10S-S11/E, DS-C10S-S22/E,
DS-C10S-S41/E

Specification	Product	CCTV Economic Series (QE)		CCTV Professional Series (FC)				
Panel	Model Name	DS-D5019QE-B	DS-D5022QE-B	DS-D5022FC	DS-D5024FC	DS-D5032FC-A	DS-D5040FC	DS-D5043FC
	Screen Diagonal	18.5"	21.5"	21.5"	23.6"	32"	39.5"	42.5"
	Backlight	LED-Backlit TFT LCD						
	Resolution	1366×768	1920×1080					
	Aspect Ratio	16:9						
	Brightness (Typical) (cd/m²)	200	250	250	250	300	360	380
	Contrast Ratio (Typical)	600:1	1000:1	1000:1	1000:1	1000:1	5000:1	1200:1
	Viewing Angle (H/V)	90° / 65°	170° / 160°			178° / 178°		
Audio	Internal Speaker	N/A	N/A	×2, 2W	×2, 2W	×2, 2W	×2, 2W	×2, 3W
	Audio Input	N/A	N/A	×1	×1	×1	×1	×1
	Audio Output	N/A	N/A	×1	N/A	×1	×1	N/A
Input	VGA	×1	×1	×1	×1	×1	×1	×1
	HDMI	×1	×1	×1	×1	×1	×1	×1
	BNC	N/A	N/A	×1	×1	×1	×1	×1
	DVI	N/A	N/A	N/A	N/A	×1	×1	×1
	USB	N/A	N/A	×1	N/A	×1	×1	N/A
Output	BNC	N/A	N/A	×1	×1	×1	×1	N/A
Mechanical	Dimensions (W×H×D)	445×274×44mm	511×313×170mm	511×313×170mm	561×399×218mm	728×528×168mm	906×517×47mm	968×565×78mm
	Weight (Gross/Net)	3.5kg / 2.8kg	4.5kg / 3.3kg	4.6kg / 3.2kg	6kg / 5.1kg	9.2kg / 5.7kg	11kg / 8.5kg	10.6kg / 9.1kg
	Wall Mounting (VESA) (mm)	75×75mm	100×100mm	100×100mm	100×100mm	100×100mm	100×100mm	200×300mm
Power	Voltage	100V-240V, 50Hz / 60Hz		DC12V	100V-240V, 50Hz / 60Hz			
	Power Consumption (Maximum / Standby)	<25W / <0.5W	<30W / <0.4W	<30W / <0.5W	<30W / <0.5W	<45W / <0.5W	<60W / <0.5W	<65W / <1W
Environment	Operation Temperature	0°C ~ 40°C						
	Storage Temperature	-20°C ~ 55°C						
	Usage	24/7						
Accessory	Remote Control	N/A				×1		
	Power Cord	×1						
	VGA Cable (By Region)	N/A	N/A	N/A	×1	×1	×1	N/A
	HDMI Cable (By Region)	×1	×1	×1	N/A	×1	×1	N/A
	Base Bracket	×1					Optional	
	Wall Bracket	Optional						

Specification	Product	Industrial Series (FL)				PVM	4K Series		
Panel	Model Name	DS-D5032FL	DS-D5043FL	DS-D5049FL	DS-D5055FL	DS-D5032FL-C	DS-D5028UC	DS-D5050UC	DS-D5055UL-B
	Screen Diagonal	32"	43"	49"	55"	32"	28"	50"	55"
	Backlight	LED-Backlit TFT LCD							
	Resolution	1920×1080					3840×2160		
	Aspect Ratio	16:9							
	Brightness (Typical) (cd/m²)	400	400	450	380	400	300	300	500
	Contrast Ratio (Typical)	3000:1	1200:1	1100:1	1200:1	3000:1	1000:1	4000:1	1100:1
	Viewing Angle (H/V)	178° / 178°							
Audio	Internal Speaker	×2, 3W	×2, 3W	×2, 3W	×2, 3W	N/A	×2, 3W	×2, 8W	×2, 5W
	Audio Input	×1	×1	×1	×1	×1	×1	×1	×1
	Audio Output	×1	×1	×1	×1	×1	×1	×1	×1
Input	VGA	×1	×1	×1	×1	×1	×1	×1	×1
	HDMI	×1	×1	×1	×1	×1	×1	×2	×1 HDMI1.4, ×1 HDMI2.0
	BNC	×1	×1	×1	×1	N/A	N/A	×1	×1
	DVI	×1	×1	×1	×1	N/A	×1	×1	×1
	USB	×1	×1	×1	×1	×1	×2	×2	×1
Output	BNC	N/A	×1	N/A	N/A	N/A	N/A	N/A	×1
	LAN	N/A	N/A	N/A	N/A	×1	N/A	×1	N/A
Mechanical	Dimensions (W×H×D)	737×452 ×70mm	996×591 ×48mm	1141×677 ×69mm	1275×746 ×55mm	737×508 ×75mm	659×555 ×244mm	1123×649 ×77mm	1262.1×742.9 ×55.7mm
	Weight (Gross/Net)	19kg / 12kg	28kg / 20kg	32kg / 24.65kg	38.5kg / 33.73kg	22kg / 18kg	10.2kg / 7.8kg	12.35kg / 12kg	41kg / 35kg
	Wall Mounting (VESA) (mm)	200×200mm	400×200mm	300×200mm	400×300mm	200×200mm	100×100mm	400×200mm	300×200mm
Power	Voltage	100V~240V, 50Hz / 60Hz							
	Power Consumption (Maximum / Standby)	<60W / <1W	<100W / <1W	<60W / <1W	<80W / <1W	<65W / <0.5W	<70W / <0.5W	<117W / <0.5W	<100W / <1W
Environment	Operation Temperature	0°C ~ 40°C							
	Storage Temperature	-20°C ~ 55°C							
	Usage	24/7						18/7	24/7
Accessory	Remote Control	×1							
	Power Cord	×1							
	VGA Cable (By Region)	N/A							
	HDMI Cable (By Region)	N/A						×1	N/A
	Base Bracket	Optional					×1	Optional	
	Wall Bracket	Optional							

Specification	Product	1.7mm extreme-narrow bezel series		
Panel	Model Name	DS-D2046NH-E	DS-D2055NL-E/G	DS-D2055NH-E/G
	Screen Diagonal	46"	55"	
	Backlight	LED-Backlit TFT LCD		
	Panel	S-PVA		
	Resolution	1920×1080		
	Aspect Ratio	16:9		
	Brightness (Typical) (cd/m²)	700	500	700
	Contrast Ratio (Typical)	4500:1	4500:1	4500:1
	Response Time	6ms	8ms	8ms
	Viewing Angle (H/V)	178° / 178°		
Input	VGA	×1		
	HDMI	×1		
	BNC	×1		
	DVI	×1		
	YPbPr	×1		
	IR Jack	×1		
Output	VGA	×1		
	DVI	×1		
	BNC	×2		
Mechanical	Dimensions (W×H×D)	1020×574 ×116mm	1121×682 ×112mm	1211×682 ×112mm
	Weight (Net)	23kg	33kg	33kg
	Physical Seam	1.7mm		
Power	Voltage	90V-264V, 50Hz / 60Hz		
	Power Consumption	<139W	<192W	<192W
Environment	Operating Temperature	0°C~40°C		
	Life Expectancy	≥60,000 Hours		
	Usage	24/7		
Accessory	Remote Control	×1		
	Power Cord	×1		
	Cable	HDMI / DVI / VGA Optional		
	User's Manual	×1		
	Base Bracket	Optional		
	Wall Bracket	Optional		

Specification	Product	5.5 mm narrow bezel series	
Panel	Model Name	DS-D2046NL-B/Z	DS-D2046NL-B
	Screen Diagonal	46"	46"
	Backlight	LED-Backlit TFT LCD	
	Panel	S-PVA	
	Resolution	1920×1080	
	Aspect Ratio	16:9	
	Brightness (Typical) [cd/m²]	700	500
	Contrast Ratio (Typical)	4500:1	4500:1
	Response Time	6ms	8ms
	Viewing Angle (H/V)	178° / 178°	
Input	VGA	×1	
	HDMI	N/A	×1
	BNC	×1	
	DVI	×1	
	YPbPr	×1	
	IR Jack	×1	
Output	VGA	N/A	×1
	DVI	N/A	×1
	BNC	N/A	×2
Mechanical	Dimensions (W×H×D)	1020×574×116mm	1121×682×112mm
	Weight (Net)	23kg	33kg
	Physical Seam	5.5mm	
Power	Voltage	90V~264V, 50Hz / 60Hz	
	Power Consumption	<139W	<192W
Environment	Operating Temperature	0°C~40°C	
	Life Expectancy	≥60,000 Hours	
	Usage	24/7	
Accessory	Remote Control	×1	
	Power Cord	×1	
	Cable	HDMI / DVI / VGA Optional	
	User's Manual	×1	
	Base Bracket	Optional	
	Wall Bracket	Optional	

Specification	Product	3.5 mm ultra-narrow bezel series						
Panel	Model Name	DS-D2046NL-C	DS-D2046NH-C	DS-D2049NL-B	DS-D2055NL-B	DS-D2055NH-B	DS-D2055NL-B/G	DS-D2055NH-B/G
	Screen Diagonal	46"		49"	55"			
	Backlight	LED-Backlit TFT LCD						
	Panel	S-PVA						
	Resolution	1920×1080						
	Aspect Ratio	16:9						
	Brightness (Typical) [cd/m²]	500	800	500	500	800	500	700
	Contrast Ratio (Typical)	4500:1	4500:1	4000:1	4000:1	4000:1	4000:1	4000:1
	Response Time	8ms	8ms	8ms	8ms	8ms	8ms	8ms
	Viewing Angle (H / V)	178° / 178°						
Input	VGA	×1						
	HDMI	×1						
	BNC	×1						
	DVI	×1						
	YPbPr	×1						
	IR Jack	×1						
Output	VGA	×1						
	DVI	×1						
	BNC	×2						
Mechanical	Dimension (W×H×D)	1022×576×120mm	1022×576×120mm	1077×607×113mm	1213×684×113mm	1213×684×111mm	1213×684×113mm	1213×684×111mm
	Weight (Net)	23kg	23kg	28kg	33kg	33kg	33kg	33kg
	Physical Seam	3.5mm						
Power	Voltage	90V-264V, 50Hz / 60Hz						
	Power Consumption	<139W	<139W	<134W	<192W	<192W	<192W	<192W
Environment	Operation Temperature	0°C - 40°C						
	Working Life	≥60,000 Hours						
	Usage	24/7						
Accessory	Remote Control	×1						
	Power Cord	×1						
	Cable	HDMI / DVI / VGA Optional						
	User's Manual	×1						
	Base Bracket	Optional						
	Wall Bracket	Optional						

Specification	Product	Decoder					
	Model Name	DS-6901UDI	DS-6904UDI	DS-6908UDI	DS-6910UDI	DS-6912UDI	DS-6916UDI
Input	VGA	N/A	×1				
	DVI	N/A	×1				
Output	HDMI	×1	×4	×8	×10	×12	×16
	4K@30Hz (HDMI)	Yes	Odd ports support				
	VGA	×1	N/A				
External	10/100/1000Mbps Ethernet	×1	×2				
	Alarm in	×8					
	Alarm out	×8					
	Audio out (BNC)	×1	1 DB 15×2	1 DB 15×4	2 DB 15×5	2 DB 15×6	2 DB 15×8
Decoding Ability	12MP@20fps	×2	×4	×8	×10	×12	×16
	8MP@30fps	×4	×8	×16	×20	×24	×32
	1080P@30fps	×16	×32	×64	×80	×96	×128
	Screen Division	×16	×25	×36			
Mechanical	Dimensions (W×H×D)	220×148×45mm	440×311×44.5mm		440×311×80mm		
	Weight	≤ 1.2kg	≤ 5.2kg		≤ 6.4kg		

Specification	Product	Video Wall Controller		
	Model Name	DS-C10S-S11/E	DS-C10S-S22/E	DS-C10S-S41/E
Slot	Input	×6	×12	×23
	Output	×5	×10	×18
Pluggable Board	Input	VGA, HDMI, DVI, Ypbpr, DVI Dual-link, BNC, SDI, TVI, DP, Decoding board		
	Output	VGA, HDMI, DVI, SDI		
Mechanical	Dimensions (W×H×D)	352×177×442.4mm	352×354×442.4mm	417×576.6×442.4mm
	Weight	≤ 20kg (full-loaded)	≤ 35kg (full-loaded)	≤ 50kg (full-loaded)

Specification	Product	Keyboard	
	Model Name	DS-1005KI	DS-1600KI
Interface	Interface Type	USB 2.0	10/100/100M Ethernet
	Audio	N/A	3.5mm AUDIO port
	Video Interface	N/A	HDMI / DVI
External	Joystick	3-axis joystick	4-axis joystick
	WIFI	N/A	Yes
Decoding Ability	Screen	N/A	10.2", TFT touch
	Resolution	N/A	1024×600
	Operation System	N/A	Android 4.4
Mechanical	Dimensions (W×H×D)	167×116×177.5mm	404×180×163mm
	Weight	1.1kg	1.7kg



SEE BETTER, ACT FASTER HIKVISION MONITORS IN COMMAND CENTER

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216) 521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

Follow us on social media to get the latest product and solution information



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

www.hikvision.com

