



www.dedicatedmicros.com

Dedicated Micros UK	11 Oak Street, Swinton, Manchester M27 4FL UK Tel: +44 (0) 161 727 3200 Fax: +44 (0) 161 727 3300
Dedicated Micros USA	14434 Albemarle Point Place, Suite 100, Chantilly, Virginia 20151 USA Freephone: 800 864 7539 Tel: +1 703 904-7738 Fax: +1 703 904-7743 23456 Hawthorne Blvd. Suite 100, Torrance, CA 90505, Tel +1 310 791-8666 Fax: +1 310 791-9877
Dedicated Micros EUROPE	Neckarstraße 15a, 41836 Hückelhoven, Germany Tel: +49 243 352 580 Fax: +49 24 33 52 58 10
Dedicated Micros FRANCE	9-13 rue du Moulinet, 75013 Paris, France Tel: +33 1 45 81 99 99, Fax: +33 1 45 81 99 89
Dedicated Micros ASIA	16 New Industrial Road, #03-03 Hudson TechnoCentre, Singapore 536204 Tel : +65 62858982 Fax : +65 62858646
Dedicated Micros AUSTRALIA	5/3 Packard Avenue, Castle Hill, NSW 2154, Australia Tel: +612 9634 4211 Fax: +612 9634 4811
Dedicated Micros MALTA	UB 2, San Gwann Ind. Est., San Gwann, Malta Tel: +356 21483 673/4 Fax: +356 21449 170
Dedicated Micros MIDDLE EAST	Building 12, Suite 302, P.O.Box 500291, Dubai Internet City, Dubai, UAE Tel: +971 (4) 390 1015 Fax: +971 (4) 390 8655

All trademarks courtesy of the registered owners. Sprite and the DM logo are trademarks of Dedicated Microcomputers Group Ltd

DOMES & TELEMETRY

PRODUCTS AND ACCESSORIES



REDEFINE THE BOUNDARIES OF CCTV



THE PRODUCT RANGE

- 4 2060 DOME CAMERA
- 5 2060 ACCESSORIES
- 6 1000 SERIES DOME CAMERA
- 6 LOW COST INDOOR DOME
- 7 MOUNTING BRACKETS
- 8 2020 INFRARED ILLUMINATOR
- 9 880/883 INFRA-RED ILLUMINATOR
- 9 INFRA-RED ILLUMINATOR ACCESSORIES
- 10 PAN & TILTS 2000/2001/2006
- 11 508 CAMERA HOUSING
- 12 2010 CAMERA HOUSING FEATURES
- 13 506 CAMERA HOUSING FEATURES
- 14 515/516/517 CAMERA HOUSING FEATURES
- 15 CAMERA HOUSING ACCESSORIES

OVERVIEW

Undoubtedly CCTV cameras are very much in the frontline in the fight against crime and terrorism, whether that is keeping an eye on stock shrinkage in a retail environment or monitoring suspicious vehicles in a city centre. Cameras also offer the most visible indication to potential offenders that an area is being monitored. Given this reality, the sort of camera selected is obviously a critical element in any CCTV system. In recent times there is one camera type - specifically the dome - above all others that has really made its mark.

WELCOME

Dedicated Micros award winning digital video multiplex recorders has now been complemented by a range of state of the art dome cameras and associated peripherals. Dealers, distributors, and system integrators will be able to source DVMRs and domes from a single supplier - ensuring technical compatibility and simplifying installation.

Dedicated Micro's reputation for product quality, reliability, plug and play installation and ease of use is mirrored in our approach to the specialist dome camera sector

2060 DOME CAMERA

Premier precision surveillance dome

Robust, vandal resistant die-cast housings combined with state-of-the-art internal mechanisms and x18 optical zoom camera provide the ultimate performance in PTZ security surveillance. The 2060's intuitive menu structure provides quick and easy set-up and optimized compatibility with Dedicated Micros DVMR range.




- KEY FEATURES**
- Vandal resistant - robust die-cast aluminium mechanism
 - Moving domes with variable control from 0.05 - 300°/sec
 - Coaxial and twisted pair (RS485) as standard
 - Built-in colour internal and day/night camera
 - Preset tour facility
 - Advanced privacy feature
 - Indoor and outdoor versions available
 - Wide assortment of brackets and mounts
 - New intuitive easy to use menu structure
 - Improved low light IR performance
 - Clock and calendar functions for independent alarm masking
 - Two years warranty for the camera module
 - Different colour options available
 - Marine finish p.o.a.

Product Code	Description	Power consumption	Dimensions Outside (LxØ)	Weight	IP-Level	Zoom Opt./Dig.	CCD description/ Alarm In/Out
DD2060-200*	6" Indoor PAL Dome Cam 24Vac for RS485 or BBV & Baxall "up the coax" Control + PSU	18-24VAC / 10W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color 1/4", 0.7Lux 440.000 Pixel
DD2060-201	6" Outdoor PAL Dome Cam 24Vac for RS485 or BBV & Baxall "up the coax" Control + PSU	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color & B/W 1/4", 0.7Lux 440.000 Pixel
DD2060-202	6" Indoor PAL Dome Camera 24Vac for RS485 or BBV & Baxall "up the coax" control + PSU with BBV drx100 card (4 alarms)	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color 1/4", 0.7Lux In 4 / Out 1 440.000 Pixel
DD2060-203	6" Outdoor PAL Dome Camera 24Vac for RS485 or BBV & Baxall "up the coax" control + PSU with BBV drx100 card (4 alarms)	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color 1/4", 0.7Lux In 4 / Out 1 440.000 Pixel
DD2060-204	6" Indoor PAL Dome Camera 24Vac for RS485 or BBV & Baxall "up the coax" control + PSU with 8 input Alarm Card	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color 1/4", 0.7Lux In 8 / Out 1 440.000 Pixel
DD2060-205	6" Outdoor PAL Dome Camera 24Vac for RS485 or BBV & Baxall "up the coax" control + PSU with 8 input Alarm Card	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color & B/W 1/4", 0.7Lux, In 8 / Out 1, 440.000 Pixel
DD2060-209	6" Outdoor PAL Side Entry Dome Cam 24Vac for RS485 or BBV & Baxall "up the coax" Control + PSU	18-24VAC / 20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color & B/W 1/4", 0.7Lux 440.000 Pixel
DD2060-006	6" Indoor/Outdoor Dummy Dome complete with wall mount		229x175mm	3.6kg	IP66		
DDDRX100PSU	DRX100 Receiver and Power supply unit for 2055 Dome in weatherproof box	230VAC / 20W	LxWxH: 170 x 175 x100mm	1.5kg	IP66		
DD2060-280	6" Outdoor PAL dome Cam 24Vac for RS485 or BBV & Baxall "up-the-coax" control + PSU. Fitted with sunshield and internal cooling fan for direct sunlight applications.	20W	255 x 262mm	4.1kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color & B/W 1/4", 0.7Lux 440.000 Pixel
DD2060-208	6" Outdoor dome with fixed attitude, switchable col/mono zoom camera + PSU	20W	229x175mm	3.6kg	IP66	18x/12x 4.1-73.8mm 48°-2.8°	Color & B/W 1/4", 0.7Lux 440.000 Pixel

* DD2060-200 for operating systems in English, French, Spanish, Italian and Dutch.
DD2060-200N for operating systems in English, German, Swedish, Finnish, and Danish.
DD2060-200E for operating systems in English, Croatian, Czech and Polish.

ACCESSORIES

1. DD90001
2. DD90002
3. DD90003
4. DD90004
5. DD90005
6. DD90006
7. DD90007
8. DD90008
9. DD90009
10. DD900010

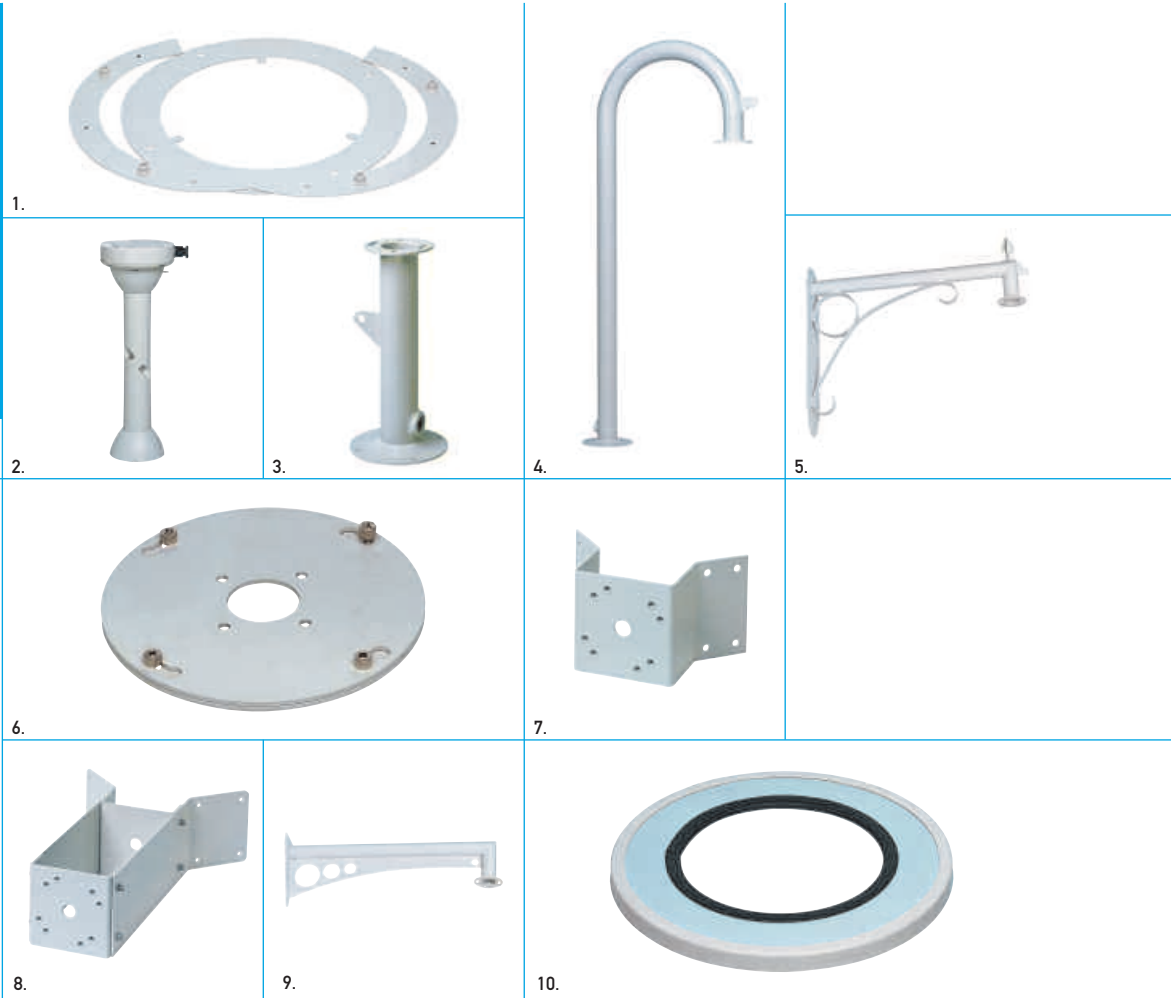

No	Product Code	Dimensions	Description	Compatible with
1	DD90001	H127xØ341mm	Tile Mount	All versions of 2060
2	DD90002	H354xØ46mm; H160x193mm	Wall/Pendant Mount	All versions of 2060
3	DD90003	H200 - xmmm Ø44.5mm	Pendant Mount	All versions of 2060
4	DD90004	H678xW300xH200mm	Snowdrop Mount	All versions of 2060
5	DD90005	customer requirements	Vintage style wall mount	All versions of 2060
6	DD90006	Ø240xØ80mm	Ceiling Mount Plate	All versions of 2060
7	DD90007	2 arms 90°: L399xH170mm	Corner Bracket to convert existing wall bracket	All versions of 2060
8	DD90008	L112xH170mm	Extended Corner Bracket	All versions of 2060
9	DD90009	L112xH170mm	Extended Wall Mount for Wall/Pendant Bracket DD90002	All versions of 2060
10	DD900010		Rain Shield	All versions of 2060

SERIES1000 MANUAL DOME

Externally adjustable minidome camera

Unique in the US market place, the Series 1000 mini dome provides the end-user with pan and tilt adjustment of the camera view without the need to open the camera.

KEY FEATURES

Using a single, simple tool the end-user may rotate the camera to 355 ° and tilt to 90 ° to quickly change the view to an alternate position. This swift and easy adjustment provides flexibility for the end-user without compromising the weather proof seal or introducing dust into the housing.

- Externally adjustable pan and tilt mechanism
- Choice of high or medium resolution colour camera and high resolution mono camera
- Vandal resistant die-cast aluminum housing with polycarbonate hemisphere
- Weatherproof – tested to international standard IP67 suitable for indoor and outdoor applications
- Ceiling mounted
- Wide range of factory fitted and tested lens options



2040 DOME

The low-cost indoor dome delivers many of the features of the 2060 dome, but is priced comparatively to a pan-tilt-zoom camera. This provides an alternative for those end-users who prefer the convenience and programmability of a dome camera, but had previously considered domes to be cost prohibitive.



KEY FEATURES

The dome still features a high quality colour camera with a x18 zoom lens and enhanced privacy zone masking facilities. The robust internal aluminium die-cast mechanism also has a quick install and release mechanism to allow rapid hot-swap replacement.

- High quality x18 optical zoom colour camera
- Ability to generate privacy zones
- Intuitive, easy to use menu structure closely matching the Dennard 2060
- Up-the coax and RS485 telemetry protocols available as standard
- Tile mounting with quick release, hot-swap replacement
- 2 years warranty

MOUNTING BRACKETS


317/428/642
436
433B

ACCESSORIES

- Constructed from die cast aluminium, powder coated & stoved
- A range of build options available
- Payloads of up to 15kg (428)
- Payloads of up to 5kg (428B)
- Payloads of up to 10kg (317)
- 360 degrees pan movement
- +/- 70 degrees tilt movement
- 433B: Flexible mounting system (wall, ceiling)
- 433B: Concealed mounting screw

TYPES

1. TYPE 428
2. TYPE 642
3. TYPE 317
4. TYPE 436
5. TYPE 433B

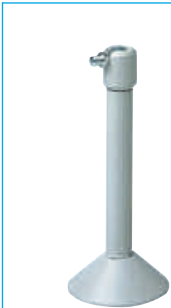

Product Code	Material	Corner Option	Load	Dimension (LxH)	IR Option	Compatible with
DD317	Aluminium alloy	No	10kg	233x107mm	No	DD506
DD317/IRS	Aluminium alloy	No	10kg	233x107mm	Add 1 IR lamp	DD506
DD317/IRD	Aluminium alloy	No	10kg	233x107mm	Add 2 IR lamps	DD506
DD428	Aluminium alloy	No	15kg	317.5x175mm	No	DD506 and DD515/516
DD428/IRS	Aluminium alloy	No	15kg	317.5x175mm	Add 1 IR lamp	DD506 and DD515/516
DD428/IRD	Aluminium alloy	No	15kg	317.5x175mm	Add 2 IR lamps	DD506 and DD515/516
DD433B	Aluminium alloy	No	4kg	406x84mm	No	Fixed Cameras only
DD436	Aluminium alloy	346CB	20kg	506x278mm	Mount on 2000 PT	DD2000/1/6 & bracket DD436 & 346CB
DD642	Aluminium alloy	No	20kg	455x240mm	No	DD516/517
DD642IRS	Aluminium alloy	No	20kg	455x240mm	Add 1 IR lamp	DD516/517
DD642IRD	Aluminium alloy	No	20kg	455x240mm	Add 2 IR lamp	DD516/517
DD642B	Aluminium alloy	No	10kg	455x240mm	Mount for Pan and Tilt	DD516/517

INFRA-RED

2020

INFRA-RED ILLUMINATOR



KEY FEATURES

- Optional 715nm or 830nm glass filter
- Bulb life: 2020/300-2000hrs, 2020/500-4000hrs
- Mountings for infra-red illuminators are available on type 428 and type 642 brackets
- Available in a range of beam angles
- Built-in 25 lux light detector on adjustable mounting
- Weatherproof to BS.EN 60529 Level IP 66
- Fitted stoneguard as standard

ACCESSORIES

1. DDHX502, DDHX504
2. DD888



Product Code	Filter	Beam angle	Power consumption	Metres achieved	Dimensions Outside (LxWxH)	Weight	IP-Level	Options
DD2020-300N715	715nm	Narrow 20°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-300N830	830nm	Narrow 20°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-300M715	715	Medium 30°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-300M830	830nm	Medium 30°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-300W715	715	Wide 60°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-300W830	830nm	Wide 60°	230V / 300W	80 - 120m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-500N715	715nm	Narrow 11°	230V / 500W	120 - 200m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-500N830	830nm	Narrow 11°	230V / 500W	120 - 200m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-500M715	715	Medium 39°	230V / 500W	120 - 200m	252x218x239mm	3kg	IP66	incl. PSU & Photocell
DD2020-500M830	830nm	Medium 39°	230V / 500W	120 - 200m	252x218x239mm	3kg	IP66	incl. PSU & Photocell

No	Product Code	Description	Compatible with
1	DDHX502	Narrow replacement bulb for series 2020 (500W) IR illuminator	Series DD2020xxx
1	DDHX504	Medium replacement bulb for series 2020 (500W) IR illuminator	Series DD2020xxx
1	DD886N	Narrow replacement bulb for 2020 (300W) IR illuminator	Series DD2020xxx
1	DD886M	Medium replacement bulb for 2020 (300W) IR illuminator	Series DD2020xxx
1	DD886W	Wide replacement bulb for 2020 (300W) IR illuminator	Series DD2020xxx
2	DD888/25-2020-300	Photo electric switch and replacement loom for 2020 (300W) illuminator	Series DD2020xxx
2	DD888/25-2020-500	Photo electric switch and replacement loom for 2020 (500W) illuminator	Series DD2020xxx

INFRA-RED

880/883

INFRA-RED ILLUMINATOR



KEY FEATURES

- Attractive styling
- 20W or 50W (880) 75W (883)
- 2000 hours average lamp life
- 715nm or 830nm dichroic filters for a choice of covert illumination
- Narrow or Medium beam angle
- Weatherproof to BS.EN 60529 Level IP 65 (no water ingress)

ACCESSORIES

1. DD888/2
2. DD888/2/105
3. DD881M20, DD881M50, DD881N20, DD881N50
4. DD880/PSU, DD883/PSU



Product Code	Filter	Beam angle	Power consumption	Metres achieved	Dimensions Outside (LxWxH)	Weight	IP-Level	Options
DD880N20715	715nm	Narrow 24°	12V / 20W	5 - 10m	138x63x74mm	350g	IP65	Power supply: DD882/PSU
DD880N20830	830nm	Narrow 24°	12V / 20W	5 - 10m	138x63x74mm	350g	IP65	Power supply: DD882/PSU
DD880M20715	715nm	Medium 36°	12V / 20W	5 - 10m	138x63x74mm	350g	IP65	Power supply: DD882/PSU
DD880M20830	830nm	Medium 36°	12V / 20W	5 - 10m	138x63x74mm	350g	IP65	Power supply: DD882/PSU
DD880N50715	715nm	Narrow 21°	12V / 50W	15 - 30m	138x63x74mm	350g	IP65	PSU DD882/PSU; white light typ 807
DD880N50830	830nm	Narrow 21°	12V / 50W	15 - 30m	138x63x74mm	350g	IP65	PSU DD882/PSU; white light typ 807
DD880M50715	715nm	Medium 38°	12V / 50W	15 - 30m	138x63x74mm	350g	IP65	PSU DD882/PSU; white light typ 807
DD880M50830	830nm	Medium 38°	12V / 50W	15 - 30m	138x63x74mm	350g	IP65	PSU DD882/PSU; white light typ 807
DD883N715	715nm	Narrow 18°	12V / 75W	30 - 80m	147x89x95.5mm	800g	IP65	Power supply: DD888-2-105/PSU
DD883N830	830nm	Narrow 18°	12V / 75W	30 - 80m	147x89x95.5mm	800g	IP65	Power supply: DD888-2-105/PSU
DD883M715	715nm	Medium 38°	12V / 75W	30 - 80m	147x89x95.5mm	800g	IP65	Power supply: DD888-2-105/PSU
DD883M830	830nm	Medium 38°	12V / 75W	30 - 80m	147x89x95.5mm	800g	IP65	Power supply: DD888-2-105/PSU

No	Product Code	Description	Compatible with
1	DD888/2	Photo electric switch and 883 (75W) power supply fitted into a weatherproof function box	Series DD880xxx
2	DD888/2/105	Photo electric switch and 880 (50W) power supply fitted into a weatherproof function box	Series DD883xxx
3	DD881M20	Medium replacement bulb for series 880 (20W) IR illuminator	Series DD880xxx
3	DD881M50	Medium replacement bulb for series 880 (50W) IR illuminator	Series DD880xxx
3	DD881N20	Narrow replacement bulb for series 880 (20W) IR illuminator	Series DD880xxx
3	DD881N50	Narrow replacement bulb for series 880 (50W) IR illuminator	Series DD880xxx
4	DD880/PSU	Power supply for series 880 Microlight. Input: 230V; Output: 12V; Consumption: 20 or 50W	Series DD880xxx
4	DD883/PSU	Power supply for series 883 Microlight. Input: 230V; Output: 12V; Consumption: 75W	Series DD883xxx

PAN & TILTS

2000/2001/2006
PAN & TILT HEAD




KEY FEATURES

- Aesthetically styled
- Payloads of up to 20kg (no need for counter balance weights)
- Pressure die cast construction
- 230Va.c. 110Va.c. 24Va.c. units
- 24Vd.c. unit (Type 2006)
- Available in a range of configurations
- Weatherproof to BS.EN.60529 Level IP66. (no water ingress)
- Covered externally adjustable limits
- Anti-backlash pan gearing. (Type 2000/2001)

ACCESSORIES

1. Bracket: 436
2. Corner Bracket: 436CB
3. Wall Mount: DD642B

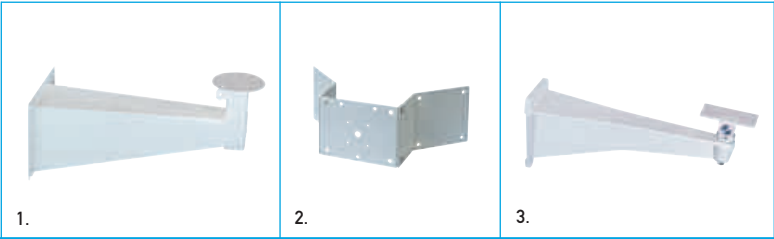


Product Code	Description	Movement	Speed	Dimensions (LxWxH)	Load	Weight	IP-Level	Options
DD2000	Pan & Tilt 230VAC/24W	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan, 3°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2000/A	Pan & Tilt 230VAC/24W with Autopan	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2000/SP	Pan & Tilt 230VAC/24W with Side Platform	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x468x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2001	Pan & Tilt 24VAC/24W	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2001/A	Pan & Tilt 24VAC/24W with Autopan	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2001/SP	Pan & Tilt 24VAC/24W with Side Platform	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x468x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436), fast pan speed(12°)
DD2006	Pan & Tilt 24VDC/36W	Pan 5° - 350° / Tilt +20° - -90°	48°/sec. pan 16°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436)
DD2006/SP	Pan & Tilt 24VDC/36W with Side Platform	Pan 5° - 350° / Tilt +20° - -90°	7.5°/sec. pan 3°/sec. tilt	255x468x274mm	20kg	7.5kg	IP66	(corner) bracket 436 (& CB436)
DD2006/PP/TP	Pan & Tilt 24VDC/36W Preset feedback potentiometers	Pan 5° - 350° / Tilt +20° - -90°	48°/sec. pan 16°/sec. tilt	255x217x274mm	20kg	7.5kg	IP66	incl. PSU & Photocell & Stoneguard
DD/PP/TP	Preset feedback potentiometers on Pan/Tilt functions							

No	Product Code	Material	Corner Option	Load	Dimension (LxH)	IR Option	Load	Compatible with
1	DD436	Aluminium alloy	346CB	20kg	506x278mm	Mount on 2000 PT	10kg	DD2000/1/6 & bracket DD436 & 346CB
2	DD436CB	Aluminium alloy						DD436
3	DD642B	Aluminium alloy	No	10kg	455x240mm	Mount for Pan and Tilt	10kg	DD516/517

CAMERA HOUSING

508
CAMERA HOUSING

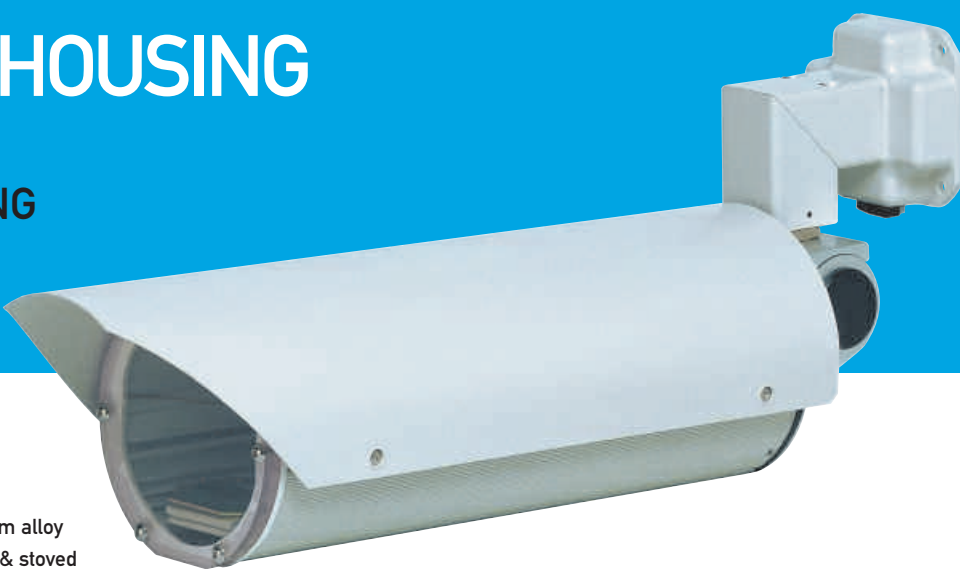


KEY FEATURES

- Constructed from aluminium alloy extrusions, powder coated & stoved
- Vandal resistant
- Slide and hang operation for ease of installation & maintenance
- Horizontal insulated camera platform adjustment
- Window heater & thermostat
- Hidden cable bracket - Wall or ceiling mounting
- Available voltages - 240V, 110V, 24V, 12V
- Weatherproof.- BS.EN 60529 Level IP65(no water ingress)

ACCESSORIES

1. DD/WW5 Washer
2. DD/WW25 Washer

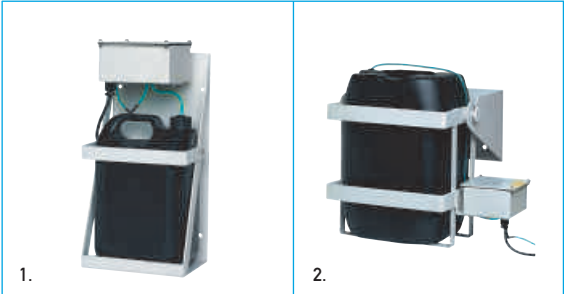

Product Code	Material	IP Level	Heater Consumption	Dimensions Inside (LxWxH)	Dimensions Outside (LxWxH)	Weight	Wall Bracket	Options
DD508	Aluminium alloy	IP65	9W	260x84x84mm	551x150x230mm	4.5kg	included	AntiTampSwitch

No	Product Code	Type	Description	Compatible with
1	DD/WW5 Washer	5 Litre	Windscreen washer	DD506 and DD515/516/517
2	DD/WW25 Washer	25 Litre	Windscreen washer	DD506 and DD515/516/517

CAMERA HOUSING

2010 CAMERA HOUSING



KEY FEATURES

- Attractive styling
- Pressure die cast aluminium alloy construction
- 'O' ring seal
- Fused input terminal block
- Cable management bracket assembly
- Keylock option
- Available voltages - 230V, 110V, 24V, 12V
- Weatherproof to BS.EN.60529 level IP66

ACCESSORIES

1. DD/WW5 Washer
2. DD/WW25 Washer
3. Security Lock



Product Code	Material	IP-Level	Heater Consumption	Dimensions Inside (LxWxH)	Dimensions Outside (LxWxH)	Weight	Wall Bracket	Options
internal								
DD2010/D	Aluminium alloy	IP50	12W	230x75x80mm	435x122x115mm	2.2kg	included	SecLock, AntiTampSwitch
external								
DD2010/24V	Aluminium alloy	IP65	12W	230x75x80mm	435x122x115mm	2.2kg	included	SecLock, AntiTampSwitch
DD2010/230V	Aluminium alloy	IP65	12W	230x75x80mm	435x122x115mm	2.2kg	included	SecLock, AntiTampSwitch
DD2010/24V-NB	Aluminium alloy	IP65	12W	230x75x80mm	435x122x115mm	2.2kg	no	SecLock, AntiTampSwitch
DD2010/230V-NB	Aluminium alloy	IP65	12W	230x75x80mm	435x122x115mm	2.2kg	no	SecLock, AntiTampSwitch

No	Product Code	Type	Description	Compatible with
1	DD/WW5 Washer	5 Litre	Windscreen washer	DD506 and DD515/516/517
2	DD/WW25 Washer	25 Litre	Windscreen washer	DD506 and DD515/516/517
3	DD/L2010	SecLock	Security lock - DD2010/D/24V/230V only	DD2010, DD2010/D* (option)

CAMERA HOUSING

506 CAMERA HOUSING



KEY FEATURES

- Constructed from zintec sheet, powder coated & stoved
- Three latch cover retention
- Horizontal and vertical camera platform adjustment
- Window heater & thermostat
- Two cable gland entries
- Stainless steel fixings
- Available voltages - 240V, 110V, 24V, 12V
- Weatherproof - BS.EN 60529 Level IP65 (no water ingre

ACCESSORIES

1. DD/W-506
2. DD/WW25
3. DD/WW5
4. DD/VR
5. DD317
6. DD428



Product Code	Material	IP Level	Heater Consumption	Dimensions Inside (LxWxH)	Dimensions Outside (LxWxH)	Weight	Wall Bracket	Options
DD506	Zintec sheet	IP65	12W	406x129x84mm	473.5x171x119mm	2.6kg	DD317, DD428	Wiper, Washer, Vandal res., nti TampSwitch

No	Product Code	Type	Description	Compatible with
1	DD/W-506	Wiper	Self parking wiper - 500/130WP, DD506	DD506
2	DD/WW5	Washer	5 Litre Windscreen washer	DD506 and DD515/516/517
3	DD/WW25	Washer	25 Litre Windscreen washer	DD506 and DD515/516/517
4	DD/VR	Vandal res.	Vandal resistant catches - DD506, DD515/516/517 only	DD506 and DD515/516/517

No	Product Code	Material	Corner Option	Load	Dimension (LxH)	IR Option	Compatible with
5	DD317	Aluminium alloy	No	10kg	233x107mm	No	DD506
6	DD428	Aluminium alloy	No	15kg	317.5x175mm	No	DD506 and DD515/516
7	DD317/IRS	Aluminium alloy	No	10kg	233x107mm	Add 1 IR lamp	DD506
8	DD317/IRD	Aluminium alloy	No	10kg	233x107mm	Add 2 IR lamps	DD506
9	DD428/IRS	Aluminium alloy	No	15kg	317.5x175mm	Add 1 IR lamp	DD506 and DD515/516
10	DD428/IRD	Aluminium alloy	No	15kg	317.5x175mm	Add 2 IR lamps	DD506 and DD515/516

CAMERA HOUSING


515/516/517



KEY FEATURES

- A range of build options available
- Constructed from aluminium alloy sheet
- Powder coated and stoved
- Weatherproof to BS.EN 60529 Level IP65 (no water ingress)
- Window heater and thermostat
- Horizontally adjustable insulated camera platform
- Available voltages - 230V, 110V, 24V


Product Code	Material	IP-Level	Heater Consumption	Dimensions Inside (LxWxH)	Dimensions Outside (LxWxH)	Weight	Wall Bracket	Options
DD515	Aluminium alloy	IP65	75W	440x135x125mm	555x205x162mm	3.6kg	DD428	Wiper, Washer, Fan, DeepBase, SecLock, Vandal res., AntiTampSwitch, Ventilated Sun
DD516	Aluminium alloy	IP65	75W	485x160x155mm	605x235x192mm	4.5kg	DD428, DD642	
DD517	Aluminium alloy	IP65	75W	560x190x183mm	700x270x225mm	6.3kg	DD642	

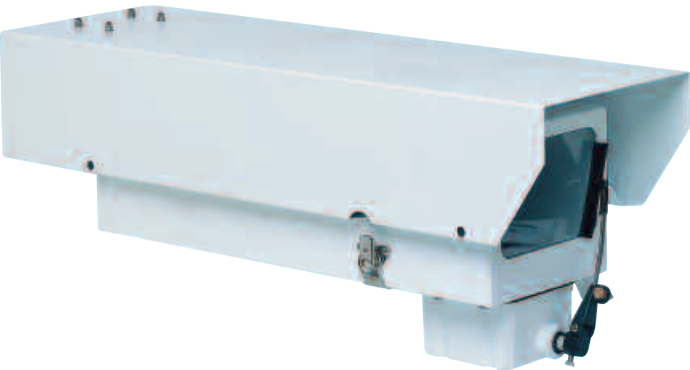

Product Code	Description
DD515/W/L/MH	515 Housing with Wiper & Lock in Marine Finish
DD515/L/MH	515 Housing with Lock in Marine Finish
DD516/W/L/MH	516 Housing with Wiper & Lock in Marine Finish
DD516/L/MH	516 Housing with Lock in Marine Finish

ACCESSORIES

1. DD/W-506 DD/W-515/516 DD/W-517
2. DD/WW5
3. DD/WW25
4. DD/F515
5. DD/DB
6. DD/L515
7. DD/VR
8. Bracket: 428 for 515,516 only
9. Bracket: 642 for 516,517 only

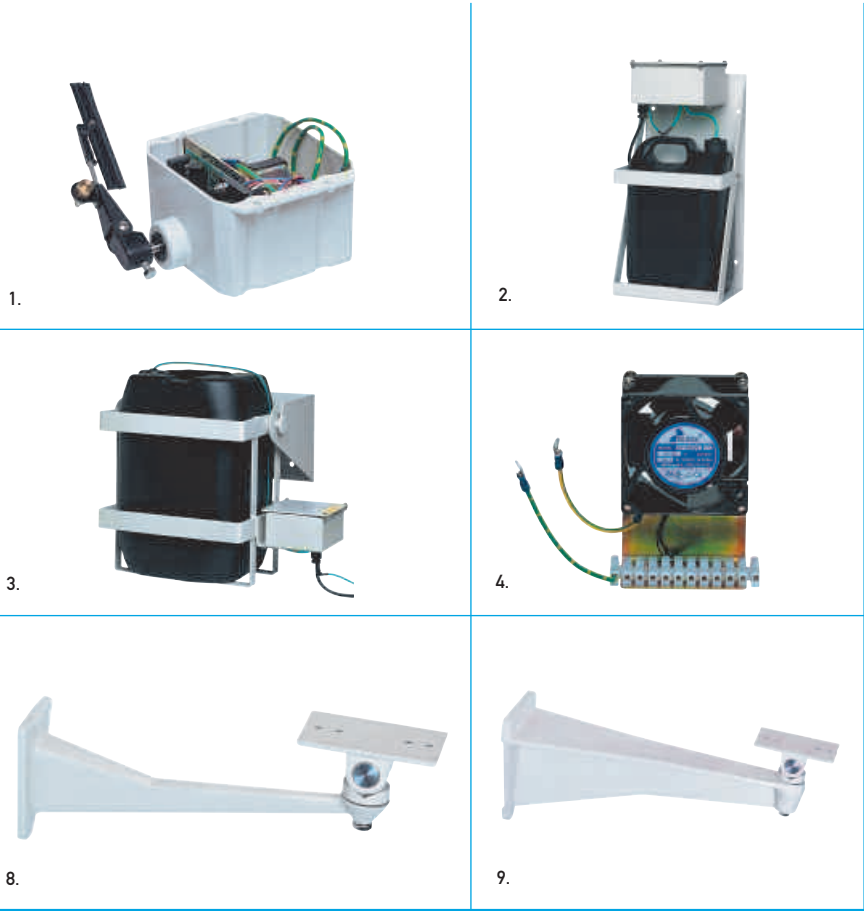

No	Product Code	Type	Description	Compatible with
1	DD/W-506	Wiper	Self parking wiper - 500/130WP, DD506	DD506
1b	DD/W-515/516	Wiper	Self parking wiper - 500/130WP, DD515+DD516	DD515,DD516
1c	DD/W-517	Wiper	Self parking wiper - 500/130WP, DD517	DD517
2	DD/WW5	Washer	5 Litre Windscreen washer	DD506 and DD515/516/517
3	DD/WW25	Washer	25 Litre Windscreen washer	DD506 and DD515/516/517
4	DD/F515	Fan	Internal circulation fan - DD515/516/517 only	DD515/516/517
5	DD/DB	DeepBase	Deep base - providing space for telemetry receiver - DD515/516/517 only	DD515/516/517
6	DD/L515	SecLock	Security lock - DD515/516/517 only	DD515/516/517
7	DD/VR	Vandal res.	Vandal resistant catches - DD506, DD515/516/517 only	DD506 and DD515/516/517
8	DD428	Brackets	Aluminium alloy, Load 15kg, Dimension (LxH) 317.5x175mm	515,516 only
9	DD642	Brackets	Aluminium alloy, Load 20kg, Dimension (LxH) 455x240mm	516,517 only
10	DD/VS	VentilatedSun	Ventilated Sunshield for Ambient Temperature, Version 24 VAC	DD515/516/517 (230)
11	DD/VS-24	VentilatedSun	Ventilated Sunshield for Ambient Temperature, Version 24 VAC	DD515/516/517 (24)
12	DD515/22/95	Wiper Arm	Unit for DD516 Housing	DD516
13	DDH3	Spare Wiper	Blade for DD/W	DD/W