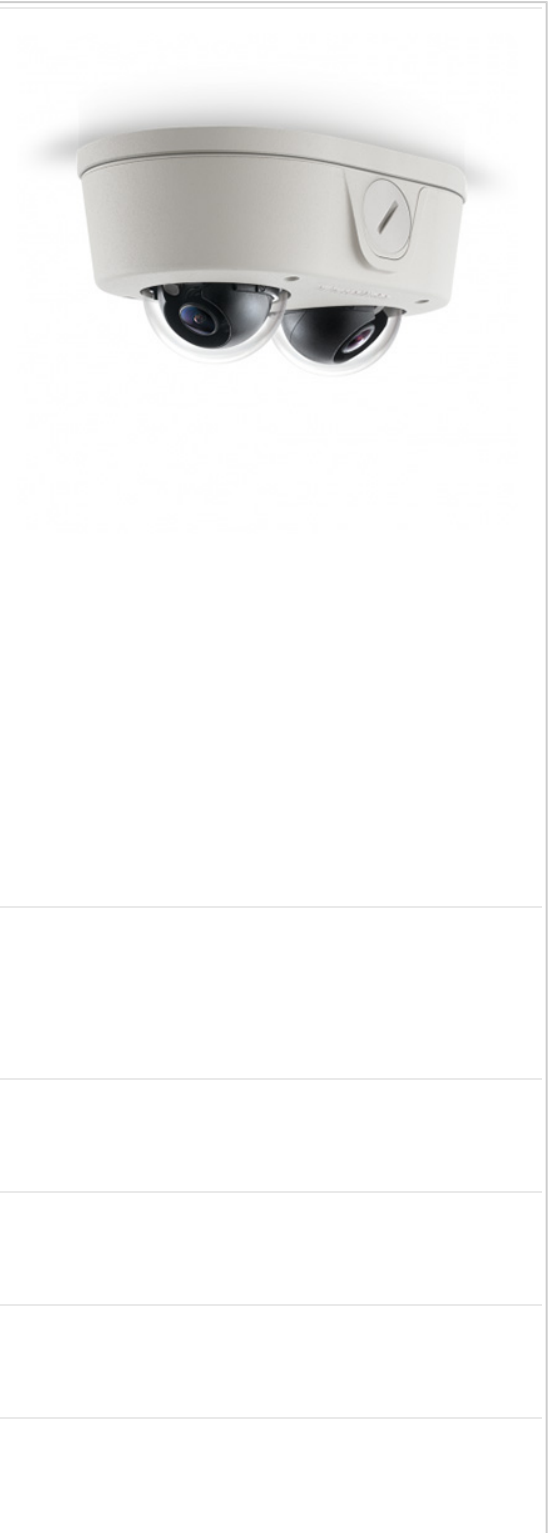


Arecont Vision AV4655DN-28 4MP TDN IP dome camera

Technical Specification

| | | |
|----------------------------|--------------------------------|--|
| Make | Arecont Vision |  |
| Company | Arecont Vision | |
| Model code | AV4655DN-28 | |
| Previously known as | 1 | |
| Chip Inch Size | 1/3 | |
| Colour Type | True Day / Night | |
| Resolution TVL | 4MP | |
| Megapixel | Yes | |
| Dome Type | PTZ | |
| Sensitivity lux | 0.2 (Colour), 0.02 (B/W) | |
| Indoor/Outdoor | Indoor/Outdoor | |

| | |
|----------------------------------|--|
| Digital (DSP) | Yes |
| Mount Type | Wall, Ceiling |
| Electrical Specifications | Voltage: PoE Power Consumption: 7.9 W |
| Focal length | 2.8 / 8 mm |
| Compression | H.264 (MPEG-4, Part 10)/Motion JPEG |
| Back Light Compensation | Yes |
| Auto Gain Control | Yes |
| White Balance | Yes |
| Electronic Shutter range | 1ms ~ 500ms |
| Network Properties | Interface: 100Base-T Ethernet Network Protocols: RTSP, RTP/TCP, RTP/UDP, HTTP, DHCP, TFTP Image Frame Rate: 15 fps |
| Physical Specifications | Dimensions mm: 72 x 103 x 163 Weight g: 880 |

| | |
|-------------------------------------|---|
| Environmental Specifications | Operating Temp °C: -40 ~ +50 C (-40 ~ +122 F) Operating Humidity %: 0 ~ 90 Protection: IP66, IK-10 |
| Additional info | <ul style="list-style-type: none">┌ SNAPstream™ (Smart Noise Adaptation and Processing) Reduces Bandwidth without Impacting image quality┌ True Day/Night functionality with mechanical IR cut filter┌ CorridorView™ allows 90° image rotation for better coverage in hallways and corridors┌ Dual encoder H.264/MJPEG┌ Remote focus module |