

# MEGAPIXEL VARI-FOCAL

## High Image Quality Supporting 3 Megapixels

**MP** MEGA PIXELS

**AT**  
ASPHERIC TECHNOLOGY


Using Aspherical Lens



YV2.8×2.8SA-SA2



YV4.3×2.8SA-SA2

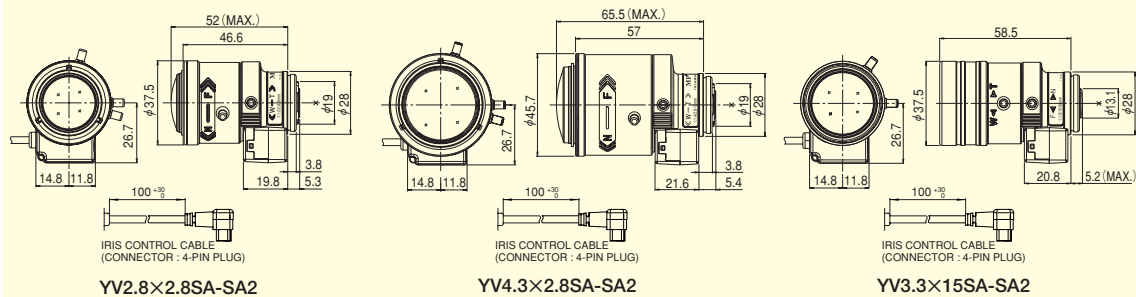


Unit : mm

		YV2.8×2.8SA-SA2	YV4.3×2.8SA-SA2	YV3.3×15SA-SA2	
Focal Length (mm)		2.8~8 (2.8×)	2.8~12 (4.3×)	15~50 (3.3×)	
Iris Range		F1.2 ~ T360 (Equivalent to F360)	F1.4 ~ T360 (Equivalent to F360)	F1.5 ~ T360 (Equivalent to F360)	
Operation	Zoom	Manual	Manual	Manual	
	Focus	Manual	Manual	Manual	
	Iris	Auto (DC Type) (*1)	Auto (DC Type) (*1)	Auto (DC Type) (*1)	
Angle Of View (H×V)	1/3"	WIDE	100°00' × 73°45'	100°02' × 74°03'	18°08' × 13°34'
		TELE	35°03' × 26°18'	23°21' × 17°36'	5°35' × 4°12'
	1/4"	WIDE	73°45' × 54°49'	74°03' × 55°06'	13°34' × 10°10'
		TELE	26°18' × 19°44'	17°36' × 13°13'	4°12' × 3°10'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.3	∞ ~ 0.3	∞ ~ 0.8	
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	744 × 468	753 × 476	271 × 202
		TELE	197 × 146	131 × 98	87 × 66
	1/4"	WIDE	468 × 323	476 × 329	202 × 151
		TELE	146 × 108	98 × 73	66 × 49
Back Focal Distance (in air) (mm)		7.70	7.80	10.03	
Exit Pupil Position (From Image Plane) (mm)		314	455	-36	
Filter Thread (mm)		—	—	—	
Mount		CS	CS	CS	
Mass (g)		50	60	60	
Coil Resistance		Drive Coil 190Ω Damping Coil 500Ω	Drive Coil 190Ω Damping Coil 500Ω	Drive Coil 190Ω Damping Coil 500Ω	
Current Consumption		23mA (Max.) at DC 4V	23mA (Max.) at DC 4V	23mA (Max.) at DC 4V	
Remarks		With Metal Mount (*1) When power is turned off, iris will automatically close. Also available : Long Cable Type (230mm)			

Coming Soon!

(Telephone Type)

### Wiring



**FUJINON**  
FUJIFILM

<http://www.fujinoncctv.com>

#### Japan / Northeast Asia

**FUJINON Corporation**  
1-324 Uetake, Kita-ku, Saitama City,  
Saitama 331-9624, Japan  
TEL.+81-48-668-2152 FAX.+81-48-651-8517  
E-mail: sales@msv.fujinon.co.jp  
URL <http://www.fujinon.co.jp/>

#### North & South America

**FUJINON INC.**  
10 High Point Drive, Wayne,  
NJ 07470-7434, U.S.A.  
TEL.+1-973-633-5600 FAX.+1-973-633-5216  
E-mail: lens.sales@fujinon.com  
URL <http://www.fujinon.com/>

#### Europe / Africa / Middle East

**FUJINON (EUROPE) GmbH**  
Halskestrasse 4, 47877 Willich,  
Germany  
TEL.+49-2154-924-0 FAX.+49-2154-924-290  
E-mail: fujinon@fujinon.de  
URL <http://www.fujinon.de/>

#### Southeast Asia / West Asia

**FUJINON SINGAPORE PTE. LTD.**  
BLK211 Henderson Road, #10-04,  
Henderson Industrial Park, Singapore 159552  
TEL.+65-6276-4988 FAX.+65-6276-6911  
E-mail: fujinon@fujinon.com.sg  
URL <http://www.fujinon.com.sg/>

#### China

**FUJINON HONG KONG LTD.**  
Unit 2605-2607, Level 26, Metroplaza,  
Tower 1, 223 Hing Fong Road,  
Kwai Fong N.T., Hong Kong  
TEL.+852-2311-1228 FAX.+852-2724-1118  
E-mail: enquiry@fujinon.com.hk  
URL <http://www.fujinon.com.cn/>

#### Oceania

**FUJINON AUSTRALIA PTY. LTD.**  
Unit-18, 52 Holker Street, Silverwater,  
N.S.W. 2128, Australia  
TEL.+61-2-9748-2744 FAX.+61-2-9748-2428  
E-mail: sales@fujinon.com.au