# **AUTODOME IP starlight 5000i IR**

www.boschsecurity.com

















- ► Starlight camera technology with excellent low-light performance
- ► High-performance HD outdoor PTZ dome camera with integrated IR illumination for scenes with low or no ambient lighting
- ► Variable illumination ensures that IR light is uniformly distributed in the field to minimize dark spots or over-illuminated scenes
- ► Long distance illumination >180 m (590 ft)

Keep your security in focus with the many features of the AUTODOME IP starlight 5000i IR camera. The camera is carefully tuned to deliver detailed, 1080p60 HD images during the day as well as full details in low-light or no-light conditions. The integrated, intelligent IR illuminator automatically adjusts the IR intensity according to zoom factor and field of view to ensure that the scene is illuminated uniformly.

#### **Functions**

#### See in the dark

The camera's smart, variable IR illumination technology from Bosch produces outstanding video on a per-zone basis in low-light scenes. This configuration ensures that each scene receives the appropriate illumination intensity and avoids focus instability from mixed lighting conditions.

#### Low-light performance

The latest sensor technology, combined with sophisticated noise suppression and a High dynamic range of 120 dB, results in an exceptional sensitivity in color. The camera continues to provide excellent color performance even with a minimum of ambient light.

#### Pre-programmed user modes

The camera has several pre-configured scene modes with the best settings for various applications. With one click, users can optimize image settings to match the camera's lighting conditions. Users can also configure individual image settings.

- · Standard: For indoor fluorescent lighting.
- Sodium-lighting: For scenarios where the video is captured under sunlight in the day or under sodium vapor lamp at night.
- Vibrant: For enhanced contrast, sharpness, and saturation
- Number Plate scene mode: For the best image to be used by ANPR software.

#### H.265 high-efficiency video encoding

The camera is designed on the most efficient and powerful H.264 and H.265/HEVC encoding platform. The camera is capable of delivering high-quality and high-resolution video with very low network load. With a doubling of encoding efficiency, H.265 is the new compression standard of choice for IP video surveillance systems.

#### Intelligent streaming

Smart encoding capabilities, together with Intelligent Dynamic Noise Reduction technology and analytics, make the bandwidth consumption drop to extremely low levels. Only relevant information in the scene, such as motion or objects found with the analytics, are encoded.

## Support for H.264 and H.265 with Encoder Regions

Set a region in the field of view and define a specific encoder profile to it. This setting reduces the bitrate of the stream further than intelligent streaming alone.

#### Recording and storage management

Recording management can be controlled by the Bosch Video Recording Manager application, or the camera can use local storage and iSCSI targets directly without any recording software.

A memory card with a maximum of 32 GB (microSDHC) / 2 TB (microSDXC) can be used for recording "at the edge" or for Automatic Network Replenishment (ANR) technology to improve the overall recording reliability.

Pre-alarm recording in RAM reduces bandwidth consumption on the network and extends the effective life of the memory card.

#### **Essential Video Analytics on the edge**

The camera includes the latest release of Essential Video Analytics application from Bosch for use on Pre-positions.

The Essential Video Analytics application provides reliable video analytics for small and medium business, large retail stores, commercial buildings, and warehouses.

Advanced tasks like multiple line crossing, loitering, idle / removed object detection, crowd density estimation, occupancy and people counting are available for live alarming and forensic search. Object filters based on size, speed, direction, aspect ratio, and color can be defined.

A simplified calibration mode reduces installation time significantly, because you only need to enter the installation height once for each camera, independent of pre-positions.

After the camera is calibrated, the analytics engine can automatically classify objects as upright person, car, bike, or truck.

#### Sophisticated alarm responses

The camera supports advanced alarm control that uses sophisticated rules-based logic to determine how to manage alarms. In its most basic form, a "rule" could define which input(s) should activate which output(s). In a more complex form, inputs and outputs can be combined with pre-defined or user-specified commands to perform advanced camera functions.

#### Superior privacy masking

The camera allows for a total of 32 individual privacy masks, with up to eight masks displayed in the same scene. Each mask can be programmed with eight corners. Each mask changes size and shape smoothly and quickly, ensuring that the covered object cannot be seen.

With the AUTO Privacy Mask, the color of the Privacy Mask will adapt to the color of the surroundings.

#### **DORI** coverage

DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a camera to distinguish persons or objects within a covered area. The maximum distance at which a camera/lens combination can meet these criteria is shown below:

	DORI definition	Distance	
		WIDE 1X	TELE 30X
Detect	25 px/m	65 m	1833 m
	(8 px/ft)	(213 ft)	(6014 ft)
Observe	63 px/m	26 m	727 m
	(19 px/ft)	(85 ft)	(2385 ft)
Recognize	125 px/m	13 m	367 m
	(38 px/ft)	(43 ft)	(1204 ft)
Identify	250 px/m	7 m	183 m
	(76 px/ft)	(23 ft)	(600 ft)

#### **Data security**

Special measures are necessary to ensure the highest level of security for device access and data transport. On initial setup, the camera is only accessible over secure channels. You must set a service-level password in order to access camera functions. Web browser and viewing client access can be protected using HTTPS or other secure protocols that support state-of-the-art TLS 1.2 protocol with updated cipher suites including AES encryption with 256 bit keys. No software can be installed in the camera, and only authenticated firmware can be uploaded. A threelevel password protection with security recommendations allows users to customize device access. Network and device access can be protected using 802.1x network authentication with EAP/TLS protocol. Superior protection from malicious attacks is guaranteed by the Embedded Login Firewall, on-board Trusted Platform Module (TPM) and Public Key Infrastructure (PKI) support.

The advanced certificate handling offers:

- Self-signed unique certificates automatically created when required
- Client and server certificates for authentication
- Client certificates for proof of authenticity
- · Certificates with encrypted private keys

#### Software sealing

After camera configuration is set and should not be changed, system administrators can enable software protection that seals the camera configuration. Any change of the sealing status and any change to static configuration, accidentally or intentional, will break the seal. The camera then sends an alarm message that the video management system can use to start an

appropriate alarm scenario. The camera creates a separate log file of all changes that have an effect on the sealing status.

#### System integration and ONVIF conformance

The camera conforms to the ONVIF Profile S, ONVIF Profile G and ONVIF Profile T specifications. For H.265 configuration, the camera supports Media Service 2, which is part of ONVIF Profile T. Compliance with these standards guarantees interoperability between network video products regardless of manufacturer. Third-party integrators can easily access the internal feature set of the camera for integration into large projects. Visit the Bosch Integration Partner Program (IPP) website (ipp.boschsecurity.com) for more information.

#### PTZ drive and mechanism

The camera supports 256 pre-positions and two styles of Guard Tours: Pre-position and Record/Playback. The Pre-position tour has capability for up to 256 pre-positions with a configurable dwell time between pre-positions and can be customized as to the order and the frequency that each Pre-position is visited. The camera also provides support for two (2) recorded tours, which have a total duration of 15 minutes of movements. These are recorded macros of an operator's movements, including pan, tilt, and zoom activities, and can be played back in a continuous manner.

Pan and tilt preset repeatability are accurate to within  $\pm 0.1$  degrees to ensure that the correct scene is captured every time. The camera delivers maximum pan speed of 240 degrees per second and maximum tilt speed of  $160^{\circ}$  degrees per second. The camera is capable of manual speeds (pan and tilt) of 0.1 to 120 degrees per second. The camera provides a pan range of up to 360 degrees continuous rotation.

#### Snap to zoom

Drawing a box in the image will trigger the camera to zoom to the correct position.

#### Ease of installation and servicing

The camera has been designed for quick and easy installation, a key feature from Bosch IP video security products.

Bosch designed the camera with the knowledge that field cables and mounts are installed before the camera is mounted. The installation concept allows a single person to connect the cables directly to the camera without re-routing cables. The camera is easily secured to the mount with a single screw.

The camera is rated to provide IP66 protection and offer an operating temperature range down to -40 °C (-40 °F). The housing comes fully assembled with a sunshield and ready for wall or pipe applications with the proper mounting hardware (sold separately).

#### **Project Assistant**

Project Assistant by Bosch is the market's most easy-to-use app for initial installation and basic configuration of IP cameras. Off-site and without connection to the camera, basic configurations can already be covered and shared with colleagues. Onsite, these pre-configurations can simply be pushed onto the camera, making the installation procedure easier and less time consuming. Already configured cameras can be integrated as well. The app allows easy viewing and adjustment of the camera's field of view. The app automatically generates a comprehensive report of the commissioned cameras.

#### Certifications and approvals

#### HD standards

- Complies with the SMPTE 274M-2008 Standard in:
  - Resolution: 1920x1080
  - Scan: Progressive
  - Color representation: complies with ITU-R BT.709
  - Aspect ratio: 16:9
  - Frame rate: 25 and 30 frames/s
- · Complies with the 296M-2001 Standard in:
  - Resolution: 1280x720
  - Scan: Progressive
  - Color representation: complies with ITU-R BT.709
  - Aspect ratio: 16:9
  - Frame rate: 25 and 30 frames/s

Marking	Applicable Standard
cULus	• UL60950-1/-22 (ed 2) (Includes CSA 22.2 No. 60950-1/-22)
FCC Part 15 (USA)	<ul><li>47CFR Part 15</li><li>ICES-003 (Canada)</li></ul>
CE (Europe)	Electromagnetic Compatibility (EMC)  Directive  EN55032:2012/AC:2013  EN 50130-4:2011/A1:2014  EN 61000-3-2:2014  EN 61000-3-3:2013  Product Safety: Low Voltage Directive (IECEE CB scheme certificate and report are required)  EN 60950-1:2006+A11:2009+A1:2010  +A12:2011+A2:2013 (with national differences)  IEC 60950-1/-22 (ed 1)
Other labels / markings	RCM, EAC, WEEE, China RoHS, BIS


#### EAC = NDP-5512-Z30L

For a full list of all related certifications/standards, refer to the Product Tests Report, available on the online catalog, on the Documents tab of the product page for your device. If the document is unavailable on the product page, contact your sales representative.


## **4** | AUTODOME IP starlight 5000i IR

Region	Regulatory compliance/quality marks		
Europe	CE	Declaration of Conformity (DoC) - AUTO- DOME IP starlight 5000i,-IR	
USA	UL	AUTODOME IP starlight 5000i	


## Installation/configuration notes



Wall mount with surveillance cabinet (IP66)



Pole mount (IP66); Corner mount (IP66)



Roof mount (IP66)

For more options, see Quick Selection Guide: Modular camera mounts & accessories.

## **Technical specifications**

Imager	1/2.8" progressive scan CMOS
Effective Picture Elements	1945 x 1097 (2.13 MP)

Lens	30x zoom 4.5 mm - 135 mm (F1.6 - F4.4)
Optical Zoom Field of View (FOV)	2.4° - 60.9°
Focus	Automatic with manual override
Iris	Automatic with iris priority feature
Digital Zoom	16x

### Video performance - Sensitivity

(3100K, reflectivity 89%, 1/30, F1.6, 30 IRE)

Color	0.0186 lux
Mono	0.004 lux

#### **Additional Camera Settings**

Gain control  AGC, Variable 6 dB to 71 dB  Electronic Shutter Speed (AES)  Signal-to-Noise Ratio (SNR)  Day/Night switch  Backlight compensation (BLC)  White balance  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  AGC, Variable 6 dB to 71 dB  On / 0ff / Indelligent Auto Exposure (IAE)  Mutomatic IR cut filter  On / Off / Intelligent Auto Exposure (IAE)  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Improves visibility when viewing foggy or other low-contrast scenes.			
Signal-to-Noise Ratio (SNR)  Day/Night switch  Backlight compensation (BLC)  White balance  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  S55 dB  On / Off / Intelligent Auto Exposure (IAE)  Monochrome, Auto Exposure (IAE)  Monochrome, Color, Auto  Defog mode feature	Gain control	AGC, Variable 6 dB to 71 dB	
(SNR)  Day/Night switch  Automatic IR cut filter  Backlight compensation (BLC)  White balance  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  Improves visibility when viewing foggy or		0.64 sec to 1/66666 sec	
Backlight compensation (BLC)  White balance  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  Improves visibility when viewing foggy or	0	>55 dB	
(BLC)  White balance  Basic auto, Standard auto, Sodium lamp auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  Improves visibility when viewing foggy or	Day/Night switch	Automatic IR cut filter	
auto, Dominant color auto, Manual  Day/Night (mode)  Monochrome, Color, Auto  Defog mode feature  Improves visibility when viewing foggy or	• .	On / Off / Intelligent Auto Exposure (IAE)	
Defog mode feature Improves visibility when viewing foggy or	White balance		
	Day/Night (mode)	Monochrome, Color, Auto	
	Defog mode feature		

Dynamic range	
High dynamic range	120 dB WDR
Measured according to IEC 62676 Part 5	107 dB WDR
Number of LEDs	4
Wavelength	850 nm
Distance	180 m (590 ft) (Detection)
Beam angle	Wide beam: 36° Narrow beam: 6.3°

Video content analysis		
Analysis type	Essential Video Analytics	
Configurations	Silent VCA / Profile1 - 16	

<sup>\*</sup> optional for flat roof mount

Video content analys	sis
Alarm rules (combinable)	Any object Object in field Crossing line Entering field Leaving field Loitering Following route Idle object Removed object Counter Occupancy Crowd detection Condition change Similarity search Tampering
Object filters	Duration Size Aspect ratio v/h Speed Direction Color Object classes (Upright persons, Bikes, Cars, Trucks)
Calibration	Automatic self-calibrating when height is set
Mechanical	
Pan/Tilt Modes	Normal: 0.1°/s - 120°/s Turbo: Pan: 0.1°/s - 240°/s; Tilt: 0.1°/s - 120°/s
Preset Speed	Pan: 240°/s Tilt: 160°/s
Pan Range	360° continuous
Tilt Angle	-90° to 3° (Auto-flip 186°)
Pre-position Accuracy	± 0.1° typ.
Pre-positions	256
Tours	Two (2) types of tours:  Recorded tours: two (2), maximum total duration 15 minutes (depending on the amount of commands sent during recording)  Pre-position tour: one (1), consisting of up to 256 scenes consecutively, and one (1), customized up to 64 scenes
Electrical	
Input voltage	24 VAC and PoE+

Network		
Video compression	H.265 H.264 M-JPEG	
Streaming	Four (4) streams: Two (2) configurable streams in H.264 or H.265 One (1) I-frames-only stream based on first stream One (1) M-JPEG Stream	
Frame rate	60fps at all resolutions	
IP delay (typical)	60 fps: 200 ms	
Resolution (H x V)		
1080p Full HD (16:9)	1920 x 1080	
720p HD (16:9)	1280 x 720	
1.3MP (5:4)	1280 x 1024 cropped	
D1 4:3 (cropped) (4:3)	704 x 576	
640x480 (4:3)	640x480 cropped	
432p SD	768 x 432	
288p SD	512 x 288	

Bitrate	The average typical optimized bitrate in kbits/ second for various frame rates is shown in the following table:		
Video compression	H.265		
IPS	1080p	720p	
60	1649	1249	
30	1413	1096	
15	1157	902	
10	1075	841	
5	746	597	

Ethernet	10/100BASE-T
Encryption	TLS 1.0, SSL, DES, 3DES, AES
Protocols	IPv4, IPv6, UDP, TCP, HTTP, HTTPS, RTP/RTCP, IGMP V2/V3, ICMP, ICMPv6, RTSP, FTP, ARP, DHCP, APIPA (Auto-IP, link local address), NTP (SNTP), SNMP (V1, V3, MIB-II), 802.1x, DNS, DNSv6, DDNS (DynDNS.org, selfHOST.de, noip.com), SMTP, iSCSI, UPnP (SSDP), DiffServ (QoS), LLDP, SOAP, Dropbox™, CHAP, digest authentication
Interoperability	ONVIF Profile S, ONVIF Profile G, ONVIF Profile T, GB/T 28181

Audio	
Compression	G.711, 8kHz sampling rate L16, 16kHz sampling rate AAC, 16kHz sampling rate
Interface	1/1 Channel In/Out
B.4. II	

#### Miscellaneous

Sector/Titling	16 independent sectors with 20 characters per title
Privacy Masks	32 individually configurable privacy masks
Privacy Masks pattern	Black, White , Gray, Auto (average background color)
Supported Languages	English, German, Spanish, French, Italian, Dutch, Polish, Portuguese, Russian, Japanese, Chinese (simplified)

## **Local Storage**

Memory card slot	Support a memory card with a maximum of 32 GB (microSDHC) / 2 TB (microSDXC) (usersupplied). (An SD card of Class 6 or higher is
	recommended for HD recording.)

## **User Connections**

Power	RJ45 10/100 Base-T PoE+ (IEEE 802.3at, class 4 standard) 21-30 VAC, 50/60 Hz
Alarm Inputs	2
Alarm Outputs	1 relay output 5 VDC, 150 mA max.
Audio	1x mono line in, 1x mono line out
Signal line in	94 kOhm typical, 1 Vrms max.
Signal line out	1 kOhm typical, 1 Vrms max.


## **Environmental**

Ingress Protection Rating/ Standard	IP66
Operating temperature (Input voltage 24 VAC)	-40 °C to +60 °C (-40 °F to +140 °F)
Operating temperature (Input voltage PoE+)	-40 °C to +55 °C (-40 °F to +122 °F)
Humidity	Up to 90% RH (non-condensing)
Storage temperature	-40 °C to +60 °C (-40 °F to +140 °F)

#### Construction

Dimensions (DIA x H)	207 mm x 346.6 mm (8.15 in x 13.65 in)
Weight	4.6 kg (10.14 lb)
Construction material	Housing: Aluminum Sunshield: Outdoor Grade Plastic
Standard color	White (RAL 9003)

## **Dimensional Drawings**

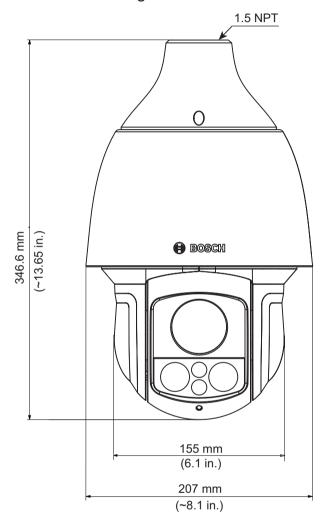

#### **Ordering information**

#### NDP-5512-Z30L-P PTZ 2MP HDR 30x IP66 pendant IR

IP PTZ dome camera; integrated IR illumination up to 180 m (590 ft); 1080p60; 30x optical; 4x4 digital zoom; 120 dB HDR; starlight imaging; IAE; EVA; PoE; Intelligent Streaming; Dual power options.

Order number NDP-5512-Z30L-P

## EWE-AD5HD-IW 12mths wrty ext AUTODOME IP 5000

12 months warranty extension without moving parts, wear parts are excluded

Order number EWE-AD5HD-IW

#### NDP-5512-Z30L PTZ 2MP HDR 30x IP66 pendant IR

IP PTZ dome camera; integrated IR illumination up to 180 m (590 ft); 1080p60; 30x optical; 4x4 digital zoom; 120 dB HDR; starlight imaging; IAE; EVA; PoE; Intelligent Streaming; Dual power options.

Order number NDP-5512-Z30L

## EWE-AD5HD-IW 12mths wrty ext AUTODOME IP 5000 HD

12 months warranty extension without moving parts, wear parts are excluded

Order number EWE-AD5HD-IW

#### **Accessories**

## UPA-2450-50 PSU, 220VAC 50Hz, 24VAC 50VA out

Indoor power supply for camera. 220 VAC, 50 Hz in; 24 VAC, 50 VA out

Order number UPA-2450-50

#### UPA-2450-60 PSU, 120VAC 60Hz, 24VAC 50VA out

Indoor power supply for camera. 120 VAC, 60 Hz In; 24 VAC, 50 VA Out

Order number UPA-2450-60

#### NPD-6001B Midspan, 60W, single port, AC in

60 W indoor midspan for cameras without illuminators Order number NPD-6001B

#### NDA-U-PA0 Surveillance cabinet 24VAC

Surveillance cabinet, 24 VAC input, 24 VAC output, IP66

Order number NDA-U-PA0

#### NDA-U-PA1 Surveillance cabinet 120VAC

Surveillance cabinet, 100 - 120 VAC 50/60 Hz input, 24 VAC output, IP66

Order number NDA-U-PA1

#### NDA-U-PA2 Surveillance cabinet 230VAC

Surveillance cabinet, 230 VAC input, 24 VAC output, IP66

Order number NDA-U-PA2

#### NDA-U-CMT Corner mount adapter

Universal corner mount, white Order number NDA-U-CMT

#### NDA-U-PMAL Pole mount adapter large

Universal pole mount adapter, white; large Order number NDA-U-PMAL

#### NDA-U-PMAS Pole mount adapter small

Pole mount adapter small Universal pole mount adapter, white; small. Order number NDA-U-PMAS

#### NDA-U-PMT Pendant pipe mount, 12" (31cm)

Universal pipe mount for dome cameras, 31 cm, white Order number NDA-U-PMT

#### NDA-U-PMTE Pendant pipe extension, 20" (50cm)

Extension for universal pipe mount, 50 cm, white Order number NDA-U-PMTE

#### NDA-U-PSMB Pendant wall/ceiling mount SMB

Surface mount box (SMB) for wall mount or pipe mount.

Order number NDA-U-PSMB

#### NDA-U-WMP Wall mount plate

Back plate for universal wall mount, corner mount and pole mount, white, IP66
Order number NDA-U-WMP

#### NDA-U-WMT Pendant wall mount

Universal wall mount for dome cameras, white Order number **NDA-U-WMT** 

#### **NDA-U-RMT Pendant parapet mount**

Universal roof mount for dome cameras, white Order number NDA-U-RMT

#### LTC 9230/01 Parapet roof mount adapter

Flat Roof Mount Adapter for mounting a unit in an upright position on a flat surface.

Order number LTC 9230/01

#### VG4-SFPSCKT ETHERNET TO SFP INTERFACE KIT

Ethernet media converter video transmitter/data receiver fiber optic kit for AUTODOME cameras, for MIC-IP-PSU for MIC analog cameras and for the Surveillance cabinets (NDA-U-PA0, NDA-U-PA1 and NDA-U-PA2).

Order number VG4-SFPSCKT

#### SFP-2 Fiber module, multimode, 1310nm, 2LC

SFP Fiber Optic Module, 2 km (1.2 miles), 2 LC connectors.

Multi-mode 1310 mm

Order number SFP-2

### SFP-3 Fiber module, single-mode, 1310nm, 2LC

SFP Fiber Optic Module, 20 km (12.4 miles), 2 LC connectors.

Single-mode

1310 nm

Order number SFP-3

## 8 | AUTODOME IP starlight 5000i IR

SFP-25 Fiber module, 1310/1550nm, 1SC

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector Multi-mode 1310/1550 nm Order number SFP-25

SFP-26 Fiber module, 1550/1310nm, 1SC

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector

Multi-mode 1550/1310 nm Order number SFP-26

#### **Software Options**

MVS-FCOM-PRCL License key for serial protocol

Serial Protocol Software License (e-license) for IP Cameras

Order number MVS-FCOM-PRCL

#### Represented by:

Europe, Middle East, Africa: Bosch Security Systems B.V. P.O. Box 80002 5600 JB Eindhoven, The Netherlands Phone: + 31 40 2577 284 emea.securitysystems@bosch.com emea.boschsecurity.com

Bosch Sicherheitssysteme GmbH Robert-Bosch-Ring 5 85630 Grasbrunn German www.boschsecurity.com

North America: Bosch Security Systems, LLC 130 Perinton Parkway Fairport, New York, 14450, USA Phone: +1 800 289 0096 Fax: +1 585 223 9180 onlinehelp@us.bosch.com www.boschsecurity.us

Robert Bosch (SEA) Pte Ltd, Security Systems Hobert Bosch (SEA) Pte Ltd, Sect 11 Bishan Street 21 Singapore 573943 Phone: +65 6571 2808 Fax: +65 6571 2699 apr.securitysystems@bosch.com www.boschsecurity.asia