


C22x23 Series

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

22 x

Applicable to **1**

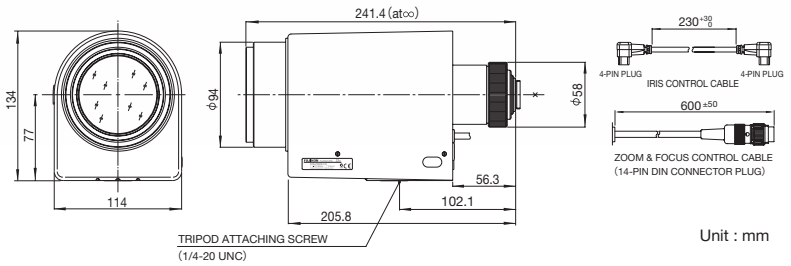

Unit : mm

Day Night

Zoom Motor Drive Telephoto Long Focal Video Auto Iris Iris-Remote C Mount Metal Mount Potentiometer ND Filter PC Control Full Servo RoHS Compliant
ZOOM MOTOR DRIVE TELE VIDEO IRIS-REMOTE C-mt METAL PRESET ND PC SERVO RoHS
 -V41 -ZP1 -ZP1

		Applicable to 1	Applicable to 1
		C22x23R2D-V41	C22x23R2D-ZP1
Focal Length (mm)		23 - 506(22x)	
Iris Range		F3.1 - T3000(Equivalent to F3000)	
Operation	Zoom	Motor Drive	Servo Control
	Focus	Motor Drive	Servo Control
	Iris	Auto(Video Type)or Remote*1	Auto(Video Type), Remote*1 or Servo Control
Angle Of View (H×V)	1°	WIDE TELE	31° 06' × 23° 35' 1° 27' × 1° 05'
Focusing Range (From Front Of The Lens) (m)		∞ - 3	
ObjectDimensions at M.O.D.(H×V) (mm)	1°	WIDE TELE	1611 × 1208 73 × 55
Back Focal Distance (in air) (mm)		39.54	
Exit Pupil Position (From Image Plane) (mm)		-64	
Filter Thread (mm)		M82 × 0.75	
Mass (kg)		2.4	
Wiring Diagram		P26	


* 1 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 27).

C22x17 Series

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

22 x

Applicable to **1**

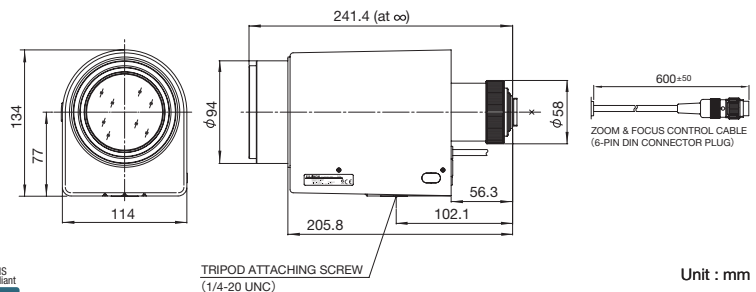

Unit : mm

Day Night

Zoom Motor Drive Wide Angle Telephoto Long Focal Video Auto Iris Iris-Remote C Mount Metal Mount Potentiometer ND Filter RoHS Compliant
ZOOM MOTOR DRIVE WIDE TELE VIDEO C-mt METAL PRESET ND RoHS
 -Y41 -Y41 -Y41

		Applicable to 1	Applicable to 1
		C22x17B-Y41	C22x17R2D-ZP1
Focal Length (mm)		17 - 374(22x)	
Iris Range		F2.3 - T3000 (Equivalent to F3000)	
Operation	Zoom	Motor Drive	Servo Control
	Focus	Motor Drive	Servo Control
	Iris	Auto(Video Type)or Remote*1	Auto(Video Type) or Servo Control
Angle Of View (H×V)	1°	WIDE TELE	41° 16' × 31° 32' 1° 58' × 1° 28'
Focusing Range (From Front Of The Lens) (m)		∞ - 3	
ObjectDimensions at M.O.D.(H×V) (mm)	1°	WIDE TELE	2178 × 1633 99 × 74
Back Focal Distance (in air) (mm)		67.38	
Exit Pupil Position (From Image Plane) (mm)		-127	
Filter Thread (mm)		M82 × 0.75	
Mass (kg)		2.3	
Wiring Diagram		P26	

* 1 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 27).