


PWR-24AC-16-8UL

16 Camera 24VAC 8Amp Power Supply

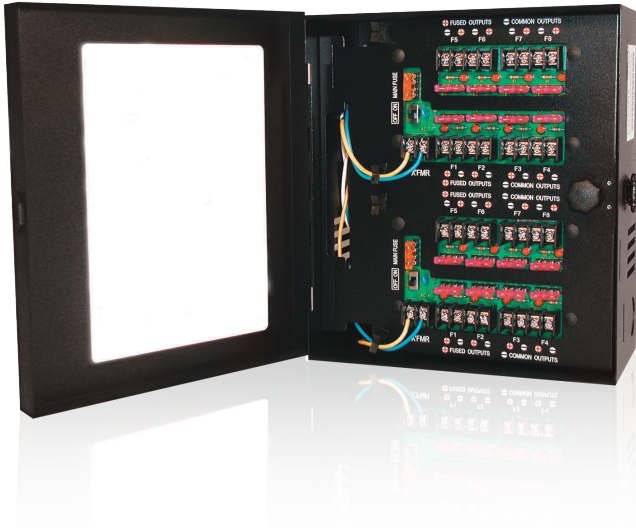

The PWR-24AC-16-8UL is a UL listed CCTV power center engineered to manage remote camera and accessory power requirements. The PWR-24AC-16-8UL distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories. It will provide 24Volts AC to sixteen fused outputs with a total of 8.0 Amps continuous supply current via two 4.0 Amp supplies. The PWR-24AC-16-8UL power center is housed in a premium heavy gauge metal enclosure.

Key Features

- Convenient screw and terminal and fuse access
- AC power LED indicator
- Includes transformer and spare fuses
- Lockable heavy gauge metal enclosure
- Uses easy to find automotive style fuses

Technical Specifications

PWR-24AC-16-8UL

FEATURES

Convenient screw and terminal and fuse access
Separation panel between transformers and output access
Power ON/OFF switch
Individual LED's for each fused output
AC power LED indicator
Double coated polyurethane finish
Multiple knockouts to accommodate various wiring configurations
Uses easy to find automotive style fuses
Includes transformer and spare fuses
Lockable heavy gauge metal enclosure

SPECIFICATIONS

Input	115VAC 50/60 HZ; 1.8 Amps
Output	3 Amps
Two 4 Amp 100 VA supply currents at 70°F	
Fuse	5 Amps
Sixteen 24VAC individually fused outputs	
Unit maintains camera synchronization	
Transformers	Two (2) 110VAC/24VAC, 100VA
Enclosure Dimensions	254 x 228.6 x 114.3mm (10" x 9" x 4.5")
UL listed	

Dimensions

Unit : mm (inch)

